

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 April 2004 (29.04.2004)


PCT

(10) International Publication Number
WO 2004/035358 A2

- (51) International Patent Classification⁷: **B60S 1/48**, F24H 1/12, F28F 3/12, 19/00
- (74) Agents: SANFORD T. COLB & CO. et al.; P.O. Box 2273, 76122 Rehovot (IL).
- (21) International Application Number: PCT/IL2003/000854
- (22) International Filing Date: 21 October 2003 (21.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/420,001 21 October 2002 (21.10.2002) US
60/451,600 3 March 2003 (03.03.2003) US
- (71) Applicant (for all designated States except US): MICRO-HEAT INC. [US/US]; 37525 Enterprise Court, Farmington Hill, MI 48311 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): ARKASHEVSKI, Uri [IL/IL]; 36 Vaad Arba Arazot Street, 49300 Petach Tikva (IL). ROGOZINSKI, Joseph [IL/IL]; 14 Motza Street, 52366 Ramat Gan (IL). IVANOV, Vychislav [IL/IL]; 14/7 Iris Street, 36063 Kiriya Tivon (IL).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR CLEANING OR DE-ICING VEHICLE ELEMENTS

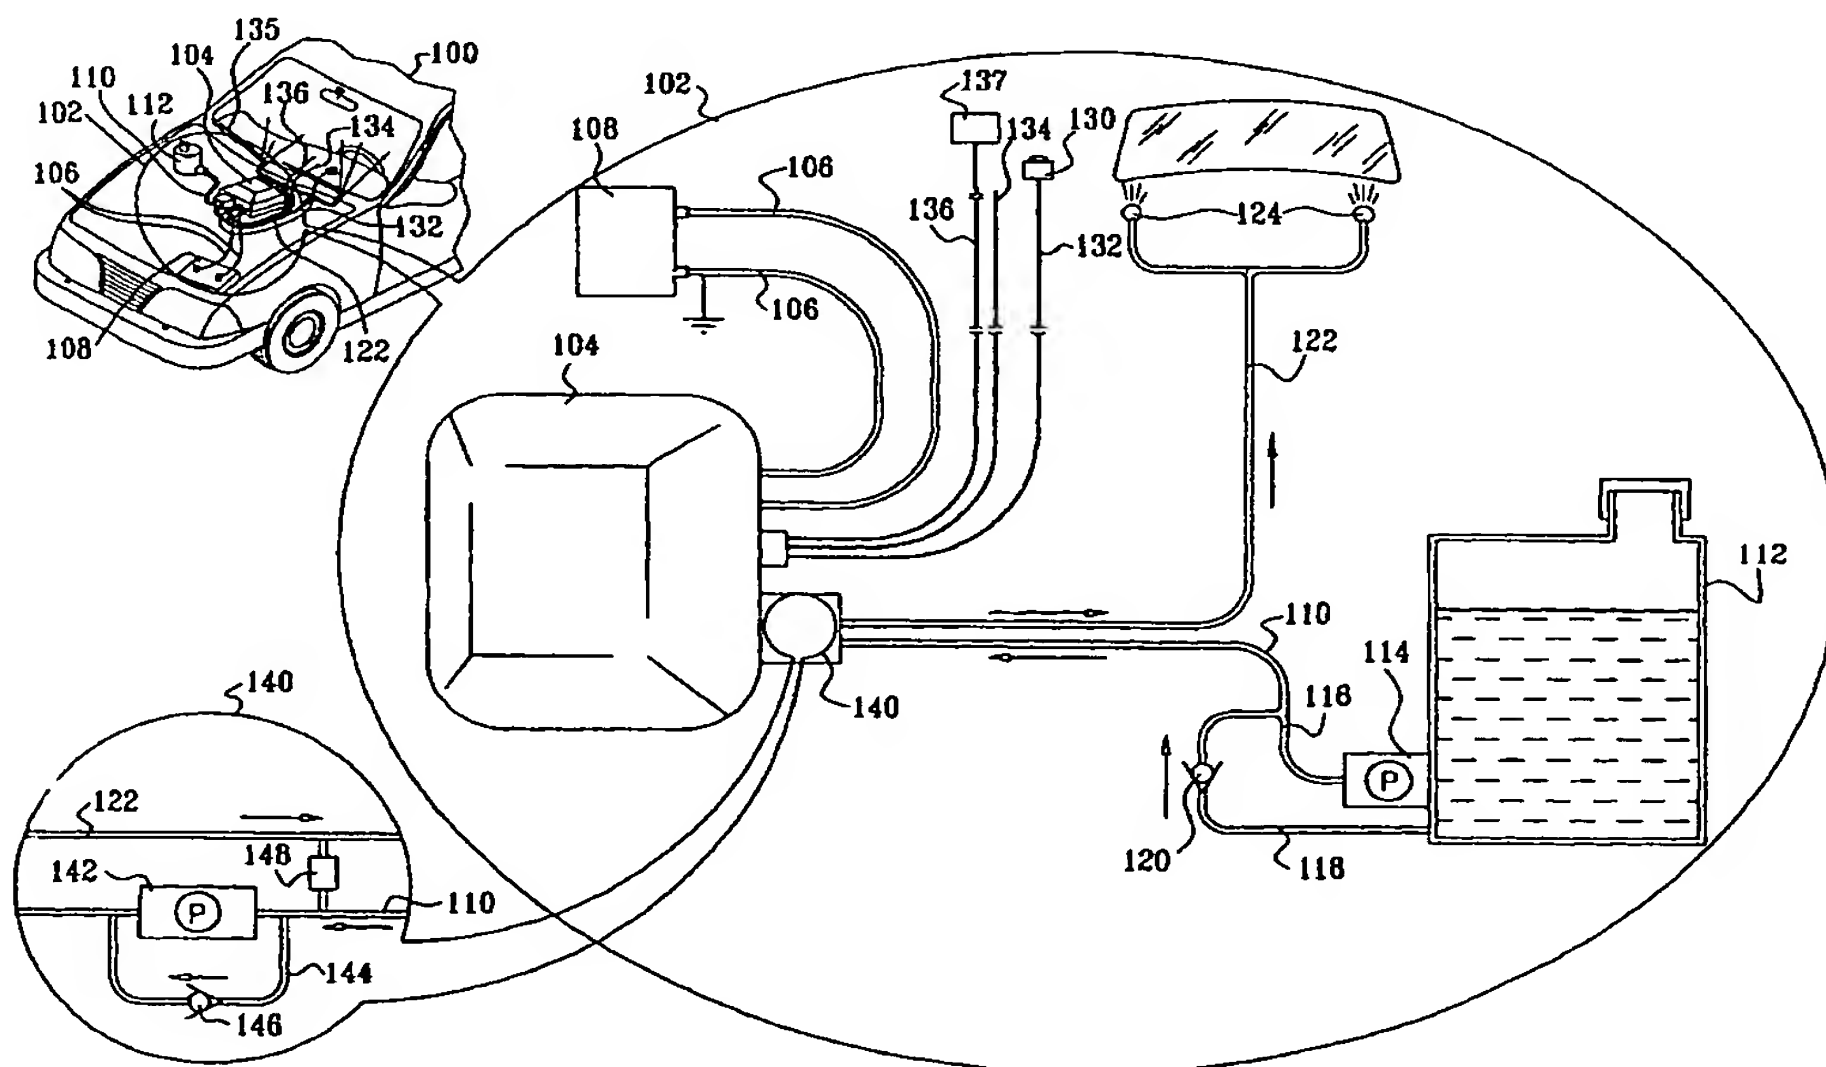

(57) Abstract: A liquid heating assembly including a heat-conductive displacable element and a liquid heating enclosure defining a liquid heating volume including a primary liquid heating volume portion and a secondary liquid heating volume portion, separated by the heat-conductive displacable element, the primary liquid heating volume portion including a heat exchanger for directly heating liquid in the primary liquid heating volume portion and for indirectly heating liquid in the secondary liquid heating volume portion via the heat-conductive displacement element. 1

WO 2004/035358 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

APPARATUS AND METHOD FOR CLEANING OR DE-ICING VEHICLE
ELEMENTS

REFERENCE TO CO-PENDING APPLICATIONS

Applicant hereby claims priority of U.S. Provisional Patent Application
Serial No. 60/451,600 filed on March 3, 2003, entitled "System And Method For Swift
Cleaning Or De-Icing Windshields" and U.S. Provisional Patent Application Serial No.
60/420,001, filed October 21, 2002, entitled " System And Method For Swift Cleaning
Or Deicing Windshields "

FIELD OF THE INVENTION

The present invention relates generally to apparatus and method for
cleaning or de-icing vehicle elements.

BACKGROUND OF THE INVENTION

The following publications are believed to represent the current state of
the art:

U.S. Patents: 6,164,564; 6,199,587; 5,509,606; 5,118,040; 4,090,668;
5,012,977; 5,354,965; 3,979,068; 4,090,668; 4,106,508; 5,012,977; 5,118,040;
5,254,083; 5,354,965; 5,383,247; 5,509,606; 5,927,608; 5,947,348 and 5,988,529.

Published PCT Applications: WO 02/092237, WO 00/27540 and WO
98/58826.

SUMMARY OF THE INVENTION

5 The present invention seeks to provide improved apparatus and method for cleaning or de-icing vehicle elements.

There is thus provided in accordance with a preferred embodiment of the present invention a liquid heating assembly including a heat-conductive displaceable element and a liquid heating enclosure defining a liquid heating volume including a primary liquid heating volume portion and a secondary liquid heating volume portion,
10 separated by the heat-conductive displaceable element, the primary liquid heating volume portion including a heat exchanger for directly heating liquid in the primary liquid heating volume portion and for indirectly heating liquid in the secondary liquid heating volume portion via the heat-conductive displacement element.

In accordance with another preferred embodiment of the present
15 invention the heat-conductive displaceable element includes a resilient, flexible element. Additionally or alternatively, the heat-conductive displaceable element forms at least a wall both of the primary liquid heating volume portion and of the secondary liquid heating volume portion.

In accordance with yet another preferred embodiment of the present
20 invention at least the liquid heating enclosure defines a primary liquid flow pathway in the primary liquid heating volume portion and a secondary liquid flow pathway in the secondary liquid heating volume portion, the secondary liquid flow pathway supplying liquid to the primary liquid flow pathway.

Preferably, the primary liquid heating volume portion is formed of a
25 relatively rigid, highly heat conductive material. Additionally, the secondary liquid heating volume portion is formed of a material which is less rigid and less heat conductive than the material forming the primary liquid heating volume portion.

In accordance with another preferred embodiment of the present invention at least the primary liquid flow pathway is defined by the liquid heating
30 enclosure and by the heat-conductive displacement element. In accordance with yet another preferred embodiment of the present invention at least the liquid heating enclosure defines an at least partially turbulent flow primary liquid flow pathway in the

primary liquid heating volume portion and an at least partially turbulent flow secondary liquid flow pathway in the secondary liquid heating volume portion, the at least partially turbulent flow secondary liquid flow pathway supplying liquid to the at least partially turbulent flow primary liquid flow pathway.

5 In accordance with still another preferred embodiment of the present invention the primary liquid heating volume portion is formed at least partially of a metal material, which is relatively highly heat conductive and the secondary liquid heating volume portion is formed at least partially of a plastic material, which is relatively heat insulative, separated by the heat-conductive displaceable element,
10 formed of a material which is less heat conductive than the metal material. Additionally, the heat-conductive displaceable element is formed of a material which is more heat conductive than the plastic material.

In accordance with another preferred embodiment of the present invention the heat-conductive displaceable element is apertured to permit liquid
15 communication from the secondary liquid heating volume portion to the primary liquid heating volume portion.

In accordance with another preferred embodiment of the present invention the secondary liquid heating volume portion includes at least one displaceable outer wall portion providing freeze protection by virtue of its displaceability.
20 Additionally, the heat-conductive displaceable element is operative to be displaced into the secondary liquid heating volume portion upon freezing of liquid inside the primary liquid heating volume portion.

In accordance with yet another preferred embodiment of the present invention the heat-conductive displaceable element is an intervening liquid
25 impermeable diaphragm.

In accordance with still another preferred embodiment of the present invention the primary liquid heating volume portion is a first conduit element and the secondary liquid heating volume portion is a second conduit element. Additionally, the heat exchanger is defined by the first conduit element and the second conduit element.

30 There is also provided in accordance with another preferred embodiment of the present invention vehicle including a vehicle chassis including a drive train, a vehicle body including at least one vehicle surface which requires washing, a vehicle

washing liquid reservoir, a vehicle washing liquid discharge assembly, a vehicle surface washer assembly operative to employ the vehicle washing liquid discharge assembly and a washing liquid from the vehicle washing liquid reservoir for washing the at least one vehicle surface which requires washing and a liquid heating assembly operative to
5 employ the vehicle washing liquid discharge assembly and the washing liquid from the vehicle washing liquid reservoir for providing a spray of heated liquid onto the at least one vehicle surface which requires washing, the liquid heating assembly including a heat-conductive displaceable element and a liquid heating enclosure defining a liquid heating volume including a primary liquid heating volume portion and a secondary
10 liquid heating volume portion, separated by the heat-conductive displaceable element, the primary liquid heating volume portion including a heat exchanger for directly heating liquid in the primary liquid heating volume portion and for indirectly heating liquid in the secondary liquid heating volume portion via the heat-conductive displacement element.

15 There is further provided in accordance with yet another preferred embodiment of the present invention a vehicle including a vehicle chassis including a drive train, a vehicle body including at least one vehicle surface which requires washing, a vehicle washing liquid reservoir, a vehicle washing liquid discharge assembly, a vehicle surface washer assembly operative to employ the vehicle washing
20 liquid discharge assembly and a washing liquid from the vehicle washing liquid reservoir for washing the at least one vehicle surface which requires washing, a liquid heating assembly operative to employ the vehicle washing liquid discharge assembly and the washing liquid from the vehicle washing liquid reservoir for providing a spray of heated liquid onto the at least one surface which requires washing and a normally
25 closed automatically operative valve interconnecting the vehicle washing liquid reservoir to the vehicle washing liquid discharge assembly and being operative, when open, to bypass the liquid heating assembly.

In accordance with another preferred embodiment of the present invention the vehicle also includes a vehicle pump connected upstream of the at least
30 one vehicle washing liquid reservoir and downstream of the normally closed automatically operative valve. Additionally or alternatively, the liquid heating assembly includes a heat-conductive displaceable element and a liquid heating enclosure defining

a liquid heating volume including a primary liquid heating volume portion and a secondary liquid heating volume portion, separated by the heat-conductive displaceable element, the primary liquid heating volume portion including a heat exchanger for directly heating liquid in the primary liquid heating volume portion and for indirectly heating liquid in the secondary liquid heating volume portion via the heat-conductive displacement element.

Preferably, the heat-conductive displaceable element includes a resilient, flexible element. Additionally or alternatively, the heat-conductive displaceable element forms at least a wall both of the primary liquid heating volume portion and of the secondary liquid heating volume portion.

In accordance with yet another preferred embodiment of the present invention at least the liquid heating enclosure defines a primary liquid flow pathway in the primary liquid heating volume portion and a secondary liquid flow pathway in the secondary liquid heating volume portion, the secondary liquid flow pathway supplying liquid to the primary liquid flow pathway.

In accordance with still another preferred embodiment of the present invention the primary liquid heating volume portion is formed of a relatively rigid, highly heat conductive material. Additionally, the secondary liquid heating volume portion is formed of a material which is less rigid and less heat conductive than the material forming the primary liquid heating volume portion.

In accordance with another preferred embodiment of the present invention at least the primary liquid flow pathway is defined by the liquid heating enclosure and by the heat-conductive displacement element. Additionally or alternatively, at least the liquid heating enclosure defines an at least partially turbulent flow primary liquid flow pathway in the primary liquid heating volume portion and an at least partially turbulent flow secondary liquid flow pathway in the secondary liquid heating volume portion, the at least partially turbulent flow secondary liquid flow pathway supplying liquid to the at least partially turbulent flow primary liquid flow pathway. Additionally or alternatively, the primary liquid heating volume portion is formed at least partially of a metal material, which is relatively highly heat conductive and the secondary liquid heating volume portion is formed at least partially of a plastic material, which is relatively heat insulative, separated by the heat-conductive

displaceable element, formed of a material which is less heat conductive than the metal material. Preferably, the heat-conductive displaceable element is formed of a material which is more heat conductive than the plastic material.

5 In accordance with yet another preferred embodiment of the present invention the heat-conductive displaceable element is apertured to permit liquid communication from the secondary liquid heating volume portion to the primary liquid heating volume portion. Additionally or alternatively, the secondary liquid heating volume portion includes at least one displaceable outer wall portion providing freeze protection by virtue of its displaceability. Additionally, the heat-conductive displaceable
10 element is operative to be displaced into the secondary liquid heating volume portion upon freezing of liquid inside the primary liquid heating volume portion.

In accordance with still another preferred embodiment of the present invention the at least one vehicle surface which requires washing includes at least one of the following surfaces: a front vehicle windshield surface, a back vehicle windshield
15 surface, a side vehicle window surface, a vehicle headlight surface, a vehicle rear light surface, a vehicle radar antenna surface and a vehicle exterior mirror surface.

In accordance with still another preferred embodiment of the present invention the heat-conductive displaceable element is an intervening liquid impermeable diaphragm. In accordance with yet another preferred embodiment of the
20 present invention the primary liquid heating volume portion is a first conduit element and the secondary liquid heating volume portion is a second conduit element. Additionally, the heat exchanger is defined by the first conduit element and the second conduit element.

In accordance with another preferred embodiment of the present
25 invention the normally closed automatically operative valve is a differential pressure responsive one-way valve.

In accordance with still another preferred embodiment of the present invention user activation activates the spray of heated liquid onto the at least one vehicle surface which requires washing. Additionally or alternatively, automatic activation
30 activates the spray of heated liquid onto the at least one vehicle surface which requires washing. Preferably, the automatic activation is provided by an AGC actuation signal.

In accordance with yet another preferred embodiment of the present invention the liquid heating assembly is operative to employ the vehicle washing liquid discharge assembly and the washing liquid from the vehicle washing liquid reservoir for providing a spray of liquid onto a vehicle windshield surface and a vehicle radar antenna surface.

In accordance with still another preferred embodiment of the present invention the vehicle also includes a normally-open valve interconnecting vehicle windshield sprayers of the vehicle windshield surface to the vehicle washing liquid discharge assembly and being operative, when open, to bypass vehicle radar antenna sprayers of the vehicle radar antenna surface. In accordance with another preferred embodiment of the present invention the vehicle also includes a flow restrictor, restricting flow to the vehicle radar antenna sprayers to ensure liquid is supplied to the vehicle windshield sprayers when the normally-open valve is open.

There is further provided in accordance with yet another preferred embodiment of the present invention a liquid heating method including providing a liquid heating enclosure defining a liquid heating volume including a primary liquid heating volume portion and a secondary liquid heating volume portion, separated by a heat-conductive displaceable element and directly heating liquid in the primary liquid heating volume portion, thereby indirectly heating liquid in the secondary liquid heating volume portion via the heat-conductive displacement element.

There is further provided in accordance with still another preferred embodiment of the present invention a vehicle operation method including providing a vehicle including at least one vehicle surface which requires washing and washing the at least one vehicle surface which requires washing by supplying heated liquid from a reservoir as a spray of heated liquid onto the at least one surface which requires washing including causing liquid from the reservoir to be directly heated in a primary liquid heating volume portion and to be indirectly heated in a secondary liquid heating volume portion via a heat-conductive element separating the primary and secondary liquid heating volume portions.

There is yet further provided in accordance with still another preferred embodiment of the present invention a vehicle operation method including providing a vehicle including at least one vehicle surface which requires washing and washing the at

least one vehicle surface which requires washing by at least one of supplying heated liquid from a liquid reservoir via a liquid heating assembly as a spray of heated liquid onto the at least one surface which requires washing and supplying unheated liquid from the liquid reservoir via a normally closed automatically operative valve which, when
5 open, bypasses the liquid heating assembly.

In accordance with another preferred embodiment of the present invention a vehicle pump connects upstream of the liquid reservoir and downstream of the normally closed automatically operative valve.

In accordance with another preferred embodiment of the present
10 invention the vehicle operation method also includes providing a vehicle including the at least one vehicle surface which requires washing and washing the at least one vehicle surface which requires washing by supplying heated liquid from the liquid reservoir as a spray of heated liquid onto the at least one surface which requires washing including causing liquid from the liquid reservoir to be directly heated in a primary liquid heating
15 volume portion and to be indirectly heated in a secondary liquid heating volume portion via a heat-conductive element separating the primary and secondary liquid heating volume portions.

In accordance with another preferred embodiment of the present invention the primary and secondary liquid heating volume portions are defined by a
20 liquid heating enclosure and the primary liquid heating volume portion includes a heat exchanger for directly heating the liquid in the primary liquid heating volume portion and for indirectly heating the liquid in the secondary liquid heating volume portion via the heat-conductive displacement element.

In accordance with still another preferred embodiment of the present
25 invention the heat-conductive displaceable element is resiliently and flexibly displaceable. Additionally or alternatively, the heat-conductive displaceable element separates the primary liquid heating volume portion and the secondary liquid heating volume portion. In accordance with still another preferred embodiment of the present invention the liquid flows into a primary liquid flow pathway in the primary liquid
30 heating volume portion from a secondary liquid flow pathway in the secondary liquid heating volume portion. Additionally or alternatively, at least the liquid flows in at least partially turbulent flow primary liquid flow through the primary liquid heating volume

portion following flowing in at least partially turbulent flow secondary liquid flow through the secondary liquid heating volume portion.

5 In accordance with yet another preferred embodiment of the present invention the liquid flows via an aperture formed in the heat-conductive displaceable element to permit liquid communication from the secondary liquid heating volume portion to the primary liquid heating volume portion.

10 In accordance with another preferred embodiment of the present invention at least one displaceable outer wall portion of the secondary liquid heating volume portion is displaced into the secondary liquid heating volume portion upon freezing of liquid inside the primary liquid heating volume portion.

15 In accordance with another preferred embodiment of the present invention the washing includes an initial spray cycle. Additionally, the indirectly heating liquid in the secondary liquid heating volume portion during a relatively long time duration after initial operation of a motor of the vehicle causes the initial spray cycle to be relatively longer than when the indirectly heating liquid in the secondary liquid heating volume portion is during a relatively short time duration after initial operation of the motor of the vehicle. Additionally, the supplying heated liquid onto the at least one surface is nearly instantaneous when the indirectly heating liquid in the secondary liquid heating volume portion is for a relatively long time duration after the initial operation of the motor of the vehicle.

20 There is also provided in accordance with another preferred embodiment of the present invention a heated liquid discharge system including a main assembly which provides liquid heating and includes electrical and liquid flow control functionalities, a liquid inflow conduit supplying liquid from a liquid reservoir to the main assembly and a liquid outflow conduit supplying liquid to at least one sprayer located at at least one location on a motor vehicle, the main assembly including a liquid heating chamber communicating with the liquid inflow conduit and the liquid outflow conduit and being formed with a liquid drain aperture located on a side thereof which permits draining of liquid from the liquid heating chamber generally down to a level of the liquid drain aperture.

30 In accordance with another preferred embodiment of the present invention the draining takes place when a vehicle pump supplying liquid to the liquid

inflow conduit is not in operation. In accordance with another preferred embodiment of the present invention the at least one location includes at least one of the following locations: front vehicle windshield, back vehicle windshield, side vehicle windows, surface vehicle headlights, vehicle rear lights and vehicle exterior mirrors.

5 In accordance with another preferred embodiment of the present invention a vehicle operator actuation switch is electrically coupled to the main assembly. Additionally or alternatively, the main assembly is connected to a vehicle computer. Alternatively or additionally, the main assembly is connected to a vehicle ignition switch.

10 In accordance with still another preferred embodiment of the present invention the main assembly includes a principal housing portion and a cover housing portion. Additionally, the principal housing portion defines a generally circular cylindrical liquid heating chamber accommodating volume in a major portion of which is disposed a liquid heating assembly including the liquid heating chamber.

15 In accordance with yet another preferred embodiment of the present invention the liquid heating chamber includes a generally circular cylindrical outer sleeve. Additionally, the liquid heating assembly includes a plurality of heating elements located within the liquid heating chamber. In accordance with another preferred embodiment of the present invention electrical characteristics of individual
20 ones of the plurality of heating elements are different from each other.

In accordance with still another preferred embodiment of the present invention the principal housing portion defines a liquid inlet channel and a heated liquid outlet channel, both communicating with the liquid heating chamber accommodating volume and respectively communicating with the liquid inflow conduit and the liquid
25 outflow conduit. Additionally, the principal housing portion also defines a heated liquid temperature sensor mounting aperture which communicates with the liquid heating chamber accommodating volume.

In accordance with yet another preferred embodiment of the present invention liquid supplied to the liquid heating chamber accommodating volume via the
30 liquid inlet channel enters the liquid heating chamber via at least two liquid inlet apertures formed in the liquid heating chamber including a first aperture located near a base of the liquid heating chamber and a second aperture located at an opposite side of

the liquid heating chamber from the first aperture and near a middle of a height of the liquid heating chamber. Additionally, during operation of the vehicle pump supplying liquid to the liquid inflow conduit a level of the liquid exceeds the height of the liquid heating chamber and fills the liquid heating chamber accommodating volume.

5 In accordance with another preferred embodiment of the present invention the liquid drain aperture is located on a side of the liquid heating chamber just below the top thereof, which permits draining of the liquid from the liquid heating chamber accommodating volume generally only down to the level of the liquid drain aperture when the vehicle pump is not in operation. In accordance with still another
10 preferred embodiment of the present invention the liquid from the liquid reservoir is supplied by the vehicle pump via the liquid inlet conduit via a liquid inlet pathway portion of a liquid connector assembly, which also defines a liquid outlet pathway portion.

In accordance with another preferred embodiment of the present
15 invention the liquid connector assembly defines a differential pressure bypass pathway portion, which is controlled by a one-way valve and which permits liquid flow from the liquid inlet pathway portion to the liquid outlet pathway portion when a pressure differential thereacross reaches a predetermined threshold, which indicates the existence of a blockage in a liquid path through the liquid heating chamber accommodating
20 volume. Additionally, the liquid inlet pathway portion includes a leaky one way valve which permits supply of liquid under pressure to the liquid heating chamber accommodating volume but restricts backflow therethrough to a relatively slow rate.

In accordance with a further preferred embodiment of the present invention the liquid passes through the liquid inlet channel, fills the liquid heating
25 ~~chamber~~ accommodating volume and flows into the liquid heating chamber via the first and second apertures. In accordance with still another preferred embodiment of the present invention the liquid is heated in the liquid heating chamber and a temperature of the liquid or of air overlying the liquid, depending on the liquid level of the liquid, is sensed by at least one temperature sensor. In accordance with another preferred
30 embodiment of the present invention the at least one temperature sensor is mounted onto a printed circuit board which is mounted within the principal housing portion and located outside of the liquid heating chamber accommodating volume.

In accordance with another preferred embodiment of the present invention the heated liquid discharge system also includes control circuitry, for operation of the main assembly, which is connected to the at least one temperature sensor.

5 In accordance with yet another preferred embodiment of the present invention the heated liquid discharge system also includes an overheating cut-off fuse for shutting off electrical power to at least part of the main assembly in the event of overheating of the liquid heating chamber. In accordance with still another preferred embodiment of the present invention the fuse is formed with an undersurface of a
10 resilient material and is retained in tight thermal engagement with the underside of a base of the liquid heating element.

In accordance with another preferred embodiment of the present invention the liquid drain aperture together with a leaky one-way valve provides both overheating and anti-freezing protection for the main assembly.

15 In accordance with yet another preferred embodiment of the present invention when the liquid is not being pumped into the liquid heating chamber, the liquid tends to drain slowly from the liquid heating chamber via the leaky one-way valve until a level of liquid in the liquid heating chamber reaches the level of the liquid drain aperture, at which point air, rather than liquid is drawn into the liquid outflow
20 conduit, effectively terminating drainage and retaining liquid inside the liquid heating chamber accommodating volume generally at the level of the liquid drain aperture.

In accordance with still another preferred embodiment of the present invention retention of liquid inside the liquid heating chamber at a level generally not lower than that of the liquid drain aperture ensures that the level of liquid in the liquid
25 heating chamber at least covers most of the heating elements located therein, ensuring rapid heating of the liquid and avoiding burning out of the heating elements due to lack of the liquid in the vicinity thereof and retention of the liquid inside the liquid heating chamber at a level no higher than that of the liquid drain aperture ensures that sufficient freezing expansion volume is provided so that when the vehicle is not being operated
30 and is in a freezing environment, freezing of the liquid therein does not cause cracking of the liquid heating chamber.

There is yet further provided in accordance with yet another preferred embodiment of the present invention a heated liquid discharge system including a main assembly which provides liquid heating and includes electrical and liquid flow control functionalities, a liquid inflow conduit supplying liquid from a liquid reservoir to the main assembly and a liquid outflow conduit supplying liquid to at least one sprayer located at at least one location on a motor vehicle, the liquid inflow conduit having connected in series therewith a leaky one-way valve which permits limited backflow of liquid from the main assembly to the reservoir.

There is even further provided in accordance with yet another preferred embodiment of the present invention a heated liquid discharge system including a main assembly which provides liquid heating and includes electrical and liquid flow control functionalities, a liquid inflow conduit supplying liquid from a liquid reservoir to the main assembly and a liquid outflow conduit supplying liquid to at least one sprayer located at at least one location on a motor vehicle, the main assembly including a liquid heating chamber and an electrical circuit board having mounted thereon a liquid temperature sensor which senses temperature of the liquid in the liquid heating chamber.

In accordance with yet another preferred embodiment of the present invention the main assembly includes a liquid heating chamber communicating with the liquid inflow conduit and the liquid outflow conduit and being formed with a liquid drain aperture located on a side thereof which permits draining of liquid from the liquid heating chamber generally down to level of the liquid drain aperture via the leaky one-way valve.

In accordance with yet another preferred embodiment of the present invention the draining takes place when a vehicle pump supplying liquid to the liquid inflow conduit is not in operation. In accordance with another preferred embodiment of the present invention the at least one location includes at least one of the following locations: front vehicle windshield, back vehicle windshield, side vehicle windows, surface vehicle headlights, vehicle rear lights and vehicle exterior mirrors.

In accordance with still another preferred embodiment of the present invention a vehicle operator actuation switch is electrically coupled to the main assembly. Alternatively or additionally, the main assembly is connected to a vehicle

computer. Additionally or alternatively, the main assembly is connected to a vehicle ignition switch.

5 In accordance with yet another preferred embodiment of the present invention the main assembly includes a principal housing portion and a cover housing portion. Additionally, the principal housing portion defines a generally circular cylindrical liquid heating chamber accommodating volume in a major portion of which is disposed a liquid heating assembly including the liquid heating chamber.

10 In accordance with still another preferred embodiment of the present invention the liquid heating chamber includes a generally circular cylindrical outer sleeve. Preferably, the liquid heating assembly includes a plurality of heating elements located within the liquid heating chamber. Additionally, electrical characteristics of individual ones of the plurality of heating elements are different from each other.

15 In accordance with still another preferred embodiment of the present invention the principal housing portion defines a liquid inlet channel and a heated liquid outlet channel, both communicating with the liquid heating chamber accommodating volume and respectively communicating with the liquid inflow conduit and the liquid outflow conduit. Additionally, the principal housing portion also defines a heated liquid temperature sensor mounting aperture which communicates with the liquid heating chamber accommodating volume. In accordance with yet another preferred embodiment
20 of the present invention liquid supplied to the liquid heating chamber accommodating volume via the liquid inlet channel enters the liquid heating chamber via at least two liquid inlet apertures formed in the liquid heating chamber including a first aperture located near a base of the liquid heating chamber and a second aperture located at an opposite side of the liquid heating chamber from the first aperture and near a middle of
25 a height of the liquid heating chamber.

In accordance with yet another preferred embodiment of the present invention during operation of the vehicle pump supplying liquid to the liquid inflow conduit a level of the liquid exceeds the height of the liquid heating chamber and fills the liquid heating chamber accommodating volume. Additionally, the liquid drain
30 aperture is located on a side of the liquid heating chamber just below the top thereof, which permits draining of the liquid from the liquid heating chamber accommodating volume generally only down to the level of the liquid drain aperture when the vehicle

pump is not in operation. In accordance with another preferred embodiment of the present invention the liquid from the liquid reservoir is supplied by the vehicle pump via the liquid inlet conduit via a liquid inlet pathway portion of a liquid connector assembly, which also defines a liquid outlet pathway portion.

5 In accordance with yet another preferred embodiment of the present invention the liquid connector assembly defines a differential pressure bypass pathway portion, which is controlled by a one-way valve and which permits liquid flow from the liquid inlet pathway portion to the liquid outlet pathway portion when a pressure differential thereacross reaches a predetermined threshold, which indicates the existence
10 of a blockage in a liquid path through the liquid heating chamber accommodating volume. In accordance with yet another preferred embodiment of the present invention the liquid inlet pathway portion includes a leaky one way valve which permits supply of liquid under pressure to the liquid heating chamber accommodating volume but restricts backflow therethrough to a relatively slow rate.

15 In accordance with another preferred embodiment of the present invention the liquid passes through the liquid inlet channel, fills the liquid heating chamber accommodating volume and flows into the liquid heating chamber via the first and second apertures.

In accordance with yet another preferred embodiment of the present
20 invention the liquid is heated in the liquid heating chamber and a temperature of the liquid or of air overlying the liquid, depending on the liquid level of the liquid, is sensed by the liquid temperature sensor.

In accordance with yet another preferred embodiment of the present
25 invention the at liquid temperature sensor is mounted onto a printed circuit board which is mounted within the principal housing portion and located outside of the liquid heating chamber accommodating volume.

In accordance with yet another preferred embodiment of the present invention the heated liquid discharge system also includes control circuitry, for operation of the main assembly, which is connected to the liquid temperature sensor.

30 In accordance with another preferred embodiment of the present invention the heated liquid discharge system also includes an overheating cut-off fuse for shutting off electrical power to at least part of the main assembly in the event of

overheating of the liquid heating chamber. Preferably, the fuse is formed with an undersurface of a resilient material and is retained in tight thermal engagement with the underside of a base of the liquid heating element.

5 In accordance with another preferred embodiment of the present invention the liquid drain aperture together with the leaky one-way valve provides both overheating and anti-freezing protection for the main assembly.

10 In accordance with yet another preferred embodiment of the present invention when the liquid is not being pumped into the liquid heating chamber, the liquid tends to drain slowly from the liquid heating chamber via the leaky one-way valve until a level of liquid in the liquid heating chamber reaches the level of the liquid drain aperture, at which point air, rather than liquid is drawn into the liquid outflow conduit, effectively terminating drainage and retaining liquid inside the liquid heating chamber accommodating volume generally at the level of the liquid drain aperture.

15 In accordance with still another preferred embodiment of the present invention retention of liquid inside the liquid heating chamber at a level generally not lower than that of the liquid drain aperture ensures that the level of liquid in the liquid heating chamber at least covers most of the heating elements located therein, ensuring rapid heating of the liquid and avoiding burning out of the heating elements due to lack of the liquid in the vicinity thereof and retention of the liquid inside the liquid heating chamber at a level no higher than that of the liquid drain aperture ensures that sufficient freezing expansion volume is provided so that when the vehicle is not being operated and is in a freezing environment, freezing of the liquid therein does not cause cracking of the liquid heating chamber.

25 There is yet further provided in accordance with still another preferred embodiment of the present invention a heated liquid discharge method including supplying liquid from a liquid reservoir to a liquid heating chamber included in a main assembly, heating the liquid in the liquid heating chamber, supplying heated liquid from the liquid heating chamber to at least one sprayer located at at least one location on a motor vehicle and draining of liquid to the liquid reservoir from the liquid heating chamber generally down to a predetermined level in the liquid heating chamber.

30 In accordance with another preferred embodiment of the present invention the supplying liquid from a liquid reservoir to a liquid heating chamber is via

a liquid inflow conduit and the supplying heated liquid from the liquid heating chamber to the at least one sprayer located at at least one location on a motor vehicle is via a liquid outflow conduit. Additionally or alternatively, the draining is via a liquid drain aperture located on a side of the liquid heating chamber. Preferably, the draining takes place when a vehicle pump supplying liquid to the liquid inflow conduit is not in operation.

In accordance with yet another preferred embodiment of the present invention the at least one location includes at least one of the following locations: front vehicle windshield, back vehicle windshield, side vehicle windows, surface vehicle headlights, vehicle rear lights and vehicle exterior mirrors.

In accordance with another preferred embodiment of the present invention the heated liquid discharge method also includes electrically coupling a vehicle operator actuation switch to the main assembly.

In accordance with another preferred embodiment of the present invention the heated liquid discharge method also includes connecting the main assembly to a vehicle computer. In accordance with another preferred embodiment of the present invention the heated liquid discharge method also includes connecting the main assembly to a vehicle ignition switch.

In accordance with another preferred embodiment of the present invention the heating the liquid in the liquid heating chamber is provided by a plurality of heating elements located within the liquid heating chamber. In accordance with another preferred embodiment of the present invention electrical characteristics of individual ones of the plurality of heating elements are different from each other.

In accordance with another preferred embodiment of the present invention the liquid flows to the liquid heating chamber via a liquid inlet channel and enters the liquid heating chamber via at least two liquid inlet apertures formed in the liquid heating chamber including a first aperture located near a base of the liquid heating chamber and a second aperture located at an opposite side of the liquid heating chamber from the first aperture and near a middle of a height of the liquid heating chamber.

In accordance with another preferred embodiment of the present invention during operation of the vehicle pump supplying liquid to the liquid inflow

conduit a level of the liquid exceeds the height of the liquid heating chamber and fills a liquid heating chamber accommodating volume defined within the liquid heating chamber.

5 In accordance with still another preferred embodiment of the present invention the liquid drain aperture is located on a side of the liquid heating chamber just below the top thereof, which permits the draining of the liquid from the liquid heating chamber accommodating volume generally only down to the level of the liquid drain aperture when the vehicle pump is not in operation.

10 In accordance with still another preferred embodiment of the present invention the liquid from the liquid reservoir is supplied by the vehicle pump via the liquid inlet conduit via a liquid inlet pathway portion of a liquid connector assembly, which also defines a liquid outlet pathway portion.

15 In accordance with still another preferred embodiment of the present invention the heated liquid discharge method also includes controlling a differential pressure bypass pathway portion defined within a liquid connector assembly by a one-way valve, the one-way valve permits liquid flow from the liquid inlet pathway portion to the liquid outlet pathway portion when a pressure differential thereacross reaches a predetermined threshold, which indicates the existence of a blockage in a liquid path through the liquid heating chamber accommodating volume.

20 In accordance with yet another preferred embodiment of the present invention the heated liquid discharge method and also includes permitting supply of liquid under pressure to the liquid heating chamber accommodating volume but restricting backflow therethrough to a relatively slow rate.

25 In accordance with another preferred embodiment of the present invention the liquid passes through the liquid inlet channel, fills the liquid heating chamber accommodating volume and flows into the liquid heating chamber via the first and second apertures.

30 In accordance with still another preferred embodiment of the present invention the heated liquid discharge method also includes sensing a temperature of the liquid in the liquid heating chamber or of air overlying the liquid, depending on the liquid level of the liquid, by at least one temperature sensor.

In accordance with still another preferred embodiment of the present invention the heated liquid discharge method also includes operating the main assembly by a control circuitry, for operation of the main assembly, which is connected to the at least one temperature sensor.

5 In accordance with still another preferred embodiment of the present invention the heated liquid discharge method also includes shutting off electrical power to at least part of the main assembly in the event of overheating of the liquid heating chamber by an overheating cut-off fuse. Preferably, the fuse is formed with an undersurface of a resilient material and is retained in tight thermal engagement with the
10 underside of a base of the liquid heating element.

In accordance with yet another preferred embodiment of the present invention the heated liquid discharge method also includes providing both overheating and anti-freezing protection for the main assembly by the liquid drain aperture together with a leaky one-way valve.

15 In accordance with still another preferred embodiment of the present invention when the liquid is not being pumped into the liquid heating chamber, the liquid tends to drain slowly from the liquid heating chamber via the leaky one-way valve until a level of liquid in the liquid heating chamber reaches a level of the liquid drain aperture, at which point air, rather than liquid is drawn into the liquid outflow
20 conduit, effectively terminating drainage and retaining liquid inside the liquid heating chamber accommodating volume generally at the level of the liquid drain aperture.

In accordance with still another preferred embodiment of the present invention retention of liquid inside the liquid heating chamber at a level generally not lower than that of the liquid drain aperture ensures that the level of liquid in the liquid
25 heating chamber at least covers most of the heating elements located therein, ensuring rapid heating of the liquid and avoiding burning out of the heating elements due to lack of the liquid in the vicinity thereof and retention of the liquid inside the liquid heating chamber at a level no higher than that of the liquid drain aperture ensures that sufficient freezing expansion volume is provided so that when the vehicle is not being operated
30 and is in a freezing environment, freezing of the liquid therein does not cause cracking of the liquid heating chamber.

There is also provided in accordance with still another preferred embodiment of the present invention a heated liquid discharge method including supplying liquid from a liquid reservoir to a liquid heating chamber, heating the liquid in the liquid heating chamber, supplying heated liquid from the liquid heating chamber to at least one sprayer located at at least one location on a motor vehicle and draining of liquid to the liquid reservoir from the liquid heating chamber via a leaky one-way valve.

There is further provided in accordance with yet another preferred embodiment of the present invention a heated liquid discharge method including supplying liquid from a liquid reservoir to a liquid heating chamber, heating the liquid in the liquid heating chamber, supplying heated liquid from the liquid heating chamber to at least one sprayer located at at least one location on a motor vehicle, sensing a temperature of the heated liquid and separately sensing a temperature of the liquid heating chamber.

362. A heated liquid discharge method according to claim 361 and also including draining of the liquid to the liquid reservoir from the liquid heating chamber generally down to a predetermined level in the liquid heating chamber.

In accordance with another preferred embodiment of the present invention the supplying liquid from a liquid reservoir to a liquid heating chamber is via a liquid inflow conduit and the supplying heated liquid from the liquid heating chamber to the at least one sprayer located at at least one location on a motor vehicle is via a liquid outflow conduit.

BRIEF DESCRIPTION OF THE DRAWINGS AND APPENDIX

5 The present invention will be understood and appreciated from the following detailed description, taken in conjunction with the drawings and appendix in which:

Fig. 1 is a simplified partially pictorial and partially schematic illustration of a heated liquid discharge system constructed and operative in accordance with a preferred embodiment of the present invention installed in a motor vehicle;

10 Figs. 2A and 2B are, respectively, a simplified pictorial illustration and a simplified partially exploded view illustration of an assembly forming part of the system of Fig. 1;

Fig. 3 is a simplified exploded view illustration of part of the assembly shown in Figs. 2A and 2B;

15 Fig. 4 is a simplified exploded view illustration of a subassembly of the assembly shown in Figs. 2B and 3;

Fig. 5 is a simplified illustration of one of the elements of the subassembly shown in Fig. 4;

20 Fig. 6A, 6B and 6C are, respectively, a simplified illustration of another embodiment of some of the elements of the subassembly shown in Fig. 4, a sectional illustration taken along lines VIB - VIB in Fig. 6A and a partial sectional illustration taken along lines VIC - VIC in Fig. 6B;

25 Fig. 7A and 7B are, respectively, a simplified illustration of another embodiment of some of the elements of the subassembly shown in Fig. 4 and a sectional illustration taken along lines VIIB - VIIB in Fig. 7A;

Fig. 8 is a sectional illustration of the subassembly shown in Fig. 4 in two operative orientations;

30 Fig. 9A and 9B are, respectively, a simplified illustration of another embodiment of the elements shown in Figs. 7A & 7B and a sectional illustration taken along lines IXB - IXB in Fig. 9A;

Fig. 10 is a sectional illustration of another embodiment of the subassembly shown in Fig. 4 and which incorporates the embodiment of Figs. 9A & 9B, in two operative orientations;

5 Fig. 11 is a simplified timing diagram illustrating the operation of the system of Figs. 1 - 10;

Fig. 12 is a simplified partially pictorial and partially schematic illustration of a heated liquid discharge system constructed and operative in accordance with another preferred embodiment of the present invention installed in a motor vehicle;

10 Figs. 13A and 13B are, respectively, a simplified pictorial illustration and a simplified partially exploded view illustration of an assembly forming part of the system of Fig. 12;

Fig. 14 is a simplified exploded view illustration of part of the assembly shown in Figs. 13A and 13B;

15 Fig. 15 is a simplified timing diagram illustrating the operation of the system of Figs. 12 - 14;

Fig. 16 is a simplified partially pictorial and partially schematic illustration of a heated liquid discharge system constructed and operative in accordance with yet another preferred embodiment of the present invention installed in a motor vehicle;

20 Figs. 17A and 17B are, respectively, a simplified pictorial illustration and a simplified partially exploded view illustration of an assembly forming part of the system of Fig. 16;

Fig. 18 is a simplified exploded view illustration of part of the assembly shown in Figs. 17A and 17B;

25 Fig. 19 is a simplified illustration of a heated liquid discharge system constructed and operative in accordance with another preferred embodiment of the present invention mounted in a motor vehicle;

Fig. 20 is a simplified exploded view illustration of a portion of the heated liquid discharge system of Fig. 19;

30 Figs. 21A & 21B are simplified front view and back view pictorial illustrations corresponding to Fig. 20;

Fig. 22 is a simplified sectional illustration taken along lines XXII - XXII in Fig. 21A;

Fig. 23 is a simplified sectional illustration taken along lines XXIII - XXIII in Fig. 21A; and

5 Figs. 24A, 24B, 24C/1, 24C/2, 24C/3, 24D, 24E, 24F, 24G & 24H are together an electrical schematic illustration of the circuitry of the system of Figs. 19 - 23.

BRIEF DESCRIPTION OF THE APPENDIX

10 The Appendix includes a computer listing which form a heated liquid discharge system in accordance with a preferred software embodiment of the present invention when installed in accordance with installation instructions set forth hereinbelow.

15

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Reference is now made to Fig. 1, which is a simplified pictorial
5 illustration of a heated liquid discharge system constructed and operative in accordance
with a preferred embodiment of the present invention installed in a motor vehicle. As
seen in Fig. 1, an otherwise conventional motor vehicle 100 is seen to incorporate a
heated liquid discharge system 102 constructed and operative in accordance with a
preferred embodiment of the present invention. The heated liquid discharge system
10 preferably includes a vehicle washing liquid discharge assembly, a vehicle surface
washer assembly and a main assembly 104, which provides liquid heating as well as
electrical and liquid flow control functionalities. Main assembly 104 is electrically
connected via electrical cables 106 to a vehicle battery 108. It is appreciated that vehicle
washing liquid discharge assembly and vehicle surface washing assembly are preferably
15 a part of conventional motor vehicle 100.

A liquid inflow conduit 110 supplies washing liquid, such as water or
windshield cleaning liquid, from a vehicle liquid reservoir 112, having an associated
vehicle pump 114, to main assembly 104. Liquid inflow conduit 110 preferably includes
first and second branches 116 and 118. Branch 116 is coupled to an output of vehicle
20 pump 114, while branch 118 is coupled directly to the interior of reservoir 112. Thus
liquid may be obtained from reservoir 112 independently of whether vehicle pump 114
is in operation. A one-way valve 120 is preferably provided along branch 118, to
prevent liquid pumped by vehicle pump 114 from returning to the reservoir 112 via
branch 118.

25 A liquid outflow conduit 122 supplies washing liquid to one or more
sprayers 124, which may be located at one or more of the following vehicle surfaces
which requires washing: front vehicle windshield, back vehicle windshield, side vehicle
windows in general and especially in locations providing viewing access to vehicle
exterior mirrors, vehicle headlights, vehicle rear lights and vehicle exterior mirrors.

30 A vehicle operator actuation switch 130, typically located on the vehicle
dashboard, is electrically coupled to main assembly 104 by a control conductor 132.
Additional control conductors of any suitable number, here designated by reference

numeral 134, may couple the main assembly 104 to a vehicle computer (not shown) or to individual vehicle components, such as vehicle pump 114 or vehicle windshield wipers 135. One or more sensor conductors, here designated by reference numeral 136, may couple one or more external sensors 137, such as, for example, temperature sensors, vehicle speed sensors and humidity sensors, to the main assembly 104, either directly or via the vehicle computer.

In accordance with a preferred embodiment of the present invention, main assembly 104 may have associated therewith, typically in a subassembly 140, an auxiliary pump 142 in series along the liquid inflow conduit 110. Preferably, a one-way valve equipped bypass conduit 144 is provided in parallel to auxiliary pump 142 for permitting liquid ingress to main assembly 104 along liquid outflow conduit 122, even if auxiliary pump 142 fails to function. A one way valve 146 is arranged along bypass conduit 144 so as to prevent backflow of the output of auxiliary pump 142 in a direction away from main assembly 104.

Additionally, in accordance with a preferred embodiment of the present invention, a normally closed automatically operative valve, which is preferably a differential pressure responsive one-way valve 148 interconnects liquid outflow conduit 122 and liquid inflow conduit 110. Differential pressure responsive one-way valve 148 is opened when a pressure difference thereacross exceeds a predetermined threshold, typically 0.3 - 0.5 bar, so as to enable normal operation of vehicle sprayers 124 in response to conventional vehicle actuation of vehicle pump 114, notwithstanding malfunction of the main assembly 104.

Reference is now made to Figs. 2A and 2B, which are, respectively, a simplified pictorial illustration and a simplified partially exploded view illustration of the main assembly 104, forming part of the system of Fig. 1. As seen in Fig. 2A, the main assembly 104 preferably comprises a housing 200, including a base 202 and a cover 204, which are preferably mounted onto vehicle 100 (Fig. 1) by means of a mounting bracket 206.

As seen with greater particularity in Fig. 2B, the main assembly 104 comprises a liquid heating subassembly 208, which preferably includes a heat exchanger preferably in the form of a primary liquid heating volume portion and a secondary liquid heating volume portion. Primary liquid heating volume portion and

secondary liquid heating volume portion are preferably in the form of first and second conduit elements 210 and 212, which are preferably bolted together. First and second conduit elements 210 and 212 define a liquid heating enclosure which an interior thereof defines a liquid heating volume. Preferably, mounted onto liquid heating subassembly 208 there is provided an electrical control subassembly 214, typically comprising an electrical circuit board 216 and a plurality of heating elements, preferably three in number, designated by reference numerals 218, 220 and 222. An electrical connector 224, of conventional construction, provides electrical connections for control conductors 132 & 134 and sensor conductor 136, which are preferably connected to pads on circuit board 216. Cables 106, which provide connection to the vehicle battery 108 (Fig. 1), typically are coupled directly to the circuit board 216. A liquid temperature sensor 226, which senses the temperature of liquid as it leaves the liquid heating subassembly 208, is also coupled directly to the circuit board 216.

Electrical circuitry on electrical circuit board 216 provides, inter alia, control of the operation of liquid heating elements 218, 220 and 222, preferably by means of first and second relays 228 and 230 and a FET 232 (Field-Effect Transistor), respectively.

Communicating with first and second conduit elements 210 and 212 and with respective liquid outflow conduit 122 and liquid inflow conduit 110 are liquid outflow and liquid inflow connectors 240 and 242 respectively, which are seen to be interconnected by differential pressure responsive one-way valve 148. Auxiliary pump 142, bypass conduit 144 and one-way valve 146 are seen disposed in liquid inflow connector 242, it being appreciated that alternatively they may be located externally thereof.

Reference is now made to Fig. 3, which is a simplified exploded view illustration the of part of the assembly shown in Figs. 2A & 2B, to Fig. 4, which is a simplified exploded view illustration of the liquid heating subassembly 208 shown in Figs. 2B and 3 and to Fig. 5, which is a simplified illustration of one of the elements of the liquid heating subassembly 208 shown in Fig. 4.

As seen in Fig. 3, relays 228 and 230 and FET 232, as well as other electrical components (not shown), are typically mounted onto printed circuit board 216, which is, in turn, mounted onto first conduit element 210, preferably by means of

screws 234 and spacers 236. First conduit element 210 is preferably formed of a good conductor, such as aluminum, and has mounted thereon, in heat exchange relationship, the three heating elements 218, 220 and 222, preferably by means of screws 238.

Second conduit element 212 is preferably formed of a somewhat flexible
5 and resilient material, such as LEXAN®, and is preferably sealed as by screws 240 to 210 and to a heat-conductive displaceable element, which is preferably an intervening liquid impermeable diaphragm 250. The diaphragm may be an element separate from the second conduit element, as shown in Figs. 3, 4, 6A, 6B, 7A, 7B & 8, or alternatively may be integrally formed with the second conduit element, as illustrated in Figs. 9A, 9B
10 and 10 and described hereinbelow. Fig. 4 illustrates typical general configurations of conduits defined by first and second conduit elements 210 and 212 extending from a liquid ingress opening 252 in second conduit element 212, via a conduit 254 defined therein and via one or more apertures 256 formed in diaphragm 250, through a conduit 258 formed in first conduit element 210 and out through a heated liquid egress opening
15 260 formed in the first conduit element 210.

It is a particular feature of the embodiment of Fig. 5 that the conduit 258 defined by the first conduit element 210 includes a plurality of bifurcated conduit portions, including straight bifurcated portions 262 and curved bifurcated portions 264. The function of the bifurcated conduit portions 262 and 264 is to generate turbulence
20 and generally to help cause the flow of liquid therethrough to be such that generally all of the liquid flowing through the first conduit element 210 is in heat exchange contact with the walls of the conduit 258 to generally the same extent. For example, the provision of bifurcated conduit portions 262 and 264 prevents the occurrence of a situation where a portion of the liquid is generally in contact with the walls of the
25 conduit 258 while another portion thereof is generally not in contact with the walls of the conduit 258. The provision of bifurcated conduit portions is intended to enhance the speed and uniformity of liquid heating.

It is noted that conduit 258 may be configured to have side walls having a wavy configuration so as to further enhance the speed and uniformity of liquid
30 heating.

Reference is now made to Fig. 6A, 6B and 6C, which are, respectively, a simplified illustration of another embodiment of some of the elements of the

subassembly shown in Fig. 4, a sectional illustration taken along lines VIB - VIB in Fig. 6A and a sectional illustration taken along lines VIC - VIC in Fig. 6B. Similarly to that seen in Fig. 5, a conduit 265 defined by a first conduit element 266 includes a plurality of bifurcated conduit portions, including straight bifurcated portions 267 and curved bifurcated portions 268. The function of the bifurcated conduit portions 267 and 268 is to generate turbulence and generally to help cause the flow of liquid therethrough to be such that generally all of the liquid flowing through the first conduit element 266 is in heat exchange contact with the walls of the conduit 265 to generally the same extent.

In the embodiment of Figs. 6A, 6B & 6C, a top conduit wall 269 defined by first conduit element 266 and a bottom conduit wall 270, defined by a diaphragm 271, are configured to have a wavy, toothed or otherwise non-smooth configuration to further help cause the flow of liquid therethrough to be turbulent and such that generally all of the liquid flowing through the first conduit element 266 is in heat exchange contact with the walls of the conduit 265 to generally the same extent. Thus, a situation where a portion of the liquid is generally in contact with the walls of the conduit 265 while another portion thereof is generally not in contact with the walls of the conduit 265 is substantially obviated and the speed and uniformity of liquid heating is correspondingly enhanced.

It is noted that conduit 265 may be additionally configured to have side walls having a wavy configuration so as to further enhance the speed and uniformity of liquid heating.

Reference is now made to Fig. 7A, which is a simplified illustration of one embodiment of the second conduit element 212 shown in Figs. 2A - 5, to Fig. 7B, which is a sectional illustration taken along lines VIIB - VIIB in Fig. 7A, and to Fig. 8, which is a sectional illustration of Fig. 4 in two operative orientations. Figs. 7A and 7B illustrate a relatively resilient and flexible second conduit element 212 in association with resilient and flexible diaphragm 250. Liquid entering second conduit element 212 at liquid ingress opening 252 travels along a labyrinthine path defined by relatively rigid baffles 272 between a relatively flexible and resilient base 274, preferably integrally formed with baffles 272 and diaphragm 250. The liquid exits the second conduit element 212 via one or more apertures 256 formed in diaphragm 250.

As illustrated particularly in Fig. 8, the provision of second conduit element 212 provides freezing protection for the liquid heating subassembly 208, such that, when liquid freezes in the first conduit element 210, its expansion causes diaphragm 250 to bow outwardly from first conduit element 210 and to expand into the volume of second conduit element 212. Accordingly, expansion of the liquid in first conduit element 210 is accommodated without producing possible cracking or other damage to the first conduit element 210. Freezing of the liquid in the second conduit element 212 and displacement of the diaphragm 250 into the volume of the second conduit element is accommodated by outward bowing of the resilient base 274.

The structure of the liquid heating subassembly 208 as described hereinabove, including a first conduit element 210, having heating elements directed associated therewith, and a second conduit element 212, not having heating elements directly associated therewith, but nevertheless being in a relatively slow heat exchange relationship with the first conduit element 210, also has the advantage of providing a limited pre-heating functionality for liquid supplied from reservoir 112 (Fig. 1), first to the second conduit element 212 and therefrom to the first conduit element 210.

It is noted that second conduit element 212 may be provided with heating elements (not shown).

Reference is now made to Fig. 9A, which is a simplified illustration of an alternative to the embodiment of the second conduit element 212 shown in Figs. 2A – 5, to Fig. 9B, which is a sectional illustration taken along lines IXB - IXB in Fig. 9A, and to Fig. 10, which is a sectional illustration of another embodiment of the subassembly shown in Fig. 4 and which incorporates the embodiment of Figs. 9A & 9B, in two operative orientations. Figs. 9A and 9B illustrate a relatively resilient and flexible second conduit element 282, preferably integrally formed with a resilient and flexible diaphragm 284. Liquid entering second conduit element 282 at a liquid ingress opening 286 travels along a labyrinthine path defined by relatively rigid baffles 288 between a relatively flexible and resilient base 290, preferably bonded to baffles 288 and diaphragm 284. The liquid exits the second conduit element 282 via one or more apertures 292 formed in diaphragm 284.

As illustrated particularly in Fig. 10, the provision of second conduit element 282 provides freezing protection for the liquid heating subassembly 208, in

that, when liquid freezes in the first conduit element 210, its expansion causes diaphragm 284 to bow outwardly from first conduit element 210 and to expand into the volume of second conduit element 282. Accordingly, expansion of the liquid in first conduit element 210 is accommodated without producing possible cracking or other damage to the first conduit element 210. Freezing of the liquid in the second conduit element 282 and displacement of the diaphragm 284 into the volume of the second conduit element 282 preferably is accommodated by outward bowing of the resilient base 290.

The structure of the liquid heating subassembly 208 as described hereinabove, including a first conduit element 210, having heating elements directed associated therewith, and a second conduit element 282, not having heating elements directly associated therewith, but nevertheless being in a relatively slow heat exchange relationship with the first conduit element 210, also has the advantage of providing a limited pre-heating functionality for liquid supplied from reservoir 112 (Fig. 1), first to the second conduit element 282 and therefrom to the first conduit element 210.

Reference is now made to Fig. 11, which is a simplified timing diagram illustrating the operation of the system of Figs. 1 - 10. As seen in Fig. 11, system actuation is preferably initiated by a user, such as the driver of motor vehicle 100 (Fig. 1) pressing an operator actuation switch 130, typically located on the vehicle dashboard, as seen in Fig. 1. It is noted, however, that preferably, at all times that the vehicle is running, even prior to operator actuation of switch 130, FET 232 (Figs. 2B & 3) operates heating element 222 in a continuous manner, so as to maintain liquid within the liquid heating subassembly 208 at a temperature of at least 65 degrees Centigrade, for example. If the ambient temperature at the liquid heating subassembly 208 exceeds the liquid maintenance temperature, FET 232 is preferably caused to terminate or curtail operation of heating element 222 so as to avoid overheating.

Upon user actuation of switch 130, relays 228 and 230 are preferably operated to operate respective heating element 218 and 220, which provide immediate boosted heating of the liquid within first conduit element 210. When sensor 226 senses that the temperature of the liquid within the first conduit element 210 has reached a first predetermined elevated temperature, typically 85 degrees Centigrade, one or both of pumps 114 and 142 are operated to pump heated liquid out from the first conduit

element 210 and to cause the heated liquid to be sprayed by sprayers 124. The operation of one or both of pumps 114 and 142 causes unheated or less heated liquid from reservoir 112 to be supplied initially to second conduit element 212 and thereafter to first conduit element 210 for heating thereof.

5 In the short term, the aforesaid operation of one or both of pumps 114 and 142 causes a drop in the temperature of the liquid as measured by sensor 226. When the temperature of the liquid, as sensed by sensor 226, drops below a predetermined threshold temperature, typically 55 degrees Centigrade, operation of the pumps 114 and 142 is terminated. When further heating again raises the temperature of the liquid,
10 sensed by sensor 226, to a second predetermined elevated temperature, preferably less than the first predetermined threshold temperature, typically 65 degrees, pump operation is resumed. This intermittent operation of one or both pumps 114 and 142 continues for a predetermined number of cycles or for a predetermined time duration following user actuation of switch 130, typically four cycles.

15 It is noted that the electrical power requirements of the system increase substantially upon user actuation of the switch 130 and remain generally constant until completion of the last cycle following such actuation.

It is additionally noted that the initial spray cycle, designated by reference numeral 300, is typically longer than the subsequent spray cycles, designated
20 by reference numeral 302, for each user actuation of switch 130. It is further noted that when the user actuation of switch 130 takes place immediately after initiation of operation of FET 232 and heating element 222, such as within 1 - 2 minutes following initial operation of the motor vehicle 100, the initial spray cycle 300, is shorter than the initial spray cycle 304 in a case when the user actuation of switch 130 takes place
25 significantly later than initial operation of the motor vehicle 100.

It is additionally noted that the time delay between operator actuation of switch 130 and initiation of the initial spray cycle 300 is significantly longer than the
time delay between operation actuator of switch 130 and initial spray cycle 304, which is nearly instantaneous. This feature is due partially to the particular structure of the
30 liquid heating subassembly 208 as described hereinabove, including a first conduit element 210, having heating elements directed associated therewith, and a second conduit element, designated by reference numeral 212 in Figs. 2A - 8 and 282 in Figs.

9A - 10, not having heating elements directly associated therewith, but nevertheless being in a relatively slow heat exchange relationship with the first conduit element 210. Liquid heating subassembly 208 also has the advantage of providing a limited pre-heating functionality for liquid supplied from reservoir 112, first to the second conduit element, designated by reference numeral 212 in Figs. 2A - 8 and 282 in Figs. 9A - 10, and therefrom to the first conduit element 210. The provision of the second conduit element, designated by reference numeral 212 in Figs. 2A - 8 and 282 in Figs. 9A - 10, does not significantly adversely affect the speed of providing an initial spray cycle 300 of heated liquid immediately after initial vehicle operation, but does significantly positively affect the speed of providing an initial spray cycle 304 of heated liquid a significant time after initial vehicle operation.

This beneficial functionality results from the fact that diaphragm acts as a good thermal insulator in the short term and prevents significant heat loss from the first conduit element 210 during quick heating of the liquid therein, but allows heat to pass therethrough in the long term, for heating of liquid in both the first and the second conduit elements to the second predetermined temperature even prior to operator actuation of switch 130.

Accordingly, once the vehicle has been running for a significant time, operator actuation of switch 130 produces a nearly instantaneous initial spray cycle 304 of heated liquid and furthermore the quantity of heated liquid which is sprayed is significantly greater, typically up to a factor of 3, than the quantity of heated liquid which is available for spraying immediately following initial vehicle operation.

Reference is now made to Fig. 12, which is a simplified pictorial illustration of a heated liquid discharge system constructed and operative in accordance with a preferred embodiment of the present invention installed in a motor vehicle. As seen in Fig. 12, an otherwise conventional motor vehicle 1100 is seen to incorporate a heated liquid discharge system 1102 constructed and operative in accordance with a preferred embodiment of the present invention. The heated liquid discharge system preferably includes a main assembly 1104, which provides liquid heating as well as electrical and liquid flow control functionalities. Main assembly 1104 is electrically connected via electrical cables 1106 to a vehicle battery 1108.

A liquid inflow conduit 1110 supplies washing liquid, such as water or cleaning liquid, from a vehicle liquid reservoir 1112, having an associated vehicle pump 1114, to main assembly 1104. Liquid inflow conduit 1110 preferably includes first and second branches 1116 and 1118. Branch 1116 is coupled to an output of vehicle pump 1114, while branch 1118 is coupled directly to the interior of reservoir 1112. Thus liquid may be obtained from reservoir 1112 independently of whether vehicle pump 1114 is in operation. A one-way valve 1120 is preferably provided along branch 1118, to prevent liquid pumped by vehicle pump 1114 from returning to the reservoir 1112 via branch 1118.

A liquid outflow conduit 1122 supplies washing liquid to one or more vehicle radar antenna sprayers 1124 operative to discharge liquid onto an external surface of a vehicle radar antenna 1126, typically located between vehicle headlights.

A vehicle radar actuation switch 1130, typically located on the vehicle dashboard, is electrically coupled to main assembly 1104 by a control conductor 1132. Additional control conductors of any suitable number, here designated by reference numeral 1134, may couple the main assembly 1104 to a vehicle computer (not shown) or to individual vehicle components, such as vehicle pump 1114 or a vehicle radar unit 1135. One or more sensor conductors, here designated by reference numeral 1136, may couple one or more external sensors 1137, such as, for example, temperature sensors, vehicle speed sensors and humidity sensors to the main assembly 1104, either directly or via the vehicle computer. A radar antenna spray control conductor 1138 couples the main assembly 1104 to an automatic gain control circuit (AGC) forming part of the vehicle radar unit 1135.

In accordance with a preferred embodiment of the present invention, main assembly 1104 may include, typically in a subassembly 1140, an auxiliary pump 1142 in series along the liquid inflow conduit 1110. Preferably, a one-way valve equipped bypass conduit 1144 is provided in parallel to auxiliary pump 1142 for permitting liquid ingress to main assembly 1104 along liquid inflow conduit 1110, even if auxiliary pump 1142 fails to function. A one way valve 1146 is arranged along bypass conduit 1144 so as to prevent backflow of the output of auxiliary pump 1142 in a direction away from main assembly 1104.

Additionally, in accordance with a preferred embodiment of the present invention, a differential pressure responsive one-way valve 1148 interconnects liquid outflow conduit 1122 and liquid inflow conduit 1110. Differential pressure responsive one-way valve 1148 is opened when a pressure difference thereacross exceeds a predetermined threshold, typically, 0.3 - 0.5 bar, so as to enable normal operation of vehicle radar antenna sprayers 1124, notwithstanding malfunction of the main assembly 1104.

Reference is now made to Figs. 13A and 13B, which are, respectively, a simplified pictorial illustration and a simplified partially exploded view illustration of the main assembly 1104, forming part of the system of Fig. 12. As seen in Fig. 13A, the main assembly preferably comprises a housing 1200, including a base 1202 and a cover 1204, which are preferably mounted onto vehicle 1100 (Fig. 12) by means of a mounting bracket 1206.

As seen with greater particularity in Fig. 13B, the main assembly 1104 comprises a liquid heating subassembly 1208, which preferably includes first and second conduit elements 1210 and 1212, which are preferably bolted together. Preferably, mounted onto liquid heating subassembly 1208 there is provided an electrical control subassembly 1214, typically comprising an electrical circuit board 1216 and a heating element 1222. An electrical connector 1224, of conventional construction, provides electrical connections for control conductors 1132, 1134 and 1138 and sensor conductor 1136, which are preferably connected to pads on circuit board 1216. Cables 1106, which provide connection to the vehicle battery 1108 (Fig. 12), typically are coupled directly to the circuit board 1216. A liquid temperature sensor 1226, which senses the temperature of liquid as it leaves the liquid heating subassembly 1208, is also coupled directly to the circuit board 1216.

Electrical circuitry on electrical circuit board 1216 provides, inter alia, control of the operation of liquid heating element 1222, preferably by means of a FET 1232.

Communicating with first and second conduit elements 1210 and 1212 and with respective liquid outflow conduit 1122 and liquid inflow conduit 1110 are liquid outflow and liquid inflow connectors 1240 and 1242 respectively, which are seen to be interconnected by differential pressure responsive one-way valve 1148. Auxiliary

pump 1142, bypass conduit 1144 and one-way valve 1146 are seen disposed in liquid inflow connector 1242, it being appreciated that alternatively they may be located externally thereof.

Reference is now made to Fig. 14, which is a simplified exploded view illustration of part of the assembly shown in Figs. 13A & 13B. As seen in Fig. 14, FET 1232 as well as other electrical components (not shown) are typically mounted onto printed circuit board 1216, which is, in turn, mounted onto first conduit element 1210, preferably by means of screws 1234 and spacers 1236. First conduit element 1210 is preferably formed of a good conductor, such as aluminum and has mounted thereon, in heat exchange relationship, heating element 1222 preferably by means of screws 1238.

Second conduit element 1212 is preferably formed of a somewhat flexible and resilient material, such as LEXAN®, and is preferably sealed as by screws 1240 to first conduit element 1210 and to an intervening liquid impermeable diaphragm 1250. Conduits defined by first and second conduit elements 1210 and 1212 extend from a liquid ingress opening 1252 in second conduit element 1212, via a conduit 1254 defined therein and via one or more apertures 1256 formed in diaphragm 1250, through a conduit (not shown) formed in first conduit element 1210 and out through a heated liquid egress opening 1260 formed in the first conduit element 1210.

It is appreciated that the liquid flow in liquid heating subassembly 1208 is identical to the liquid flow described hereinabove in Figs. 5 – 10.

Reference is now made to Fig. 15, which is a simplified timing diagram illustrating the operation of the system of Figs. 12 - 14. As seen in Fig. 15, liquid discharge from vehicle radar antenna sprayers 1124 on vehicle radar antenna 1126 is preferably automatically controlled. When the vehicle is running and when vehicle radar actuation switch 1130 is in an operative orientation (Fig. 12), accumulation of deposits on the vehicle radar antenna 1126, such as slush, mud, rain, and snow cause the AGC to activate the heated liquid discharge system (Figs. 12 – 14) as described hereinbelow.

Preferably, at all times that the vehicle is running, even when the vehicle radar is not activated, FET 1232 (Figs. 13B & 14) operates heating element 1222 in a continuous manner, so as to maintain liquid within the liquid heating subassembly 1208 preferably at a temperature of at least 65 degrees Centigrade, for example. If the ambient temperature at the liquid heating subassembly 1208 exceeds the liquid

maintenance temperature, FET 1232 is preferably caused to terminate or curtail operation of heating element 1222 so as to avoid overheating.

When the AGC provides a signal of at least a predetermined threshold value, here designated by reference numeral 1300, due to accumulations on the vehicle radar antenna 1126, one or both of pumps 1114 and 1142 are operated to pump heated liquid out from the first conduit element 1210 and to cause the heated liquid to be sprayed by vehicle radar antenna sprayers 1124. The operation of one or both of pumps 1114 and 1142 causes unheated or less heated liquid from reservoir 1112 to be supplied initially to second conduit element 1212 and thereafter to first conduit element 1210 for heating thereof. When the value of the AGC output signal drops below another predetermined threshold value, designated by reference numeral 1302, which is typically below threshold value 1300, operation of the pumps 1114 and 1142 is terminated.

In the short term, the operation of one or both of pumps 1114 and 1142 causes a drop in the temperature of the liquid as measured by sensor 1226. When the temperature of the liquid, as sensed by sensor 1226, drops below a predetermined threshold temperature, typically 55 degrees Centigrade, operation of the pumps 1114 and 1142 is terminated. When further heating again raises the temperature of the liquid, sensed by sensor 1226, to a predetermined elevated temperature, typically 65 degrees, pump operation is resumed. This intermittent operation of one or both pumps 1114 and 1142 continues typically until the value of the AGC signal drops below predetermined threshold value 1302.

It is noted that the electrical power requirements of the system increase substantially with increased accumulation and corresponding AGC controlled actuation of the heated liquid discharge system and remain generally constant until completion of the last cycle following such actuation.

It is additionally noted that the initial spray cycle, designated by reference numeral 1310, is typically longer than the subsequent spray cycles, designated by reference numeral 1312, for AGC controlled actuation of the heated liquid discharge system. It is further noted that when AGC controlled actuation of the heated liquid discharge system takes place immediately after initiation of operation of FET 1232 and heating element 1222, such as within 1 - 2 minutes following initial operation of the

motor vehicle 1100, the initial spray cycle 1310, is shorter than the initial spray cycle 1314 in a case when AGC controlled actuation of the heated liquid discharge system takes place significantly later than initial operation of the motor vehicle 1100.

It is further noted that the time delay between AGC controlled actuation of the heated liquid discharge system and initiation of the initial spray cycle 1310 is significantly longer than the time delay between AGC controlled actuation of the heated liquid discharge system and initial spray cycle 1314, which is nearly instantaneous. This feature is due partially to the particular structure of the liquid heating subassembly 1208 as described hereinabove, including a first conduit element 1210, having a heating element 1222 directed associated therewith, and a second conduit element 1212 not having a heating element directly associated therewith, but nevertheless being in a relatively slow heat exchange relationship with the first conduit element 1210.

Liquid heating subassembly 1208 also has the advantage of providing a limited pre-heating functionality for liquid supplied from reservoir 1112, first to the second conduit element 1212 and therefrom to the first conduit element 1210. The provision of the second conduit element 1212 does not significantly adversely affect the speed of providing an initial spray cycle 1310 of heated liquid immediately after initial vehicle operation, but does significantly positively affect the speed of providing an initial spray cycle 1314 of heated liquid a significant time after initial vehicle operation.

This beneficial functionality results from the fact that diaphragm 1250 acts as a good thermal insulator in the short term and prevents significant heat loss from the first conduit element 1210 during quick heating of the liquid therein, but allows heat to pass therethrough in the long term, for heating of liquid in both the first and the second conduit elements to the predetermined elevated temperature even prior to AGC controlled actuation of the heated liquid discharge system.

Accordingly, once the vehicle has been running for a significant time, operator actuation of vehicle radar actuation switch 1130 produces a nearly instantaneous initial spray cycle 1304 of heated liquid and furthermore the quantity of heated liquid which is sprayed is significantly greater, typically up to a factor of 3, than the quantity of heated liquid which is available for spraying immediately following initial vehicle operation.

Reference is now made to Fig. 16, which is a simplified pictorial illustration of a heated liquid discharge system constructed and operative in accordance with a preferred embodiment of the present invention installed in a motor vehicle. As seen in Fig. 16, an otherwise conventional motor vehicle 2100 is seen to incorporate a heated liquid discharge system 2102 constructed and operative in accordance with a preferred embodiment of the present invention. The heated liquid discharge system preferably includes a main assembly 2104, which provides liquid heating as well as electrical and liquid flow control functionalities. Main assembly 2104 is electrically connected via electrical cables 2106 to a vehicle battery 2108.

A liquid inflow conduit 2110 supplies washing liquid, such as water or cleaning liquid, from a vehicle liquid reservoir 2112, having an associated vehicle pump 2114, to main assembly 2104. A vehicle computer 2115 governs the operation of the pump 2114 via a control conductor 2116. Liquid inflow conduit 2110 preferably includes first and second branches 2117 and 2118. Branch 2117 is coupled to an output of vehicle pump 2114, while branch 2118 is coupled directly to the interior of reservoir 2112. Thus liquid may be obtained from reservoir 2112 independently of whether vehicle pump 2114 is in operation. A one-way valve 2120 is preferably provided along branch 2118, to prevent liquid pumped by vehicle pump 2114 from returning to the reservoir 2112 via branch 2118.

A liquid outflow conduit 2122 supplies washing liquid to one or more windshield sprayers 2124 operative to discharge liquid onto a vehicle windshield 2126.

In accordance with a preferred embodiment of the present invention, main assembly 2104 may have associated therewith, typically in a subassembly 2130, an auxiliary pump 2132 in series along the liquid inflow conduit 2110. Preferably, a one-way valve equipped bypass conduit 2134 is provided in parallel to auxiliary pump 2132 for permitting liquid ingress to main assembly 2104 along liquid inflow conduit 2110, even if auxiliary pump 2132 fails to function. A one way valve 2136 is arranged along bypass conduit 2134 so as to prevent backflow of the output of auxiliary pump 2132 in a direction away from main assembly 2104.

Additionally, in accordance with a preferred embodiment of the present invention, a differential pressure responsive one-way valve 2138 interconnects liquid outflow conduit 2122 and liquid inflow conduit 2110. Differential pressure responsive

one-way valve 2138 is opened when a pressure difference thereacross exceeds a predetermined threshold, typically, 0.3 - 0.5 bar, so as to enable normal operation of windshield sprayers 2124 and vehicle radar antenna sprayers 2140 in response to conventional vehicle actuation of vehicle pump 2114, notwithstanding malfunction of the main assembly 2104.

A user operated vehicle unheated liquid windshield discharge actuator 2142, typically located in the vicinity of the vehicle steering wheel, is electrically coupled to vehicle computer 2115 by a control conductor 2150. In a first mode of operation, wherein the heated liquid discharge system 2102 is not user actuated for spraying heated liquid onto the radar antenna, operation of user operated vehicle unheated liquid windshield discharge actuator 2142 by a user preferably causes an electrical signal to be transmitted via control conductor 2150 to vehicle computer 2115, which causes activation, by means of control conductor 2116, of vehicle pump 2114. Liquid outflow conduit 2122 supplies liquid from pump 2114 and/or pump 2132 to windshield sprayers 2124 via a conduit branch 2152, a normally-open valve 2154 and a conduit branch 2156. Liquid supplied by vehicle pump 2114 and/or pump 2132 via outflow conduit 2122 is also supplied to windshield sprayers 2124 via a bidirectional valve 2158, a conduit branch 2160 and conduit branch 2156. Bidirectional valve 2158 is normally open for liquid flow from conduit 2122 to conduit branch 2160 and is electrically coupled to main assembly 2104 via control conductor 2161. A one way valve 2162 preferably is provided along conduit branch 2160, so as to prevent flow of liquid away from windshield sprayers 2124.

A user operated heated liquid windshield discharge actuator 2170, typically located on the vehicle dashboard, is electrically coupled to main assembly 2104 via a control conductor 2172. Actuation by a user of user operated heated liquid windshield discharge actuator 2170 causes heated liquid from main assembly 2104 to be supplied via conduit branch 2152, normally-open valve 2154 and conduit branch 2156 as well as via bidirectional valve 2158 to windshield sprayers 2124 via conduit branches 2160 and 2156.

Heated liquid from main assembly 2104 is also supplied to one or more vehicle radar antenna sprayers 2140 in response to an AGC actuation signal received by vehicle computer 2115 from a vehicle radar unit 2173. In response to receipt of the

AGC actuation signal, the vehicle computer 2115 causes main assembly 2104 to provide a direction switch electrical signal along a control conductor 2174 to bidirectional valve 2158, causing it to direct liquid from conduit 2122 along a conduit branch 2176, via a flow restrictor 2178 arranged in series therewith to vehicle radar antenna sprayers 2140. Additionally, in response to receipt of the AGC actuation signal, the vehicle computer 2115 causes main assembly 2104 to provide a valve closing signal to normally open valve 2154 along a control conductor 2182. Alternatively, the AGC actuation signal is supplied directly to the main assembly 2104.

It is appreciated that in a preferred embodiment of the present invention, main assembly 2104 supplies heated liquid to vehicle radar antenna sprayers 2140 only when windshield sprayers 2124 are not

It is a particular feature of the present invention that if during radar antenna spraying operation of the system in response to the AGC actuation signal, either of actuators 2142 and 2170 are actuated by a user, liquid, heated or unheated as the case may be, is immediately directed to windshield sprayers 2124. In the case of actuation of user operated unheated fluid windshield discharge actuator 2142, this is preferably effected by opening of a relay 2184, which is connected in series along control conductor 2182, in response to a relay open signal supplied by vehicle computer 2115 along control conductor 2185, for preventing the valve closing signal from reaching normally open valve 2154, thereby retaining normally open valve 2154 in an open orientation and permitting liquid flow therethrough from conduit 2122 via conduit branch 2152, normally open valve 2154 and conduit branch 2156 to windshield sprayers 2124. In the case of actuation of user operated vehicle heated fluid windshield discharge actuator 2170, this is preferably effected by main assembly 2104 not providing a valve closing signal to normally open valve 2154 along control conductor 2182. Heated liquid from main assembly 2104 is thus supplied to windshield sprayers 2124 as described hereinabove. In both cases the operation of flow restrictor 2178 ensures that liquid reaches windshield sprayers 2124.

A vehicle radar actuation switch 2190, typically located on the vehicle dashboard, is electrically coupled to main assembly 2104 by a control conductor 2192. One or more sensor conductors, here designated by reference numeral 2194, may couple one or more external sensors 2196, such as, for example, temperature sensors, vehicle

speed sensors and humidity sensors to the main assembly 2104, either directly or via the vehicle computer 2115.

Reference is now made to Figs. 17A and 17B, which are, respectively, a simplified pictorial illustration and a simplified partially exploded view illustration of the main assembly 2104, forming part of the system of Fig. 16. As seen in Fig. 17A, the main assembly 2104 preferably comprises a housing 2200, including a base 2202 and a cover 2204, which are preferably mounted onto vehicle 2100 (Fig. 16) by means of a mounting bracket 2206.

As seen with greater particularity in Fig. 17B, the main assembly 2104 comprises a liquid heating subassembly 2208, which preferably includes first and second conduit elements 2210 and 2212, which are preferably bolted together. Preferably, mounted onto liquid heating subassembly 2208 there is provided an electrical control subassembly 2214, typically comprising an electrical circuit board 2216 and heating elements 2218, 2220 and 2222. An electrical connector 2224, of conventional construction, provides electrical connections for control conductors 2182, 2161, 2172, and 2194 and sensor conductors 2192, which are preferably connected to pads on circuit board 2216. Cables 2106, which provide connection to the vehicle battery 2108 (Fig. 16), typically are coupled directly to the circuit board 2216. A liquid temperature sensor 2226, which senses the temperature of liquid as it leaves the liquid heating subassembly 2208, is also coupled directly to the circuit board 2216.

Electrical circuitry on electrical circuit board 2216 provides, inter alia, control of the operation of liquid heating elements 2218, 2220 and 2222, preferably by means of first and second relays 2228 and 2230 and a FET 2232, respectively.

Communicating with first and second conduit elements 2210 and 2212 and with respective liquid outflow conduit 2122 and liquid inflow conduit 2110 are liquid outflow and liquid inflow connectors 2240 and 2242 respectively, which are seen to be interconnected by differential valve 2138. Auxiliary pump 2132, bypass conduit 2134 and one-way valve 2136 are seen disposed in liquid inflow connector 2242, it being appreciated that alternatively they may be located externally thereof.

Reference is now made to Fig. 18, which is a simplified exploded view illustration of part of the assembly shown in Figs. 17A & 17B. As seen in Fig. 18, relays 2228 and 2230 and FET 2232 as well as other electrical components (not shown) are

typically mounted onto printed circuit board 2216, which is, in turn, mounted onto first conduit element 2210, preferably by means of screws 2234 and spacers 2236. First conduit element 2210 is preferably formed of a good conductor, such as aluminum and has mounted thereon, in heat exchange relationship, the three heating elements 2218, 2220 and 2222 preferably by means of screws 2238.

Second conduit element 2212 is preferably formed of a somewhat flexible and resilient material, such as LEXAN®, and is preferably sealed as by screws 2240 to first conduit element 2210 and to an intervening liquid impermeable diaphragm 2250. Conduits defined by first and second conduit elements 2210 and 2212 extend from a liquid ingress opening 2252 in second conduit element 2212, via a conduit 2254 defined therein and via one or more apertures 2256 formed in diaphragm 2250, through a conduit (not shown)-formed-in first conduit element 2210 and-out-through a heated liquid egress opening 2260 formed in the first conduit element 2210.

It is appreciated that the liquid flow in liquid heating subassembly 2208 is identical to the liquid flow described hereinabove in Figs. 5 – 10.

Reference is now made to Fig. 19, which is a simplified illustration of a heated liquid discharge system constructed and operative in accordance with another preferred embodiment of the present invention mounted in a motor vehicle. As seen in Fig. 19, an otherwise conventional motor vehicle 3100 is seen to incorporate a heated liquid discharge system 3102 constructed and operative in accordance with a preferred embodiment of the present invention. The heated liquid discharge system preferably includes a main assembly 3104, which provides liquid heating as well as electrical and liquid flow control functionalities. Main assembly 3104 is electrically connected via electrical cables 3106 and 3107 to a vehicle battery 3108.

A liquid inflow conduit 3110 supplies liquid, such as water or windshield cleaning liquid, from a vehicle liquid reservoir 3112, having an associated vehicle pump 3114, to main assembly 3104.

A liquid outflow conduit 3122 supplies liquid to one or more sprayers 3124, which may be located at one or more of the following vehicle locations: front vehicle windshield, back vehicle windshield, side vehicle windows in general and especially in locations providing viewing access to vehicle exterior mirrors, vehicle headlights, vehicle rear lights and vehicle exterior mirrors.

A vehicle operator actuation switch 3130, typically located on the vehicle dashboard, is electrically coupled to main assembly 3104 by a control conductor pair 3132. A pair of vehicle computer interface conductors 3134 and 3136 interconnect the main assembly 3104 to the existing vehicle computer 3138. An ignition interface conductor 3140 interconnects the main assembly 3104 to the existing vehicle ignition switch.

Reference is now made additionally to Figs. 20, 21A, 21B, 22 and 23, which illustrate details of the structure and mounting of main assembly 3104. The main assembly 3104 is preferably mounted onto the vehicle chassis by a suitable mounting bracket, such as mounting bracket 3142. Mounting bracket 3142 preferably comprises suitably apertured chassis mounting portions 3144 and 3146 and a slide and snap fit main assembly support portion 3148 having slidable engagement indents 3150 and a snap fit engagement protrusion 3152 having indents 3154. The snap fit engagement protrusion 3152 may be injection molded of plastic directly onto the remainder of mounting bracket 3142.

Main assembly 3104 comprises a liquid heating chamber communicating with liquid inflow conduit 3122 and liquid outflow conduit 3110 a principal housing portion 3160, which is configured for removable snap-fit engagement therewith by a cover housing portion 3162. As seen particularly in Fig. 21B, the back surface of principal housing portion 3160 is formed with suitably undercut retaining protrusions 3164 which slidably engage corresponding corners 3166 of support portion 3148 underlying indents 3150. As seen particularly in Fig. 21A, the top surface of principal housing portion 3160 is formed with a pair of engagement guides 3168 and inclined snap fit engagement protrusions 3170 which engage indents 3154 in snap fit engagement protrusion 3152.

Principal housing portion 3160 defines a generally circular cylindrical liquid heating chamber accommodating volume 3180, in a major portion of which is disposed a liquid heating assembly 3182. Liquid heating assembly 3182 preferably comprises a circular cylindrical outer sleeve 3184 having a base 3186, which defines a sealing ring retaining socket 3188, arranged to retain an insulative liquid sealing ring 3190.

A plurality of folded over heating elements, preferably three in number, designated by reference numerals 3192, 3194 and 3196, are located within sleeve 3184. Preferably heating elements 3192 and 3194 partially overlie heating element 3196, as seen in Fig. 23. Each of the folded over heating elements 3192, 3194 and 3196 preferably includes a resistance heating element 3198, located within a heating element conductive sleeve 3200 and electrically insulated therefrom by an insulator 3202, such as a ceramic material.

The resistance heating element 3198 is preferably coupled at one end thereof to an electrical connection terminal 3204 extending outwardly of base 3186 and is coupled at an opposite end thereof to conductive sleeve 3200. The conductive sleeves 3200 of each of the folded over heating elements 3192, 3194 and 3196 are electrically coupled to ground via base 3186 and an electrical connector 3206. It is appreciated that the electrical characteristics of the resistance heating elements 3198 of the various folded over heating elements 3192, 3194 and 3196 are typically different from each other.

Principal housing portion 3160 also defines a liquid inlet channel 3210 and a heated liquid outlet channel 3212, both communicating with liquid heating chamber accommodating volume 3180, as well as a heated liquid temperature sensor mounting aperture 3214, also communicating with liquid heating chamber accommodating volume 3180. Liquid supplied to liquid heating chamber accommodating volume 3180 via liquid inlet channel 3210 preferably enters a liquid heating chamber 3216, defined by the interior of sleeve 3184, via at least two liquid inlet apertures formed in sleeve 3184, preferably a first aperture 3218 located near the base 3186 and a second aperture 3220, preferably located at an opposite side of sleeve 3184 and near the middle of the height of the sleeve 3184.

Normally, during operation of pump 3114 (Fig. 19), the level of the liquid exceeds the height of the liquid heating chamber and fills the liquid heating chamber accommodating volume 3180. A liquid drain aperture 3228 is located on a side of sleeve 3184 just below the top thereof, which permits draining of liquid from volume 3180 only down to the level of liquid drain aperture 3228, when the vehicle pump 3114 (Fig. 19) is not in operation. The importance of liquid drain aperture 3228 and its

placement in the liquid heating chamber accommodating volume 3180 will be described hereinbelow.

Liquid from reservoir 3112 (Fig. 19) is supplied by vehicle pump 3114 via liquid inlet conduit 3110 via a liquid inlet pathway portion 3250 of a liquid connector assembly 3252, which also defines a liquid outlet pathway portion 3254. Liquid connector assembly 3252 preferably comprises an injection molded element which also defines a differential pressure bypass pathway portion 3256, which is controlled by a spring loaded one-way valve 3258 and which permits liquid flow from liquid inlet pathway portion 3250 to liquid outlet pathway portion 3254 when the pressure differential thereacross reaches a predetermined threshold, typically 0.3 - 0.5 bar, which indicates the existence of a blockage in the liquid path through valve 3260 and the liquid heating chamber accommodating volume 3180.

Liquid inlet pathway portion 3250 preferably comprises a leaky one way valve 3260, preferably having a channel 3262 formed in a valve seat 3264 thereof, as shown in detail in Fig. 22. Valve 3260 preferably permits supply of liquid under pressure to the liquid heating chamber accommodating volume 3180 but restricts backflow therethrough to a relatively slow rate. The liquid passes through liquid inlet channel 3210 and fills the liquid heating chamber accommodating volume 3180. The liquid flows into liquid heating chamber 3216 via first and second apertures 3218 and 3220 in sleeve 3184.

The liquid is heated in liquid heating chamber 3216 and the temperature of the liquid or the air overlying the liquid, depending on the liquid level, is sensed by a temperature sensor 3270, commercially available from EPCOS AG. Corporate Communications of Munich, Germany, identified by Catalog No. G560/50K/F2 and located in heated liquid temperature sensor mounting aperture 3214. Temperature sensor 3270 preferably is mounted onto a printed circuit board 3272 which is mounted within principal housing portion 3160 and located outside of liquid heating chamber accommodating volume 3180.

Mounted on printed circuit board 3272 is control circuitry for operation of the main assembly 3104 which is connected inter alia to temperature sensor 3270 and via a connector 3274 and a wire harness 3276 including a connector 3278 to control conductor pair 3132, vehicle computer interface conductors 3134 and 3136 and ignition

interface conductor 3140 (Fig. 19). Electrical cables 3106 and 3107 connect the vehicle battery 3108 (Fig. 19) to connection terminals 3280 of a plurality of relays 3282, which supply electrical power to electrical connection terminals 3204 of heating elements 3192, 3194 and 3196 via electrical connectors 3284. Relays 3282 are commercially available from TYH Enterprise Limited of Tsuen Wan, N.T., Hong Kong. Electrical connector 3206 provides a direct ground connection between base 3186 and the vehicle ground via one of electrical cables 3106 and 3107. An overheating cut-off fuse 3290 is also mounted onto printed circuit board 3272 and is connected to the control circuitry for shutting off power to the heating elements 3192, 3194 and 3196 in the event of overheating of the liquid heating assembly 3182. Fuse 3290 is preferably formed with an undersurface of a resilient material and is preferably retained in tight thermal engagement with the underside of base 3186 by a cover element 3292.

It is a particular feature of the present invention that the provision of liquid drain aperture 3228 in sleeve 3184 together with leaky one-way valve 3260 provides both overheating and anti-freezing protection for the main assembly 3104. This synergetic functionality may be understood by considering the operation of the system following completion of a spray cycle. At this time, due to deactivation of pump 3114, liquid is not being pumped into liquid heating chamber accommodating volume 3180 and the liquid tends to drain slowly from volume 3180 via channel 3262, leaky one-way valve 3260, liquid inlet pathway portion 3250, liquid inlet conduit 3110 and vehicle pump 3114 to reservoir 3112. Such drainage continues until the level of liquid in liquid heating chamber accommodating volume 3180 reaches the level of liquid drain aperture 3228, at which point air, rather than liquid is drawn into channel 3262, effectively terminating drainage and retaining liquid inside liquid heating chamber accommodating volume 3180 at the level of liquid drain aperture 3228.

Retention of liquid inside liquid heating chamber accommodating volume 3180 at a level preferably not lower than that of liquid drain aperture 3228 ensures that the level of liquid in liquid heating chamber 3216 at least covers most of the heating elements 3192, 3194 and 3196, ensuring rapid heating of the liquid at the next heating cycle and avoiding burning out of the heating elements due to lack of liquid in the vicinity thereof. At the same time retention of liquid inside liquid heating chamber accommodating volume 3180 at a level preferably no higher than that of liquid

drain aperture 3228 ensures that sufficient freezing expansion volume is provided within volume 3180 and within the liquid heating chamber 3216 so that when the vehicle is not being operated and is in a freezing environment, freezing of the liquid therein does not cause cracking of the liquid heating chamber 3216 or of the liquid heating chamber accommodating volume 3180.

Reference is now made to Figs. 24A, 24B, 24C/1, 24C/2, 24C/3, 24D, 24E, 24F, 24G & 24H, which are together a self-explanatory electrical schematic illustration of the circuitry incorporated on PCB 3272 of the system of Figs. 19 - 23. Figs. 24A, 24B, 24C/1, 24C/2, 24C/3, 24D, 24E, 24F, 24G & 24H indicate interconnections of the circuitry on PCB 3272 with various elements of the system of Figs. 19 - 23, whose reference numbers are indicated in parenthesis in Figs. 24A - 24H. The circuitry of Figs. 24A - 24H operates preferably using software contained in the Appendix. Table I contains a list of parts used in the circuitry shown in Figs. 24A-24H.

TABLE I

| Reference Designator(s) | Part | Manufacturer | Part Number | PCB Footprint |
|---|--------------|--------------------|----------------|---------------|
| C1, C2, C4, C12, C24, C26, C29, C30 | 0.01uF, 100V | AVX Corp., SC, USA | 06031C103MAT4A | 0603 |
| C3, C7, C10, C15, C19, C22 | 0.1uF, 100V | AVX Corp., SC, USA | 12061C104MAT4A | 1206 |
| C6, C9, C16, C20, C21, C23, C25, C27, C28 | 1000pF, 100V | AVX Corp., SC, USA | 06031C102MAT4A | 0603 |
| C5, C13, C14, C17, C18, C31, C32 | 0.1uF, 10V | AVX Corp., SC, USA | 0603ZC104MAT4A | 0603 |
| C5A, C5B, C11 | 1uF, 10V | AVX Corp., SC, USA | 0805ZC106KAT4A | 0805 |

| Reference Designator(s) | Part | Manufacturer | Part Number | PCB Footprint |
|--------------------------|---------------------------------|---|----------------------|------------------------|
| C33 | 10uF, 35V | KEMET Electronics, Simpsonville, SC | T491C106M035AS | "C package" or 6032 |
| D1, D3, D6 | Fast Switching Rectifier | Diodes Inc., Westlake Village, CA, USA | RS1D | SMA |
| D9, D12 | General Purpose Rectifier | Diodes Inc., Westlake Village, CA, USA | S1D | SMA |
| D5, D7, D13, D14, D17 | Schottky Barrier Diode | Semiconductor Corp., Santa Clara, CA. USA | MBR0540 | SOD123 |
| D2, D4, D15, D16 | 15V, 500mW, Zener | Semiconductor Corp., Santa Clara, CA. USA | MMSZ5245BT1 | SOD123 |
| D8, D18 | 5.1V, 500mW, Zener | Semiconductor Corp., Santa Clara, CA. USA | MMSZ5231BT1 | SOD123 |
| D19, D20 | DUAL SWITCHING DIODE | Semiconductor Corp., Santa Clara, CA. USA | BAV99LT1 | SOT-23 |
| FU1 | Thermal Cut Off 140C | Thermtrol Corp., North Canton, OH, USA | N6 | THRU |
| JP1 | 5 Pin Locking Connector | Molex Inc. Downers Grove, IL, USA | MOLEX043650-052 7 | MOLEX043 650-0527 |
| JP2 | 8 Pin Header | Molex Inc. Downers Grove, IL, USA | 10-89-1081 | THRU |

| Reference Designator(s) | Part | Manufacturer | Part Number | PCB Footprint |
|-------------------------|-------------------------------|---|--------------------|---------------|
| K1 | RELAY | TYH Enterprise Limited, N.T., Hong Kong | HG4520-012-H1S | RELAY-HG4520 |
| K2 | RELAY | TYH Enterprise Limited, N.T., Hong Kong | HG4119-012-1H11-1A | RELAY-HG4119 |
| L1, L2 | Ferrite Bead, 600ohm @ 100MHz | Murata Manufacturing Co., Ltd., Nagaokakyo-shi, Kyoto | BLM21AG102SN1B | 0805 |
| Q1, Q2 | P Channel MOSFET, 100V | International Rectifier, El Segundo, CA, USA | IRFL9110 | SOT-223 |
| Q3, Q6, Q7 | NPN Darlington, 100V | Zetex plc, Oldham, UK | FMMT614 | SOT-23 |
| Q4, Q5 | Protected N Channel MOSFET | STMicroelectronics, East Bell Road, AZ, USA | VNN1NV0413TR | SOT-223 |
| N1 | Temperature Sensor | EPCOS AG. Corporate Communications, Munich, Germany | G560/50K/F2 | THRU |
| N2 | Temperature Sensor | EPCOS AG. Corporate Communications, Munich, Germany | G560/50K/F2 | THRU |

| Reference Designator(s) | Part | Manufacturer | Part Number | PCB Footprint |
|---|-------------------------------|---|----------------------|------------------|
| R11 | 0 OHM | KOA Speer Electronics Inc., Bradford, PA, USA | RM73Z1JLTDD | 0603 |
| R25 | 1.5k, 5%, 500mW | KOA Speer Electronics Inc., Bradford, PA, USA | RK73B2ELTDD152J | 1210 |
| R1,R5,R6,R9, R14,R18,R20, R21,R22,R27, R28 | 10k, 1% | KOA Speer Electronics Inc., Bradford, PA, USA | RK73GC1JLTD1002 F | 0603 |
| R7,R10,R12, R13,R15,R19, R23,R24 | 100k, 1% | KOA Speer Electronics Inc., Bradford, PA, USA | RK73GC1JLTD1003 F | 0603 |
| R2, R4, R8 | 3.3k, 5%, 500mW | KOA Speer Electronics Inc., Bradford, PA, USA | RK73B2ELTDD332J | 1210 |
| R3, R16, R17 | 33.2k, 1% | KOA Speer Electronics Inc., Bradford, PA, USA | RK73GC1JLTD3322 F | 0603 |
| U1 | 8 BIT Micro-control ler | Motorola Inc. | MC68HC908KX8M DW | SOIC 16 |
| U2 | 5V protected regulator | Micrel Semiconductor, Inc. San Jose, CA, USA | MIC2951-02BM | SOIC 8 |

The Appendix is a software listing of the following computer file:

Appendix containing file HOTSHOT2.S19 and of length 5,434 bytes.

To program the FLASH memory on the Motorola 68HC908

microcontroller that resides inside the Hotshot product the following steps need to be conducted:

- 1). Provide a Personal Computer, such as an Intel-based Pentium III 800 MHz computer, 256 MB RAM and 2 GB Hard Disk configured with Microsoft Windows 2000 operating system.
- 2). Start the Prog08SZ.exe programmer for Windows version 1.38 provided from P&E Microcomputers System Inc, PO Box 2044, Woburn MA 01888-00044 U.S.A.

- a). Select >File > load S19 record

- 1). Create the file HOTSHOT2.S19 based on the Appendix and place it into a temporary directory.

- b). Select >Program

- 1). The Prog08SZ.exe program will read the HOTSHOT2.S19 file and translate this information into the FLASH program and too the threshold parameters.

- 2). The program will indicate when programming is complete.

It is appreciated that the software components of the present invention may, if desired, be implemented in ROM (read-only memory) form. The software components may, generally, be implemented in hardware, if desired, using conventional techniques.

It is appreciated that the particular embodiment implemented by the Appendix is intended only to provide an extremely detailed disclosure of the present invention and is not intended to be limiting.

It will be appreciated by persons skilled in the art that the present invention is not limited by what has been particularly shown and described hereinabove but rather includes both combinations and subcombinations of the various features described hereinabove as well as modifications thereto which would occur to a person reading the foregoing which modifications are not in the prior art.

APPENDIX

S113F6005047440A0A16142D1434360A0A0505080C
S113F6100A04CB9E8A407D5556657273696F6E20CD
5 S113F620302E31202020202030352F30352F30331C
S113F63030393A3032414D686172647761726520C5
S113F64076657273696F6E303030303030303000
S113F65030352F30352F303330393A3032414D0088
S113F66000050F191B1E202325282A2D2E2F313289
10 S113F67033343536373839393A3B3C3D3E3F3F40E9
S113F6804142434445454646474849494A4A4B4B0B
S113F6904C4C4D4E4E4F4F5050515253545455555F
S113F6A056565757585859595A5A5A5B5B5C5C5CC2
S113F6B05D5D5E5F5F5F6060606061616162626248
15 S113F6C06363646465656666676768686869696AD0
S113F6D06A6B6B6C6C6D6D6D6E6E6E6F6F7070714E
S113F6E071727273737474757576767777787879C6
S113F6F0797A7A7B7B7C7C7D7D7E7E7F7F7F808038
S113F70081818282838384858586868787888889A8
20 S113F7108A8A8B8B8C8C8D8D8E8E8F8F909091910D
S113F720929394959696979899999A9B9C9D9E9E50
S113F7309FA0A1A1A2A2A4A5A6A7A8A9AAABACAD6B
S105F740AEAF66
S113F7436E011E6E481F6E08406E04416E80426E49
25 S113F75308366E04376E041C121C6E021D6E103EB6
S113F7636EFE043F006E10053F01810A010DC600C1
S113F77362A1FF240A4500627C20044FC700620E85
S113F783010C45005C7CF6A1082603CDFB2281878E
S113F793C60066A10824425F4FCDF9EABF40CE00FC
30 S113F7A3668CD7007F5FA601CDF9EABF40CE006621

S113F7B38CD700775FA602CDF9EABF40CE00668CF2
S113F7C3D7006F5FA603CDF9EABF40CE00668CD79E
S113F7D300674500667CCCF9E89E6F018C9EEE01C0
S113F7E3D600809EEE01D7007F9EEE01D600789E60
5 S113F7F3EE01D700779EEE01D600709EEE01D7008E
S113F8036F9EEE01D600689EEE01D700679E6C01E1
S113F8139EE601A10725C6A601874F87C600855F1B
S113F82387894FCDF9EACDF9FDA704C70086A6144D
S113F833874F87C6007D5F8789A601CDF9EACDF995
10 S113F843FDA704C7007EA601874F87C600755F879F
S113F85389A602CDF9EACDF9FDA704C70076A6016E
S113F863874F87C6006D5F8789A603CDF9EACDF973
S113F873FDA704C7006E4FC7008DC7008EC7008B5A
S113F883C7008CC70089C7008AC70087C700889E42
15 S113F8936F01CE008DC6008EBF409EEE018CDB004F
S113F8A37F24023C40C7008EB640C7008DCE008B38
S113F8B3C6008CBF409EEE01DB007724023C40C7A8
S113F8C3008CB640C7008BCE0089C6008ABF409E19
S113F8D3EE01DB006F24023C40C7008AB640C70038
20 S113F8E389CE0087C60088BF409EEE01DB006724F3
S113F8F3023C40C70088B640C700879E6C019EE661
S113F90301A108258DA601C70058CE008DC6008E1F
S113F913544654465446CF0051C70052C6F6149970
S113F923C200524FC20051240CC6F612C000524FFB
25 S113F933C200512405A605C70060CE008BC6008C07
S113F943544654465446CF0053C70054C6F615993B
S113F953C200544FC2005325080500051901CDFB0D
S113F96322CE0087C600885446544654469EE70177
S113F9739EE601A10325139EE601A1C4240C9EEE79
30 S113F983018CD6F660C700552005A607C70060C6DC

S113F993F6175FAB3224015CBF40CE00558C899EC1
S113F9A3E00188B6408B95F28A900CB600A4FDB7AB
S113F9B300B600A4F7B700CE0089C6008A544654A3
S113F9C34654469EE7019EE601A10325139EE601E4
5 S113F9D3A1E1240C9EEE018CD6F660C700632005DA
S113F9E3A608C700608A81878987B73C0F3CFDB6A8
S113F9F33D9EE7019EE601A703818789875FA6FFF2
S113FA039EE00924015ABF4095EE068C899EE001CD
S113FA1388B6408B95F28A900DA6FF95E008E70619
10 S113FA23A6FFE008E70295E606E1082406E608E7F0
S113FA3306E702E6085F9EEB0724015CBF4095EEF0
S113FA43028C899EE00188B6408B95F28A959006D4
S113FA53E606EB082026E6085F9EEB0724015CBF5D
S113FA634095EE028C99899EE20188B6408B95F20B
15 S113FA738A910C95E606E1082305E0089EE7019EBA
S113FA83E601A703818BB64087161CCDF792CDF709
S113FA936EC600584B0DC60062A108260609010371
S113FAA3CDFB28CE005DC6005EAB1E24015CCF00F7
S113FAB35DC7005EC6005EA0E8C6005DA203251C08
20 S113FAC3CE005DC6005EA0E8879FA2039786CF00A1
S113FAD35DC7005E45005B7C45005A7CC600602719
S113FAE339090136C60060C70056B600A4FDB70045
S113FAF3B600A4F7B700B600A4EFB7004500657CD1
S113FB03F6A1FA24124500647CF6A111250C7FB6F4
25 S113FB1300A804B7002003CDFB2886B7408A804F92
S113FB23C700602000874FC7FFFF4500FF94CDF750
S113FB3343C600609EE701CDFD3DC6005941010A5D
S113FB43C600602605A601C700609EE601C70060E3
S113FB534FC7FFFF111F9A2003C7FFFFC600582793
30 S113FB63F820044FC7FFFFC60062A10826F5B600BC

S113FB73AA04B7001801C600604104044FC700601B
S113FB83C6F613C000524FC200512505A606C7008E
S113FB9360C6F6005FAB3224015CBF40CE00558CD7
S113FBA3899EE00188B6408B95F28A901DC6F60FB4
5 S113FBB35F8789C6F60D8789C6F60B8789C6F6095A
S113FBC3AB3224015CCDFCC2A706C6F6075F878966
S113FBD3C6F6058789C6F6038789C6F601AB3224C0
S113FBE3372034C6F6105F8789C6F60E8789C6F6B2
S113FBF30C8789C6F60AAB3224015CCDFCC2A70686
10 S113FC03C6F6085F8789C6F6068789C6F604878918
S113FC13C6F602AB3224015CAD59A706C6F611A0A1
S113FC2301874FA2009786BF40CE00578C99899EC7
S113FC33E20188B6408B95F28A90A8B600A4FDB77A
S113FC4300B600A4F7B700C6F6105F8789C6F60EA0
15 S113FC538789C6F60C8789C6F60AAB3224015CADE4
S113FC635EA70620044FC7FFFC6006026F7CDFB3F
S113FC73288A818789C600602642B600AA02B70093
S113FC83B600AA08B700CDFD114FC7005A2019C703
S113FC93FFFFC6005BE107250FAD73C6006195E165
20 S113FCA3052205A604C70060C6005A95E109240C81
S113FCB3C60055E1012205C6006027D3A702818748
S113FCC3894500577CC60060263BB600AA10B700DE
S113FCD3AD3C4FC7005A2019C7FFFC6005BE107BD
S113FCE3250FAD2A95E605C100612305A603C700C8
25 S113FCF360C6005595E101250CC6005AE1092405A7
S113FD03C6006027D3B600A4EFB700A70281C600DC
S113FD135FC100552508C6005FC00055200EC6000C
S113FD2355C1005F2309C60055C0005FC70061C603
S113FD330055C7005F4FC7005B81A7FEA60195E787
30 S113FD43017F8C9EEE01A6FFD7005041FF039E6FF7

S113FD5302A6AAD7005041AA039E6F02A655D70054

S113FD63504155039E6F024FD7005027039E6F02E5

S113FD739E6C019EE601A13025C99EE602C7005987

S106FD83A702814F

5 S113FFDCFA88FB22FB22FB22FB22FB2200000000FE

S113FFEC000000000000FB22FB22FB22FB22FB2270

S107FFFCFB22FB22C3

S903FFFFFFE

C L A I M S

1. A liquid heating assembly comprising:
a heat-conductive displaceable element; and
5 a liquid heating enclosure defining a liquid heating volume including a primary liquid heating volume portion and a secondary liquid heating volume portion, separated by said heat-conductive displaceable element, said primary liquid heating volume portion including a heat exchanger for directly heating liquid in said primary liquid heating volume portion and for indirectly heating liquid in said secondary liquid heating volume portion via said heat-conductive displacement element.
10
2. A liquid heating assembly according to claim 1 and wherein said heat-conductive displaceable element comprises a resilient, flexible element.
- 15 3. A liquid heating assembly according to claim 1 or claim 2 and wherein said heat-conductive displaceable element forms at least a wall both of said primary liquid heating volume portion and of said secondary liquid heating volume portion.
4. A liquid heating assembly according to any of the preceding claims and
20 wherein at least said liquid heating enclosure defines a primary liquid flow pathway in said primary liquid heating volume portion and a secondary liquid flow pathway in said secondary liquid heating volume portion, said secondary liquid flow pathway supplying liquid to said primary liquid flow pathway.
- 25 5. A liquid heating assembly according to any of the preceding claims and wherein said primary liquid heating volume portion is formed of a relatively rigid, highly heat conductive material.
6. A liquid heating assembly according to claim 5 and wherein said
30 secondary liquid heating volume portion is formed of a material which is less rigid and less heat conductive than said material forming said primary liquid heating volume portion.

7. A liquid heating assembly according to claim 4 and wherein at least said primary liquid flow pathway is defined by said liquid heating enclosure and by said heat-conductive displacement element.

5

8. A liquid heating assembly according to any of the preceding claims and wherein at least said liquid heating enclosure defines an at least partially turbulent flow primary liquid flow pathway in said primary liquid heating volume portion and an at least partially turbulent flow secondary liquid flow pathway in said secondary liquid heating volume portion, said at least partially turbulent flow secondary liquid flow pathway supplying liquid to said at least partially turbulent flow primary liquid flow pathway.

10

9. A liquid heating assembly according to any of the preceding claims and wherein said primary liquid heating volume portion is formed at least partially of a metal material, which is relatively highly heat conductive and said secondary liquid heating volume portion is formed at least partially of a plastic material, which is relatively heat insulative, separated by said heat-conductive displaceable element, formed of a material which is less heat conductive than said metal material.

15

20

10. A liquid heating assembly according to claim 9 and wherein said heat-conductive displaceable element is formed of a material which is more heat conductive than said plastic material.

25

11. A liquid heating assembly according to any of the preceding claims and wherein said heat-conductive displaceable element is apertured to permit liquid communication from said secondary liquid heating volume portion to said primary liquid heating volume portion.

30

12. A liquid heating assembly according to any of the preceding claims and wherein said secondary liquid heating volume portion includes at least one displaceable outer wall portion providing freeze protection by virtue of its displaceability.

13. A liquid heating assembly according to claim 12 and wherein said heat-conductive displaceable element is operative to be displaced into said secondary liquid heating volume portion upon freezing of liquid inside said primary liquid heating volume portion.

14. A liquid heating assembly according to any of the preceding claims and wherein said heat-conductive displaceable element is an intervening liquid impermeable diaphragm.

15. A liquid heating assembly according to any of the preceding claims and wherein said primary liquid heating volume portion is a first conduit element and said secondary liquid heating volume portion is a second conduit element.

16. A liquid heating assembly according to claim 15 and wherein said heat exchanger is defined by said first conduit element and said second conduit element.

17. A vehicle comprising:
a vehicle chassis including a drive train;
a vehicle body including at least one vehicle surface which requires washing;

a vehicle washing liquid reservoir;
a vehicle washing liquid discharge assembly;
a vehicle surface washer assembly operative to employ said vehicle washing liquid discharge assembly and a washing liquid from said vehicle washing liquid reservoir for washing said at least one vehicle surface which requires washing; ,

a liquid heating assembly operative to employ said vehicle washing liquid discharge assembly and said washing liquid from said vehicle washing liquid reservoir for providing a spray of heated liquid onto said at least one vehicle surface which requires washing, said liquid heating assembly comprising:

a heat-conductive displaceable element; and

a liquid heating enclosure defining a liquid heating volume including a primary liquid heating volume portion and a secondary liquid heating volume portion, separated by said heat-conductive displaceable element, said primary liquid heating volume portion including a heat exchanger for directly heating liquid in said primary liquid heating volume portion and for indirectly heating liquid in said secondary liquid heating volume portion via said heat-conductive displacement element.

18. A vehicle according to claim 17 and wherein said heat-conductive displaceable element comprises a resilient, flexible element.

19. A vehicle according to claim 17 or claim 18 and wherein said heat-conductive displaceable element forms at least a wall both of said primary liquid heating volume portion and of said secondary liquid heating volume portion.

20. A vehicle according to any of the preceding claims 17 – 19 and wherein at least said liquid heating enclosure defines a primary liquid flow pathway in said primary liquid heating volume portion and a secondary liquid flow pathway in said secondary liquid heating volume portion, said secondary liquid flow pathway supplying liquid to said primary liquid flow pathway.

21. A vehicle according to any of the preceding claims 17 – 20 and wherein said primary liquid heating volume portion is formed of a relatively rigid, highly heat conductive material.

22. A vehicle according to claim 21 and wherein said secondary liquid heating volume portion is formed of a material which is less rigid and less heat conductive than said material forming said primary liquid heating volume portion.

23. A vehicle according to claim 20 and wherein at least said primary liquid flow pathway is defined by said liquid heating enclosure and by said heat-conductive displacement element.

24. A vehicle according to any of the preceding claims 17 – 23 and wherein at least said liquid heating enclosure defines an at least partially turbulent flow primary liquid flow pathway in said primary liquid heating volume portion and an at least partially turbulent flow secondary liquid flow pathway in said secondary liquid heating volume portion, said least partially turbulent flow secondary liquid flow pathway supplying liquid to said least partially turbulent flow primary liquid flow pathway.

25. A vehicle according to any of the preceding claims 17 – 24 and wherein said primary liquid heating volume portion is formed at least partially of a metal material, which is relatively highly heat conductive and said secondary liquid heating volume portion is formed at least partially of a plastic material, which is relatively heat insulative; separated by said heat-conductive-displaceable element, formed of a material which is less heat conductive than said metal material.

26. A vehicle according to claim 25 and wherein said heat-conductive displaceable element is formed of a material which is more heat conductive than said plastic material.

27. A vehicle according to any of the preceding claims 17 – 26 and wherein said heat-conductive displaceable element is apertured to permit liquid communication from said secondary liquid heating volume portion to said primary liquid heating volume portion.

28. A vehicle according to any of the preceding claims 17 – 27 and wherein said secondary liquid heating volume portion includes at least one displaceable outer wall portion providing freeze protection by virtue of its displaceability.

29. A vehicle according to claim 28 and wherein said heat-conductive displaceable element is operative to be displaced into said secondary liquid heating volume portion upon freezing of liquid inside said primary liquid heating volume portion.

30. A vehicle according to any of the preceding claims 17 – 29 and wherein said at least one vehicle surface which requires washing includes at least one of the following surfaces:

5 a front vehicle windshield surface, a back vehicle windshield surface, side vehicle windows, a vehicle headlight surface, a vehicle rear light surface, a vehicle radar antenna surface and a vehicle exterior mirror surface.

31. A vehicle according to any of the preceding claims 17 – 30 and wherein said heat-conductive displaceable element is an intervening liquid impermeable
10 diaphragm.

32. A vehicle according to any of the preceding claims 17 – 31 and wherein said primary liquid heating volume portion is a first conduit element and said secondary liquid heating volume portion is a second conduit element.

15

33. A vehicle according to claim 32 and wherein said heat exchanger is defined by said first conduit element and said second conduit element.

34. A vehicle according to any of the preceding claims 17 – 33 and wherein
20 user activation activates said spray of heated liquid onto said at least one vehicle surface which requires washing.

35. A vehicle according to any of the preceding claims 17 – 34 and wherein automatic activation activates said spray of heated liquid onto said at least one vehicle
25 surface which requires washing.

36. A vehicle according to claim 35 and wherein said automatic activation is provided by an AGC actuation signal.

30 37. A vehicle according to any of the preceding claims 17 – 36 and wherein said liquid heating assembly is operative to employ said vehicle washing liquid discharge assembly and said washing liquid from said vehicle washing liquid reservoir

for providing a spray of liquid onto a vehicle windshield surface and a vehicle radar antenna surface.

38. A vehicle according to claim 37 and also comprising a normally-open valve interconnecting vehicle windshield sprayers of said vehicle windshield surface to said vehicle washing liquid discharge assembly and being operative, when open, to bypass vehicle radar antenna sprayers of said vehicle radar antenna surface.

39. A vehicle according to claim 38 and also comprising a flow restrictor, restricting liquid flow to said vehicle radar antenna sprayers to ensure liquid is supplied to said vehicle windshield sprayers when said normally-open valve is open.

40. A vehicle comprising:

a vehicle chassis including a drive train;

a vehicle body including at least one vehicle surface which requires washing;

a vehicle washing liquid reservoir;

a vehicle washing liquid discharge assembly;

a vehicle surface washer assembly operative to employ said vehicle washing liquid discharge assembly and a washing liquid from said vehicle washing liquid reservoir for washing said at least one vehicle surface which requires washing;

a liquid heating assembly operative to employ said vehicle washing liquid discharge assembly and said washing liquid from said vehicle washing liquid reservoir for providing a spray of heated liquid onto said at least one surface which requires washing; and

a normally closed automatically operative valve interconnecting said vehicle washing liquid reservoir to said vehicle washing liquid discharge assembly and being operative, when open, to bypass said liquid heating assembly.

41. A vehicle according to claim 40 and also comprising a vehicle pump connected upstream of said at least one vehicle washing liquid reservoir and downstream of said normally closed automatically operative valve.

42. A vehicle according to claim 40 or claim 41 and wherein said liquid heating assembly comprises:

a heat-conductive displaceable element; and

5 a liquid heating enclosure defining a liquid heating volume including a primary liquid heating volume portion and a secondary liquid heating volume portion, separated by said heat-conductive displaceable element, said primary liquid heating volume portion including a heat exchanger for directly heating liquid in said primary liquid heating volume portion and for indirectly heating liquid in said secondary liquid heating volume portion via said heat-conductive displacement element.

43. A vehicle according to claim 42 and wherein said heat-conductive displaceable element comprises a resilient, flexible element.

15 44. A vehicle according to claim 42 or claim 43 and wherein said heat-conductive displaceable element forms at least a wall both of said primary liquid heating volume portion and of said secondary liquid heating volume portion.

20 45. A vehicle according to any of the preceding claims 42 – 44 wherein at least said liquid heating enclosure defines a primary liquid flow pathway in said primary liquid heating volume portion and a secondary liquid flow pathway in said secondary liquid heating volume portion, said secondary liquid flow pathway supplying liquid to said primary liquid flow pathway.

25 46. A vehicle according to any of the preceding claims 42 – 45 and wherein said primary liquid heating volume portion is formed of a relatively rigid, highly heat conductive material.

30 47. A vehicle according to claim 46 and wherein said secondary liquid heating volume portion is formed of a material which is less rigid and less heat conductive than said material forming said primary liquid heating volume portion.

48. A vehicle according to claim 45 and wherein at least said primary liquid flow pathway is defined by said liquid heating enclosure and by said heat-conductive displacement element.

5 49. A vehicle according to any of the preceding claims 42 – 48 and wherein at least said liquid heating enclosure defines an at least partially turbulent flow primary liquid flow pathway in said primary liquid heating volume portion and an at least partially turbulent flow secondary liquid flow pathway in said secondary liquid heating volume portion, said at least partially turbulent flow secondary liquid flow pathway
10 supplying liquid to said at least partially turbulent flow primary liquid flow pathway.

50. A vehicle according to any of the preceding claims 42 – 49 and wherein said primary liquid heating volume portion is formed at least partially of a metal material, which is relatively highly heat conductive and said secondary liquid heating
15 volume portion is formed at least partially of a plastic material, which is relatively heat insulative, separated by said heat-conductive displaceable element, formed of a material which is less heat conductive than said metal material.

51. A vehicle according to claim 50 and wherein said heat-conductive
20 displaceable element is formed of a material which is more heat conductive than said plastic material.

52. A vehicle according to any of the preceding claims 42 – 51 and wherein
said heat-conductive displaceable element is apertured to permit liquid communication
25 ~~from~~ said secondary liquid heating volume portion to said primary liquid heating
~~volume~~ portion.

53. A vehicle according to any of the preceding claims 42 – 52 and wherein
said secondary liquid heating volume portion includes at least one displaceable outer
30 wall portion providing freeze protection by virtue of its displaceability.

54. A vehicle according to claim 53 and wherein said heat-conductive displaceable element is operative to be displaced into said secondary liquid heating volume portion upon freezing of liquid inside said primary liquid heating volume portion.

5

55. A vehicle according to any of the preceding claims 42 – 54 and wherein said at least one vehicle surface which requires washing includes at least one of the following surfaces:

10 a front vehicle windshield surface, a back vehicle windshield surface, a side vehicle window, a vehicle headlight surface, a vehicle rear light surface, a vehicle radar antenna surface and a vehicle exterior mirror surface.

15 56. A vehicle according to any of the preceding claims 42 – 55 and wherein said heat-conductive displaceable element is an intervening liquid impermeable diaphragm.

20 57. A vehicle according to any of the preceding claims 42 – 56 and wherein said primary liquid heating volume portion is a first conduit element and said secondary liquid heating volume portion is a second conduit element.

58. A vehicle according to claim 57 and wherein said heat exchanger is defined by said first conduit element and said second conduit element.

25 59. A vehicle according to any of the preceding claims 40 – 58 and wherein said normally closed automatically operative valve is a differential pressure responsive one-way valve.

30 60. A vehicle according to any of the preceding claims 40 – 59 and wherein user activation activates said spray of heated liquid onto said at least one vehicle surface which requires washing.

61. A vehicle according to any of the preceding claims 40 – 60 and wherein automatic activation activates said spray of heated liquid onto said at least one vehicle surface which requires washing.

5 62. A vehicle according to claim 61 and wherein said automatic activation is provided by an AGC actuation signal.

63. A vehicle according to any of the preceding claims 40 – 62 and wherein said liquid heating assembly is operative to employ said vehicle washing liquid
10 discharge assembly and said washing liquid from said vehicle washing liquid reservoir for providing a spray of liquid onto a vehicle windshield surface and a vehicle radar antenna surface.

64. A vehicle according to claim 63 and also comprising a normally-open
15 valve interconnecting vehicle windshield sprayers of said vehicle windshield surface to said vehicle washing liquid discharge assembly and being operative, when open, to bypass vehicle radar antenna sprayers of said vehicle radar antenna surface.

65. A vehicle according to claim 64 and also comprising a flow restrictor,
20 restricting liquid flow to said vehicle radar antenna sprayers to ensure liquid is supplied to said vehicle windshield sprayers when said normally-open valve is open.

66. A liquid heating method comprising:
providing a liquid heating enclosure defining a liquid heating volume
25 including a primary liquid heating volume portion and a secondary liquid heating volume portion, separated by a heat-conductive displaceable element; and
directly heating liquid in said primary liquid heating volume portion,
thereby indirectly heating liquid in said secondary liquid heating volume portion via
said heat-conductive displacement element.

30

67. A liquid heating method according to claim 66 and wherein said heat-conductive displaceable element is resiliently and flexibly displaceable.

68. A liquid heating method according to claim 66 or claim 67 and wherein said heat-conductive displaceable element separates said primary liquid heating volume portion and said secondary liquid heating volume portion.

5

69. A liquid heating method according to any of the preceding claims 66 – 68 and wherein liquid flows into a primary liquid flow pathway in said primary liquid heating volume portion from a secondary liquid flow pathway in said secondary liquid heating volume portion.

10

70. A liquid heating method according to any of the preceding claims 66 – 69 and wherein at least said liquid flows in at least partially turbulent flow primary liquid flow through said primary liquid heating volume portion following flowing in at least partially turbulent flow secondary liquid flow through said secondary liquid heating volume portion.

15

71. A liquid heating method according to any of the preceding claims 66 – 70 and wherein said liquid flows via an aperture formed in said heat-conductive displaceable element to permit liquid communication from said secondary liquid heating volume portion to said primary liquid heating volume portion.

20

72. A liquid heating method according to any of the preceding claims 66 – 71 and wherein at least one displaceable outer wall portion of said secondary liquid heating volume portion is displaced into said secondary liquid heating volume portion upon freezing of liquid inside said primary liquid heating volume portion.

25

73. A vehicle operation method comprising:
providing a vehicle including at least one vehicle surface which requires washing; and

30

washing said at least one vehicle surface which requires washing by supplying heated liquid from a reservoir as a spray of heated liquid onto said at least one surface which requires washing including causing liquid from said reservoir to be

directly heated in a primary liquid heating volume portion and to be indirectly heated in a secondary liquid heating volume portion via a heat-conductive element separating said primary and secondary liquid heating volume portions.

5 74. A vehicle operation method according to claim 73 and wherein said primary and secondary liquid heating volume portions are defined by a liquid heating enclosure, and wherein said primary liquid heating volume portion includes a heat exchanger for directly heating said liquid in said primary liquid heating volume portion and for indirectly heating said liquid in said secondary liquid heating volume portion via
10 said heat-conductive displacement element.

75. A vehicle operation method according to claim 73 or claim 74 and wherein said heat-conductive displaceable element is resiliently and flexibly displaceable.

15

76. A vehicle operation method according to any of the preceding claims 73 – 75 and wherein said heat-conductive displaceable element separates said primary liquid heating volume portion and said secondary liquid heating volume portion.

20 77. A vehicle operation method according to any of the preceding claims 73 – 76 and wherein said liquid flows into a primary liquid flow pathway in said primary liquid heating volume portion from a secondary liquid flow pathway in said secondary liquid heating volume portion.

25 78. A vehicle operation method according to any of the preceding claims 73 – 77 and wherein at least said liquid flows in at least partially turbulent flow primary liquid flow through said primary liquid heating volume portion following flowing in at least partially turbulent flow secondary liquid flow through said secondary liquid heating volume portion.

30

79. A vehicle operation method according to any of the preceding claims 73 – 78 and wherein at least one displaceable outer wall portion of said secondary liquid

heating volume portion is displaced into said secondary liquid heating volume portion upon freezing of liquid inside said primary liquid heating volume portion.

80. A vehicle operation method according to any of the preceding claims 73
5 – 79 and wherein said washing includes an heated initial spray cycle.

81. A vehicle operation method according to claim 80 and wherein said
indirectly heating liquid in said secondary liquid heating volume portion during a
relatively long time duration after initial operation of a motor of said vehicle causes said
10 initial spray cycle to be relatively longer than when said indirectly heating liquid in said
secondary liquid heating volume portion is during a relatively short time duration after
said initial operation of said motor of said vehicle.

82. A vehicle operation method according to claim 80 and wherein said
15 supplying heated liquid onto said at least one surface is nearly instantaneous when said
indirectly heating liquid in said secondary liquid heating volume portion is for a
relatively short time duration after said initial operation of said motor of said vehicle.

83. A vehicle operation method according to claim 80 and wherein said
20 indirectly heating liquid in said secondary liquid heating volume portion during a
relatively long time duration after a previous spray cycle causes said initial spray cycle
to be relatively longer than when said indirectly heating liquid in said secondary liquid
heating volume portion is during a relatively short time duration after said previous
spray cycle.

84. A vehicle operation method according to claim 80 and wherein said
25 supplying heated liquid onto said at least one surface is nearly instantaneous when said
indirectly heating liquid in said secondary liquid heating volume portion is for a
relatively short time duration after a previous spray cycle.

85. A vehicle operation method comprising:

providing a vehicle including at least one vehicle surface which requires washing; and

washing said at least one vehicle surface which requires washing by at least one of:

5 supplying heated liquid from a liquid reservoir via a liquid heating assembly as a spray of heated liquid onto said at least one surface which requires washing; and

supplying unheated liquid from said liquid reservoir via a normally closed automatically operative valve which, when open, bypasses said liquid heating
10 assembly.

86. A vehicle operation method according to claim 85 and wherein a vehicle pump connects upstream of said liquid reservoir and downstream of said normally closed automatically operative valve.

15

87. A vehicle operation method according to claim 85 or claim 86 and also comprising:

providing a vehicle including said at least one vehicle surface which requires washing; and

20

washing said at least one vehicle surface which requires washing by supplying heated liquid from said liquid reservoir as a spray of heated liquid onto said at least one surface which requires washing including causing liquid from said liquid reservoir to be directly heated in a primary liquid heating volume portion and to be indirectly heated in a secondary liquid heating volume portion via a heat-conductive
25 element separating said primary and secondary liquid heating volume portions.

25

88. A vehicle operation method according to claim 87 and wherein said ~~primary~~ and secondary liquid heating volume portions are defined by a liquid heating enclosure, and wherein said primary liquid heating volume portion includes a heat
30 exchanger for directly heating said liquid in said primary liquid heating volume portion and for indirectly heating said liquid in said secondary liquid heating volume portion via said heat-conductive displacement element.

89. A vehicle operation method according to any of the preceding claims 87 – 88 and wherein said heat-conductive displaceable element is resiliently and flexibly displaceable.

5

90. A vehicle operation method according to any of the preceding claims 87 – 89 and wherein said heat-conductive displaceable element separates said primary liquid heating volume portion and said secondary liquid heating volume portion.

10 91. A vehicle operation method according to any of the preceding claims 87 – 90 and wherein said liquid flows into a primary liquid flow pathway in said primary liquid heating volume portion from a secondary liquid flow pathway in said secondary liquid heating volume portion.

15 92. A vehicle operation method according to any of the preceding claims 87 – 91 and wherein at least said liquid flows in at least partially turbulent flow primary liquid flow through said primary liquid heating volume portion following flowing in at least partially turbulent flow secondary liquid flow through said secondary liquid heating volume portion.

20

93. A vehicle operation method according to any of the preceding claims 87 – 92 and wherein said liquid flows via an aperture formed in said heat-conductive displaceable element to permit liquid communication from said secondary liquid heating volume portion to said primary liquid heating volume portion.

25

94. A vehicle operation method according to any of the preceding claims 87 – 93 and wherein at least one displaceable outer wall portion of said secondary liquid heating volume portion is displaced into said secondary liquid heating volume portion upon freezing of liquid inside said primary liquid heating volume portion.

30

95. A vehicle operation method according to any of the preceding claims 85 – 94 and wherein said washing includes an heated initial spray cycle.

96. A vehicle operation method according to claim 95 and wherein said indirectly heating liquid in said secondary liquid heating volume portion during a relatively long time duration after initial operation of a motor of said vehicle causes said initial spray cycle to be relatively longer than when said indirectly heating liquid in said secondary liquid heating volume portion is during a relatively short time duration after said initial operation of said motor of said vehicle.

97. A vehicle operation method according to claim 95 and wherein said supplying heated liquid onto said at least one surface is nearly instantaneous when said indirectly heating liquid in said secondary liquid heating volume portion is for a relatively short time duration after said initial operation of said motor of said vehicle.

98. A vehicle operation method according to claim 95 and wherein said indirectly heating liquid in said secondary liquid heating volume portion during a relatively long time duration after a previous spray cycle causes said initial spray cycle to be relatively longer than when said indirectly heating liquid in said secondary liquid heating volume portion is during a relatively short time duration after said previous spray cycle.

99. A vehicle operation method according to claim 95 and wherein said supplying heated liquid onto said at least one surface is nearly instantaneous when said indirectly heating liquid in said secondary liquid heating volume portion is for a relatively short time duration after a previous spray cycle.

100. A heated liquid discharge system comprising:
a main assembly which provides liquid heating and includes electrical and liquid flow control functionalities;
a liquid inflow conduit supplying liquid from a liquid reservoir to said main assembly; and
a liquid outflow conduit supplying liquid to at least one sprayer located at at least one location on a motor vehicle,

said main assembly comprising a liquid heating chamber communicating with said liquid inflow conduit and said liquid outflow conduit and being formed with a liquid drain aperture located on a side thereof which permits draining of liquid from said liquid heating chamber generally down to a level of said liquid drain aperture.

5

101. A heated liquid discharge system according to claim 100 and wherein said draining takes place when a vehicle pump supplying liquid to said liquid inflow conduit is not in operation.

10

102. A heated liquid discharge system according to claim 100 or claim 101 and wherein said at least one location includes at least one of the following locations:

front vehicle windshield, back vehicle windshield, side vehicle windows, vehicle headlights, vehicle rear lights and vehicle exterior mirrors.

15

103. A heated liquid discharge system according to any of the preceding claims 100 - 102 and wherein a vehicle operator actuation switch is electrically coupled to said main assembly.

20

104. A heated liquid discharge system according to any of the preceding claims 100 - 103 and wherein said main assembly is connected to a vehicle computer.

25

105. A heated liquid discharge system according to any of the preceding claims 100 - 104 and wherein said main assembly is connected to a vehicle ignition switch.

106. A heated liquid discharge system according to any of the preceding claims 100 - 105 and wherein said main assembly comprises a principal housing portion and a cover housing portion.

30

107. A heated liquid discharge system according to claim 106 and wherein said principal housing portion defines a generally circular cylindrical liquid heating

chamber accommodating volume in a major portion of which is disposed a liquid heating assembly including said liquid heating chamber.

108. A heated liquid discharge system according to any of claims 100 - 107
5 and wherein said liquid heating chamber comprises a generally circular cylindrical outer sleeve.

109. A heated liquid discharge system according to claim 107 and wherein
10 said liquid heating assembly comprises a plurality of heating elements located within said liquid heating chamber.

110. A heated liquid discharge system according to claim 109 and wherein
electrical characteristics of individual ones of said plurality of heating elements are
different from each other.

111. A heated liquid discharge system according to claim 107 and wherein
said principal housing portion defines a liquid inlet channel and a heated liquid outlet
channel, both communicating with said liquid heating chamber accommodating volume
and respectively communicating with said liquid inflow conduit and said liquid outflow
20 conduit.

112. A heated liquid discharge system according to claim 111 and wherein
said principal housing portion also defines a heated liquid temperature sensor mounting
aperture which communicates with said liquid heating chamber accommodating
25 volume.

113. A heated liquid discharge system according to claim 112 and wherein
liquid supplied to said liquid heating chamber accommodating volume via said liquid
inlet channel enters said liquid heating chamber via at least two liquid inlet apertures
30 formed in said liquid heating chamber including a first aperture located near a base of
said liquid heating chamber and a second aperture located at an opposite side of said

liquid heating chamber from said first aperture and near a middle of a height of said liquid heating chamber.

114. A heated liquid discharge system according to claim 113 and wherein
5 during operation of said vehicle pump supplying liquid to said liquid inflow conduit a level of said liquid exceeds said height of said liquid heating chamber and fills said liquid heating chamber accommodating volume.

115. A heated liquid discharge system according to claim 114 and wherein
10 said liquid drain aperture is located on a side of said liquid heating chamber just below the top thereof, which permits draining of said liquid from said liquid heating chamber accommodating volume generally only down to said level of said liquid drain aperture when said vehicle pump is not in operation.

116. A heated liquid discharge system according to claim 115 and wherein
15 said liquid from said liquid reservoir is supplied by said vehicle pump via said liquid inlet conduit via a liquid inlet pathway portion of a liquid connector assembly, which also defines a liquid outlet pathway portion.

117. A heated liquid discharge system according to claim 116 and wherein
20 said liquid connector assembly defines a differential pressure bypass pathway portion, which is controlled by a one-way valve and which permits liquid flow from said liquid inlet pathway portion to said liquid outlet pathway portion when a pressure differential thereacross reaches a predetermined threshold, which indicates the existence of a
25 blockage in a liquid path through said liquid heating chamber accommodating volume.

118. A heated liquid discharge system according to claim 117 and wherein
said liquid inlet pathway portion comprises a leaky one way valve which permits supply
of liquid under pressure to said liquid heating chamber accommodating volume but
30 restricts backflow therethrough to a relatively slow rate.

119. A heated liquid discharge system according to claim 118 and wherein said liquid passes through said liquid inlet channel, fills said liquid heating chamber accommodating volume and flows into said liquid heating chamber via said first and second apertures.

5

120. A heated liquid discharge system according to claim 119 and wherein said liquid is heated in said liquid heating chamber and a temperature of said liquid or of air overlying said liquid, depending on the liquid level of said liquid, is sensed by at least one temperature sensor.

10

121. A heated liquid discharge system according to claim 120 and wherein said at least one temperature sensor is mounted onto a printed circuit board which is mounted within said principal housing portion and located outside of said liquid heating chamber accommodating volume.

15

122. A heated liquid discharge system according to any of the preceding claims 100 - 121 and also comprising control circuitry, for operation of said main assembly, which is connected to said at least one temperature sensor.

20

123. A heated liquid discharge system according to any of the preceding claims 100 - 122 and also comprising an overheating cut-off fuse for shutting off electrical power to at least part of said main assembly in the event of overheating of said liquid heating chamber.

25

124. A heated liquid discharge system according to claim 123 and wherein said fuse is formed with an undersurface of a resilient material and is retained in tight thermal engagement with the underside of a base of said liquid heating element.

30

125. A heated liquid discharge system according to any of the preceding claims 100 - 124 and wherein said liquid drain aperture together with a leaky one-way valve provides both overheating and anti-freezing protection for said main assembly.

126. A heated liquid discharge system according to claim 125 and wherein when said liquid is not being pumped into said liquid heating chamber, said liquid tends to drain slowly from said liquid heating chamber via said leaky one-way valve until a level of liquid in said liquid heating chamber reaches said level of said liquid drain aperture, at which point air, rather than liquid is drawn into said liquid outflow conduit, effectively terminating drainage and retaining liquid inside said liquid heating chamber accommodating volume generally at said level of said liquid drain aperture.

127. A heated liquid discharge system according to claim 126 and wherein retention of liquid inside said liquid heating chamber at a level generally not lower than that of said liquid drain aperture ensures that said level of liquid in said liquid heating chamber at least covers most of said heating elements located therein, ensuring rapid heating of said liquid and avoiding burning out of said heating elements due to lack of said liquid in the vicinity thereof and retention of said liquid inside said liquid heating chamber at a level no higher than that of said liquid drain aperture ensures that sufficient freezing expansion volume is provided so that when the vehicle is not being operated and is in a freezing environment, freezing of said liquid therein does not cause cracking of said liquid heating chamber.

128. A heated liquid discharge system comprising:
a main assembly which provides liquid heating and includes electrical and liquid flow control functionalities;
a liquid inflow conduit supplying liquid from a liquid reservoir to said main assembly; and
a liquid outflow conduit supplying liquid to at least one sprayer located at at least one location on a motor vehicle,
said liquid inflow conduit having connected in series therewith a leaky one-way valve which permits limited backflow of liquid from said main assembly to said reservoir.

129. A heated liquid discharge system according to claim 128 and wherein said main assembly comprises a liquid heating chamber communicating with said liquid

inflow conduit and said liquid outflow conduit and being formed with a liquid drain aperture located on a side thereof which permits draining of liquid from said liquid heating chamber generally down to level of said liquid drain aperture via said leaky one-way valve.

5

130. A heated liquid discharge system according to claim 129 and wherein said draining takes place when a vehicle pump supplying liquid to said liquid inflow conduit is not in operation.

10

131. A heated liquid discharge system according to any of the preceding claims 128 - 130 and wherein said at least one location includes at least one of the following locations: - - - - -

front vehicle windshield, back vehicle windshield, side vehicle windows, vehicle headlights, vehicle rear lights and vehicle exterior mirrors.

15

132. A heated liquid discharge system according to any of the preceding claims 128 - 131 and wherein a vehicle operator actuation switch is electrically coupled to said main assembly.

20

133. A heated liquid discharge system according to any of the preceding claims 128 - 132 and wherein said main assembly is connected to a vehicle computer.

134. A heated liquid discharge system according to any of the preceding claims 128 - 133 and wherein said main assembly is connected to a vehicle ignition switch.

25

135. A heated liquid discharge system according to any of the preceding claims 128 - 134 and wherein said main assembly comprises a principal housing portion and a cover housing portion.

30

136. A heated liquid discharge system according to claim 135 and wherein said principal housing portion defines a generally circular cylindrical liquid heating

chamber accommodating volume in a major portion of which is disposed a liquid heating assembly including said liquid heating chamber.

137. A heated liquid discharge system according to any of the preceding
5 claims 128 - 136 and wherein said liquid heating chamber comprises a generally circular cylindrical outer sleeve.

138. A heated liquid discharge system according to any of the preceding
10 claims 128 - 137 and wherein said liquid heating assembly comprises a plurality of heating elements located within said liquid heating chamber.

139. A heated liquid discharge system according to claim 138 and wherein
15 electrical characteristics of individual ones of said plurality of heating elements are different from each other.

140. A heated liquid discharge system according to claim 136 and wherein
said principal housing portion defines a liquid inlet channel and a heated liquid outlet
channel, both communicating with said liquid heating chamber accommodating volume
and respectively communicating with said liquid inflow conduit and said liquid outflow
20 conduit.

141. A heated liquid discharge system according to claim 140 and wherein
said principal housing portion also defines a heated liquid temperature sensor mounting
aperture which communicates with said liquid heating chamber accommodating
25 volume.

142. A heated liquid discharge system according to claim 141 and wherein
liquid supplied to said liquid heating chamber accommodating volume via said liquid
inlet channel enters said liquid heating chamber via at least two liquid inlet apertures
30 formed in said liquid heating chamber including a first aperture located near a base of
said liquid heating chamber and a second aperture located at an opposite side of said

liquid heating chamber from said first aperture and near a middle of a height of said liquid heating chamber.

143. A heated liquid discharge system according to claim 142 and wherein during operation of said vehicle pump supplying liquid to said liquid inflow conduit a level of said liquid exceeds said height of said liquid heating chamber and fills said liquid heating chamber accommodating volume.

144. A heated liquid discharge system according to claim 143 and wherein said liquid drain aperture is located on a side of said liquid heating chamber just below the top thereof, which permits draining of said liquid from said liquid heating chamber accommodating volume generally only down to said level of said liquid drain aperture when said vehicle pump is not in operation.

145. A heated liquid discharge system according to claim 144 and wherein said liquid from said liquid reservoir is supplied by said vehicle pump via said liquid inlet conduit via a liquid inlet pathway portion of a liquid connector assembly, which also defines a liquid outlet pathway portion.

146. A heated liquid discharge system according to claim 145 and wherein said liquid connector assembly defines a differential pressure bypass pathway portion, which is controlled by a one-way valve and which permits liquid flow from said liquid inlet pathway portion to said liquid outlet pathway portion when a pressure differential thereacross reaches a predetermined threshold, which indicates the existence of a blockage in a liquid path through said liquid heating chamber accommodating volume.

147. A heated liquid discharge system according to claim 146 and wherein said liquid inlet pathway portion comprises a leaky one way valve which permits supply of liquid under pressure to said liquid heating chamber accommodating volume but restricts backflow therethrough to a relatively slow rate.

148. A heated liquid discharge system according to claim 147 and wherein said liquid passes through said liquid inlet channel, fills said liquid heating chamber accommodating volume and flows into said liquid heating chamber via said first and second apertures.

5

149. A heated liquid discharge system according to claim 148 and wherein said liquid is heated in said liquid heating chamber and a temperature of said liquid or of air overlying said liquid, depending on the liquid level of said liquid, is sensed by at least one temperature sensor.

10

150. A heated liquid discharge system according to claim 149 and wherein said at least one temperature sensor is mounted onto a printed circuit board which is mounted within said principal housing portion and located outside of said liquid heating chamber accommodating volume.

15

151. A heated liquid discharge system according to any of the preceding claims 128 - 150 and also comprising control circuitry, for operation of said main assembly, which is connected to said at least one temperature sensor.

20

152. A heated liquid discharge system according to any of the preceding claims 128 - 151 and also comprising an overheating cut-off fuse for shutting off electrical power to at least part of said main assembly in the event of overheating of said liquid heating chamber.

25

153. A heated liquid discharge system according to claim 152 and wherein said fuse is formed with an undersurface of a resilient material and is retained in tight thermal engagement with the underside of a base of said liquid heating element.

154.

30

A heated liquid discharge system according to any of the preceding claims 128 - 153 and wherein said liquid drain aperture together with said leaky one-way valve provides both overheating and anti-freezing protection for said main assembly.

155. A heated liquid discharge system according to claim 154 and wherein when said liquid is not being pumped into said liquid heating chamber, said liquid tends to drain slowly from said liquid heating chamber via said leaky one-way valve until a
5 level of liquid in said liquid heating chamber reaches said level of said liquid drain aperture, at which point air, rather than liquid is drawn into said liquid outflow conduit, effectively terminating drainage and retaining liquid inside said liquid heating chamber accommodating volume generally at said level of said liquid drain aperture.

10 156. A heated liquid discharge system according to claim 155 and wherein retention of liquid inside said liquid heating chamber at a level generally not lower than that of said liquid drain aperture ensures that said level of liquid in said liquid heating chamber at least covers most of said heating elements located therein, ensuring rapid heating of said liquid and avoiding burning out of said heating elements due to lack of
15 said liquid in the vicinity thereof and retention of said liquid inside said liquid heating chamber at a level no higher than that of said liquid drain aperture ensures that sufficient freezing expansion volume is provided so that when the vehicle is not being operated and is in a freezing environment, freezing of said liquid therein does not cause cracking of said liquid heating chamber.

20 157. A heated liquid discharge system comprising:
a main assembly which provides liquid heating and includes electrical and liquid flow control functionalities;
a liquid inflow conduit supplying liquid from a liquid reservoir to said
25 main assembly; and
a liquid outflow conduit supplying liquid to at least one sprayer located at at least one location on a motor vehicle,
said main assembly comprising a liquid heating chamber and an electrical circuit board having mounted thereon a liquid temperature sensor which
30 senses temperature of said liquid in said liquid heating chamber.

158. A heated liquid discharge system according to claim 157 and wherein said main assembly comprises a liquid heating chamber communicating with said liquid inflow conduit and said liquid outflow conduit and being formed with a liquid drain aperture located on a side thereof which permits draining of liquid from said liquid heating chamber generally down to level of said liquid drain aperture via said leaky one-way valve.

159. A heated liquid discharge system according to claim 158 and wherein said draining takes place when a vehicle pump supplying liquid to said liquid inflow conduit is not in operation.

160. A heated liquid discharge system according to any of the preceding claims 157 - 159 and wherein said at least one location includes at least one of the following locations:

front vehicle windshield, back vehicle windshield, side vehicle windows, vehicle headlights, vehicle rear lights and vehicle exterior mirrors.

161. A heated liquid discharge system according to any of the preceding claims 157 - 160 and wherein a vehicle operator actuation switch is electrically coupled to said main assembly.

162. A heated liquid discharge system according to any of the preceding claims 157 - 161 and wherein said main assembly is connected to a vehicle computer.

163. A heated liquid discharge system according to any of the preceding claims 157 - 162 and wherein said main assembly is connected to a vehicle ignition switch.

164. A heated liquid discharge system according to any of the preceding claims 157 - 163 and wherein said main assembly comprises a principal housing portion and a cover housing portion.

165. A heated liquid discharge system according to claim 164 and wherein said principal housing portion defines a generally circular cylindrical liquid heating chamber accommodating volume in a major portion of which is disposed a liquid heating assembly including said liquid heating chamber.

5

166. A heated liquid discharge system according to any of the preceding claims 157 - 165 and wherein said liquid heating chamber comprises a generally circular cylindrical outer sleeve.

10 167. A heated liquid discharge system according to any of the preceding claims 157 - 166 and wherein said liquid heating assembly comprises a plurality of heating elements located within said liquid heating chamber.

15 168. A heated liquid discharge system according to claim 167 and wherein electrical characteristics of individual ones of said plurality of heating elements are different from each other.

20 169. A heated liquid discharge system according to claim 165 and wherein said principal housing portion defines a liquid inlet channel and a heated liquid outlet channel, both communicating with said liquid heating chamber accommodating volume and respectively communicating with said liquid inflow conduit and said liquid outflow conduit.

25 170. A heated liquid discharge system according to claim 169 and wherein said principal housing portion also defines a heated liquid temperature sensor mounting aperture which communicates with said liquid heating chamber accommodating volume.

30 171. A heated liquid discharge system according to claim 170 and wherein liquid supplied to said liquid heating chamber accommodating volume via said liquid inlet channel enters said liquid heating chamber via at least two liquid inlet apertures formed in said liquid heating chamber including a first aperture located near a base of

said liquid heating chamber and a second aperture located at an opposite side of said liquid heating chamber from said first aperture and near a middle of a height of said liquid heating chamber.

5 172. A heated liquid discharge system according to claim 171 and wherein during operation of said vehicle pump supplying liquid to said liquid inflow conduit a level of said liquid exceeds said height of said liquid heating chamber and fills said liquid heating chamber accommodating volume.

10 173. A heated liquid discharge system according to claim 172 and wherein said liquid drain aperture is located on a side of said liquid heating chamber just below the top thereof, which permits draining of said liquid from said liquid heating chamber accommodating volume generally only down to said level of said liquid drain aperture when said vehicle pump is not in operation.

15

174. A heated liquid discharge system according to claim 173 and wherein said liquid from said liquid reservoir is supplied by said vehicle pump via said liquid inlet conduit via a liquid inlet pathway portion of a liquid connector assembly, which also defines a liquid outlet pathway portion.

20

175. A heated liquid discharge system according to claim 174 and wherein said liquid connector assembly defines a differential pressure bypass pathway portion, which is controlled by a one-way valve and which permits liquid flow from said liquid inlet pathway portion to said liquid outlet pathway portion when a pressure differential thereacross reaches a predetermined threshold, which indicates the existence of a blockage in a liquid path through said liquid heating chamber accommodating volume.

25

176. A heated liquid discharge system according to claim 175 and wherein said liquid inlet pathway portion comprises a leaky one way valve which permits supply of liquid under pressure to said liquid heating chamber accommodating volume but restricts backflow therethrough to a relatively slow rate.

30

177. A heated liquid discharge system according to claim 176 and wherein said liquid passes through said liquid inlet channel, fills said liquid heating chamber accommodating volume and flows into said liquid heating chamber via said first and second apertures.

5

178. A heated liquid discharge system according to claim 177 and wherein said liquid is heated in said liquid heating chamber and a temperature of said liquid or of air overlying said liquid, depending on the liquid level of said liquid, is sensed by said liquid temperature sensor.

10

179. A heated liquid discharge system according to claim 158 and wherein said liquid temperature sensor is mounted onto a printed circuit board which is mounted within said principal housing portion and located outside of said liquid heating chamber accommodating volume.

15

180. A heated liquid discharge system according to any of the preceding claims 157 - 179 and also comprising control circuitry, for operation of said main assembly, which is connected to said liquid temperature sensor.

20

181. A heated liquid discharge system according to any of the preceding claims 157 - 180 and also comprising an overheating cut-off fuse for shutting off electrical power to at least part of said main assembly in the event of overheating of said liquid heating chamber.

25

182. A heated liquid discharge system according to claim 181 and wherein said fuse is formed with an undersurface of a resilient material and is retained in tight thermal engagement with the underside of a base of said liquid heating element.

30

183. A heated liquid discharge system according to any of the preceding claims 157 - 182 and wherein said liquid drain aperture together with said leaky one-way valve provides both overheating and anti-freezing protection for said main assembly.

184. A heated liquid discharge system according to claim 183 and wherein when said liquid is not being pumped into said liquid heating chamber, said liquid tends to drain slowly from said liquid heating chamber via said leaky one-way valve until a level of liquid in said liquid heating chamber reaches said level of said liquid drain aperture, at which point air, rather than liquid is drawn into said liquid outflow conduit, effectively terminating drainage and retaining liquid inside said liquid heating chamber accommodating volume generally at said level of said liquid drain aperture.

185. A heated liquid discharge system according to claim 184 and wherein retention of liquid inside said liquid heating chamber at a level generally not lower than that of said liquid drain aperture ensures that said level of liquid in said liquid heating chamber at least covers most of said heating elements located therein, ensuring rapid heating of said liquid and avoiding burning out of said heating elements due to lack of said liquid in the vicinity thereof and retention of said liquid inside said liquid heating chamber at a level no higher than that of said liquid drain aperture ensures that sufficient freezing expansion volume is provided so that when the vehicle is not being operated and is in a freezing environment, freezing of said liquid therein does not cause cracking of said liquid heating chamber.

186. A heated liquid discharge method comprising:
supplying liquid from a liquid reservoir to a liquid heating chamber comprised in a main assembly ;
heating said liquid in said liquid heating chamber;
supplying heated liquid from said liquid heating chamber to at least one sprayer located at at least one location on a motor vehicle; and
draining of liquid to said liquid reservoir from said liquid heating chamber generally down to a predetermined level in said liquid heating chamber.

187. A heated liquid discharge method according to claim 186 and wherein said supplying liquid from a liquid reservoir to a liquid heating chamber is via a liquid inflow conduit and said supplying heated liquid from said liquid heating chamber to

said at least one sprayer located at at least one location on a motor vehicle is via a liquid outflow conduit.

188. A heated liquid discharge method according to claim 186 or claim 187
5 and wherein said draining is via a liquid drain aperture located on a side of said liquid heating chamber.

189. A heated liquid discharge method according to claim 188 and wherein
10 said draining takes place when a vehicle pump supplying liquid to said liquid inflow conduit is not in operation.

190. A heated liquid discharge method according to claim 186 and wherein
said at least one location includes at least one of the following locations:

15 front vehicle windshield, back vehicle windshield, side vehicle windows
vehicle headlights, vehicle rear lights and vehicle exterior mirrors.

191. A heated liquid discharge method according to any of the preceding
claims 186 - 190 and also comprising electrically coupling a vehicle operator actuation
20 switch to said main assembly.

192. A heated liquid discharge method according to any of the preceding
claims 186 - 191 and also comprising connecting said main assembly to a vehicle
computer.

25 193. A heated liquid discharge method according to any of the preceding
~~claims~~ 186 - 192 and also comprising connecting said main assembly to a vehicle
ignition switch.

194. A heated liquid discharge method according to any of the preceding
30 claims 186 - 193 and wherein said heating said liquid in said liquid heating chamber is
provided by a plurality of heating elements located within said liquid heating chamber.

195. A heated liquid discharge method according to claim 194 and wherein electrical characteristics of individual ones of said plurality of heating elements are different from each other.

5 196. A heated liquid discharge method according to claim 186 and wherein said liquid flows to said liquid heating chamber via a liquid inlet channel and enters said liquid heating chamber via at least two liquid inlet apertures formed in said liquid heating chamber including a first aperture located near a base of said liquid heating chamber and a second aperture located at an opposite side of said liquid heating
10 chamber from said first aperture and near a middle of a height of said liquid heating chamber.

197. A heated liquid discharge method according to claim 196 and wherein during operation of said vehicle pump supplying liquid to said liquid inflow conduit a
15 level of said liquid exceeds said height of said liquid heating chamber and fills a liquid heating chamber accommodating volume defined within said liquid heating chamber.

198. A heated liquid discharge method according to claim 197 and wherein said liquid drain aperture is located on a side of said liquid heating chamber just below
20 the top thereof, which permits said draining of said liquid from said liquid heating chamber accommodating volume generally only down to said level of said liquid drain aperture when said vehicle pump is not in operation.

199. A heated liquid discharge method according to claim 198 and wherein
25 said liquid from said liquid reservoir is supplied by said vehicle pump via said liquid inlet conduit via a liquid inlet pathway portion of a liquid connector assembly, which also defines a liquid outlet pathway portion.

200. A heated liquid discharge method according to claim 199 and also
30 comprising controlling a differential pressure bypass pathway portion defined within a liquid connector assembly by a one-way valve, said one-way valve permits liquid flow from said liquid inlet pathway portion to said liquid outlet pathway portion when a

pressure differential thereacross reaches a predetermined threshold, which indicates the existence of a blockage in a liquid path through said liquid heating chamber accommodating volume.

5 201. A heated liquid discharge method according to claim 200 and also comprising permitting supply of liquid under pressure to said liquid heating chamber accommodating volume but restricting backflow therethrough to a relatively slow rate.

10 202. A heated liquid discharge method according to claim 196 and wherein said liquid passes through said liquid inlet channel, fills said liquid heating chamber accommodating volume and flows into said liquid heating chamber via said first and second apertures.

15 203. A heated liquid discharge method according to any of the preceding claims 186 – 202 and also comprising sensing a temperature of said liquid in said liquid heating chamber or of air overlying said liquid, depending on the liquid level of said liquid, by at least one temperature sensor.

20 204. A heated liquid discharge method according to claim 203 and also comprising operating said main assembly by a control circuitry, for operation of said main assembly, which is connected to said at least one temperature sensor.

25 205. A heated liquid discharge method according to any of the preceding claims 186 - 204 and also comprising shutting off electrical power to at least part of said main assembly in the event of overheating of said liquid heating chamber by an overheating cut-off fuse.

30 206. A heated liquid discharge method according to claim 205 and wherein said fuse is formed with an undersurface of a resilient material and is retained in tight thermal engagement with the underside of a base of said liquid heating element.

207. A heated liquid discharge method according to any of the preceding claims 197 - 206 and also comprising providing both overheating and anti-freezing protection for said main assembly by said liquid drain aperture together with a leaky one-way valve.

5

208. A heated liquid discharge method according to claim 207 and wherein when said liquid is not being pumped into said liquid heating chamber, said liquid tends to drain slowly from said liquid heating chamber via said leaky one-way valve until a level of liquid in said liquid heating chamber reaches a level of said liquid drain aperture, at which point air, rather than liquid is drawn into said liquid outflow conduit, effectively terminating drainage and retaining liquid inside said liquid heating chamber accommodating volume generally at said level of said liquid drain aperture.

10

209. A heated liquid discharge method according to claim 208 and wherein retention of liquid inside said liquid heating chamber at a level generally not lower than that of said liquid drain aperture ensures that said level of liquid in said liquid heating chamber at least covers most of said heating elements located therein, ensuring rapid heating of said liquid and avoiding burning out of said heating elements due to lack of said liquid in the vicinity thereof and retention of said liquid inside said liquid heating chamber at a level no higher than that of said liquid drain aperture ensures that sufficient freezing expansion volume is provided so that when the vehicle is not being operated and is in a freezing environment, freezing of said liquid therein does not cause cracking of said liquid heating chamber.

15

20

25 210. A heated liquid discharge method comprising:
supplying liquid from a liquid reservoir to a liquid heating chamber;
heating said liquid in said liquid heating chamber;
supplying heated liquid from said liquid heating chamber to at least one
sprayer located at at least one location on a motor vehicle; and
30 draining of liquid to said liquid reservoir from said liquid heating
chamber via a leaky one-way valve.

211. A heated liquid discharge method according to claim 210 and wherein said supplying liquid from a liquid reservoir to a liquid heating chamber is via a liquid inflow conduit and said supplying heated liquid from said liquid heating chamber to said at least one sprayer located at at least one location on a motor vehicle is via a liquid outflow conduit.

212. A heated liquid discharge method according to claim 210 or claim 211 and wherein said draining is via a liquid drain aperture located on a side of said liquid heating chamber.

213. A heated liquid discharge method according to claim 212 and wherein said draining takes place when a vehicle pump supplying liquid to said liquid inflow conduit is not in operation.

214. A heated liquid discharge method according to any of the preceding claims 210 - 213 and wherein said at least one location includes at least one of the following locations:

front vehicle windshield, back vehicle windshield, side vehicle windows, vehicle headlights, vehicle rear lights and vehicle exterior mirrors.

215. A heated liquid discharge method according to any of the preceding claims 210 - 214 and also comprising electrically coupling a vehicle operator actuation switch to said main assembly.

216. A heated liquid discharge method according to any of the preceding claims 210 - 215 and also comprising connecting said main assembly to a vehicle computer.

217. A heated liquid discharge method according to any of the preceding claims 210 - 216 and also comprising connecting said main assembly to a vehicle ignition switch.

218. A heated liquid discharge method according to any of the preceding claims 210 - 217 and wherein said heating said liquid in said liquid heating chamber is provided by a plurality of heating elements located within said liquid heating chamber.

5 219. A heated liquid discharge method according to claim 218 and wherein electrical characteristics of individual ones of said plurality of heating elements are different from each other.

220. A heated liquid discharge method according to claim 210 and wherein
10 said liquid flows to said liquid heating chamber via a liquid inlet channel and enters said liquid heating chamber via at least two liquid inlet apertures formed in said liquid heating chamber including a first aperture located near a base of said liquid heating chamber and a second aperture located at an opposite side of said liquid heating chamber from said first aperture and near a middle of a height of said liquid heating
15 chamber.

221. A heated liquid discharge method according to claim 220 and wherein during operation of said vehicle pump supplying liquid to said liquid inflow conduit a level of said liquid exceeds said height of said liquid heating chamber and fills a liquid
20 heating chamber accommodating volume defined within said liquid heating chamber.

222. A heated liquid discharge method according to claim 221 and wherein said liquid drain aperture is located on a side of said liquid heating chamber just below the top thereof, which permits said draining of said liquid from said liquid heating
25 chamber accommodating volume generally only down to said level of said liquid drain aperture when said vehicle pump is not in operation.

223. A heated liquid discharge method according to claim 222 and wherein said liquid from said liquid reservoir is supplied by said vehicle pump via said liquid
30 inlet conduit via a liquid inlet pathway portion of a liquid connector assembly, which also defines a liquid outlet pathway portion.

224. A heated liquid discharge method according to claim 223 and also comprising controlling a differential pressure bypass pathway portion defined within a liquid connector assembly by a one-way valve, said one-way valve permits liquid flow from said liquid inlet pathway portion to said liquid outlet pathway portion when a pressure differential thereacross reaches a predetermined threshold, which indicates the existence of a blockage in a liquid path through said liquid heating chamber accommodating volume.

225. A heated liquid discharge method according to claim 224 and also comprising permitting supply of liquid under pressure to said liquid heating chamber accommodating volume but restricting backflow therethrough to a relatively slow rate.

226. A heated liquid discharge method according to claim 220 and wherein said liquid passes through said liquid inlet channel, fills said liquid heating chamber accommodating volume and flows into said liquid heating chamber via said first and second apertures.

227. A heated liquid discharge method according to any of the preceding claims 210 – 226 and also comprising sensing a temperature of said liquid in said liquid heating chamber or of air overlying said liquid, depending on the liquid level of said liquid, by at least one temperature sensor.

228. A heated liquid discharge method according to claim 227 and also comprising operating said main assembly by a control circuitry, for operation of said main assembly, which is connected to said at least one temperature sensor.

229. A heated liquid discharge method according to any of the preceding claims 210 - 228 and also comprising shutting off electrical power to at least part of said main assembly in the event of overheating of said liquid heating chamber by an overheating cut-off fuse.

230. A heated liquid discharge method according to claim 229 and wherein said fuse is formed with an undersurface of a resilient material and is retained in tight thermal engagement with the underside of a base of said liquid heating element.

5 231. A heated liquid discharge method according to any of the preceding claims 212 - 230 and also comprising providing both overheating and anti-freezing protection for said main assembly by said liquid drain aperture together with said leaky one-way valve.

10 232. A heated liquid discharge method according to claim 231 and wherein when said liquid is not being pumped into said liquid heating chamber, said liquid tends to drain slowly from said liquid heating chamber via said leaky one-way valve until a level of liquid in said liquid heating chamber reaches a level of said liquid drain aperture, at which point air, rather than liquid is drawn into said liquid outflow conduit,
15 effectively terminating drainage and retaining liquid inside said liquid heating chamber accommodating volume generally at said level of said liquid drain aperture.

233. A heated liquid discharge method according to claim 232 and wherein retention of liquid inside said liquid heating chamber at a level generally not lower than
20 that of said liquid drain aperture ensures that said level of liquid in said liquid heating chamber at least covers most of said heating elements located therein, ensuring rapid heating of said liquid and avoiding burning out of said heating elements due to lack of said liquid in the vicinity thereof and retention of said liquid inside said liquid heating chamber at a level no higher than that of said liquid drain aperture ensures that
25 sufficient freezing expansion volume is provided so that when the vehicle is not being operated and is in a freezing environment, freezing of said liquid therein does not cause cracking of said liquid heating chamber.

234. A heated liquid discharge method according to claim 210 and wherein
30 said draining of liquid to said liquid reservoir from said liquid heating chamber takes place generally down to a predetermined level in said liquid heating chamber.

235. A heated liquid discharge method comprising:
supplying liquid from a liquid reservoir to a liquid heating chamber;
heating said liquid in said liquid heating chamber;
supplying heated liquid from said liquid heating chamber to at least one
5 sprayer located at at least one location on a motor vehicle;
sensing a temperature of said heated liquid; and separately
sensing a temperature of said liquid heating chamber.

236. A heated liquid discharge method according to claim 235 and also
10 comprising draining of said liquid to said liquid reservoir from said liquid heating
chamber generally down to a predetermined level in said liquid heating chamber.

237. A heated liquid discharge method according to claim 235 or claim 236
and wherein said supplying liquid from a liquid reservoir to a liquid heating chamber is
15 via a liquid inflow conduit and said supplying heated liquid from said liquid heating
chamber to said at least one sprayer located at at least one location on a motor vehicle is
via a liquid outflow conduit.

238. A heated liquid discharge method according to claim 237 and wherein
20 said draining is via a liquid drain aperture located on a side of said liquid heating
chamber.

239. A heated liquid discharge method according to claim 238 and wherein
said draining takes place when a vehicle pump supplying liquid to said liquid inflow
25 conduit is not in operation.

240. A heated liquid discharge method according to any of the preceding
claims 235 - 239 and wherein said at least one location includes at least one of the
following locations:

30 front vehicle windshield, back vehicle windshield, side vehicle windows
vehicle headlights, vehicle rear lights and vehicle exterior mirrors.

241. A heated liquid discharge method according to any of the preceding claims 235 - 240 and also comprising electrically coupling a vehicle operator actuation switch to said main assembly.

5 242. A heated liquid discharge method according to any of the preceding claims 235 - 241 and also comprising connecting said main assembly to a vehicle computer.

243. A heated liquid discharge method according to any of the preceding
10 claims 235 - 242 and also comprising connecting said main assembly to a vehicle ignition switch.

244. A heated liquid discharge method according to any of the preceding
15 claims 235 - 243 and wherein said heating said liquid in said liquid heating chamber is provided by a plurality of heating elements located within said liquid heating chamber.

245. A heated liquid discharge method according to claim 244 and wherein
electrical characteristics of individual ones of said plurality of heating elements are
different from each other.

20

246. A heated liquid discharge method according to claim 235 and wherein
said liquid flows to said liquid heating chamber via a liquid inlet channel and enters said
liquid heating chamber via at least two liquid inlet apertures formed in said liquid
heating chamber including a first aperture located near a base of said liquid heating
25 chamber and a second aperture located at an opposite side of said liquid heating
chamber from said first aperture and near a middle of a height of said liquid heating
chamber.

247. A heated liquid discharge method according to claim 246 and wherein
30 during operation of said vehicle pump supplying liquid to said liquid inflow conduit a
level of said liquid exceeds said height of said liquid heating chamber and fills a liquid
heating chamber accommodating volume defined within said liquid heating chamber.

248. A heated liquid discharge method according to claim 247 and wherein said liquid drain aperture is located on a side of said liquid heating chamber just below the top thereof, which permits said draining of said liquid from said liquid heating chamber accommodating volume generally only down to said level of said liquid drain aperture when said vehicle pump is not in operation.

249. A heated liquid discharge method according to claim 248 and wherein said liquid from said liquid reservoir is supplied by said vehicle pump via said liquid inlet conduit via a liquid inlet pathway portion of a liquid connector assembly, which also defines a liquid outlet pathway portion.

250. A heated liquid discharge method according to claim 249 and also comprising controlling a differential pressure bypass pathway portion defined within a liquid connector assembly by a one-way valve, said one-way valve permits liquid flow from said liquid inlet pathway portion to said liquid outlet pathway portion when a pressure differential thereacross reaches a predetermined threshold, which indicates the existence of a blockage in a liquid path through said liquid heating chamber accommodating volume.

251. A heated liquid discharge method according to claim 250 and also comprising permitting supply of liquid under pressure to said liquid heating chamber accommodating volume but restricting backflow therethrough to a relatively slow rate.

252. A heated liquid discharge method according to claim 246 and wherein said liquid passes through said liquid inlet channel, fills said liquid heating chamber accommodating volume and flows into said liquid heating chamber via said first and second apertures.

253. A heated liquid discharge method according to any of the preceding claims 235 – 252 and wherein sensing a temperature of said liquid heating chamber or

of air overlying said liquid, depending on the liquid level of said liquid, by at least one temperature sensor.

254. A heated liquid discharge method according to claim 253 and also comprising operating said main assembly by a control circuitry, for operation of said main assembly, which is connected to said at least one temperature sensor.

255. A heated liquid discharge method according to any of the preceding claims 235 - 254 and also comprising shutting off electrical power to at least part of said main assembly in the event of overheating of said liquid heating chamber by an overheating cut-off fuse.

256. A heated liquid discharge method according to claim 255 and wherein said fuse is formed with an undersurface of a resilient material and is retained in tight thermal engagement with the underside of a base of said liquid heating element.


257. A heated liquid discharge method according to any of the preceding claims 238 - 256 and also comprising providing both overheating and anti-freezing protection for said main assembly by said liquid drain aperture together with a leaky one-way valve.

258. A heated liquid discharge method according to claim 257 and wherein when said liquid is not being pumped into said liquid heating chamber, said liquid tends to drain slowly from said liquid heating chamber via said leaky one-way valve until a level of liquid in said liquid heating chamber reaches a level of said liquid drain aperture, at which point air, rather than liquid is drawn into said liquid outflow conduit, effectively terminating drainage and retaining liquid inside said liquid heating chamber accommodating volume generally at said level of said liquid drain aperture.

259. A heated liquid discharge method according to claim 258 and wherein retention of liquid inside said liquid heating chamber at a level generally not lower than that of said liquid drain aperture ensures that said level of liquid in said liquid heating


chamber at least covers most of said heating elements located therein, ensuring rapid heating of said liquid and avoiding burning out of said heating elements due to lack of said liquid in the vicinity thereof and retention of said liquid inside said liquid heating chamber at a level no higher than that of said liquid drain aperture ensures that
5 sufficient freezing expansion volume is provided so that when the vehicle is not being operated and is in a freezing environment, freezing of said liquid therein does not cause cracking of said liquid heating chamber.

1/37

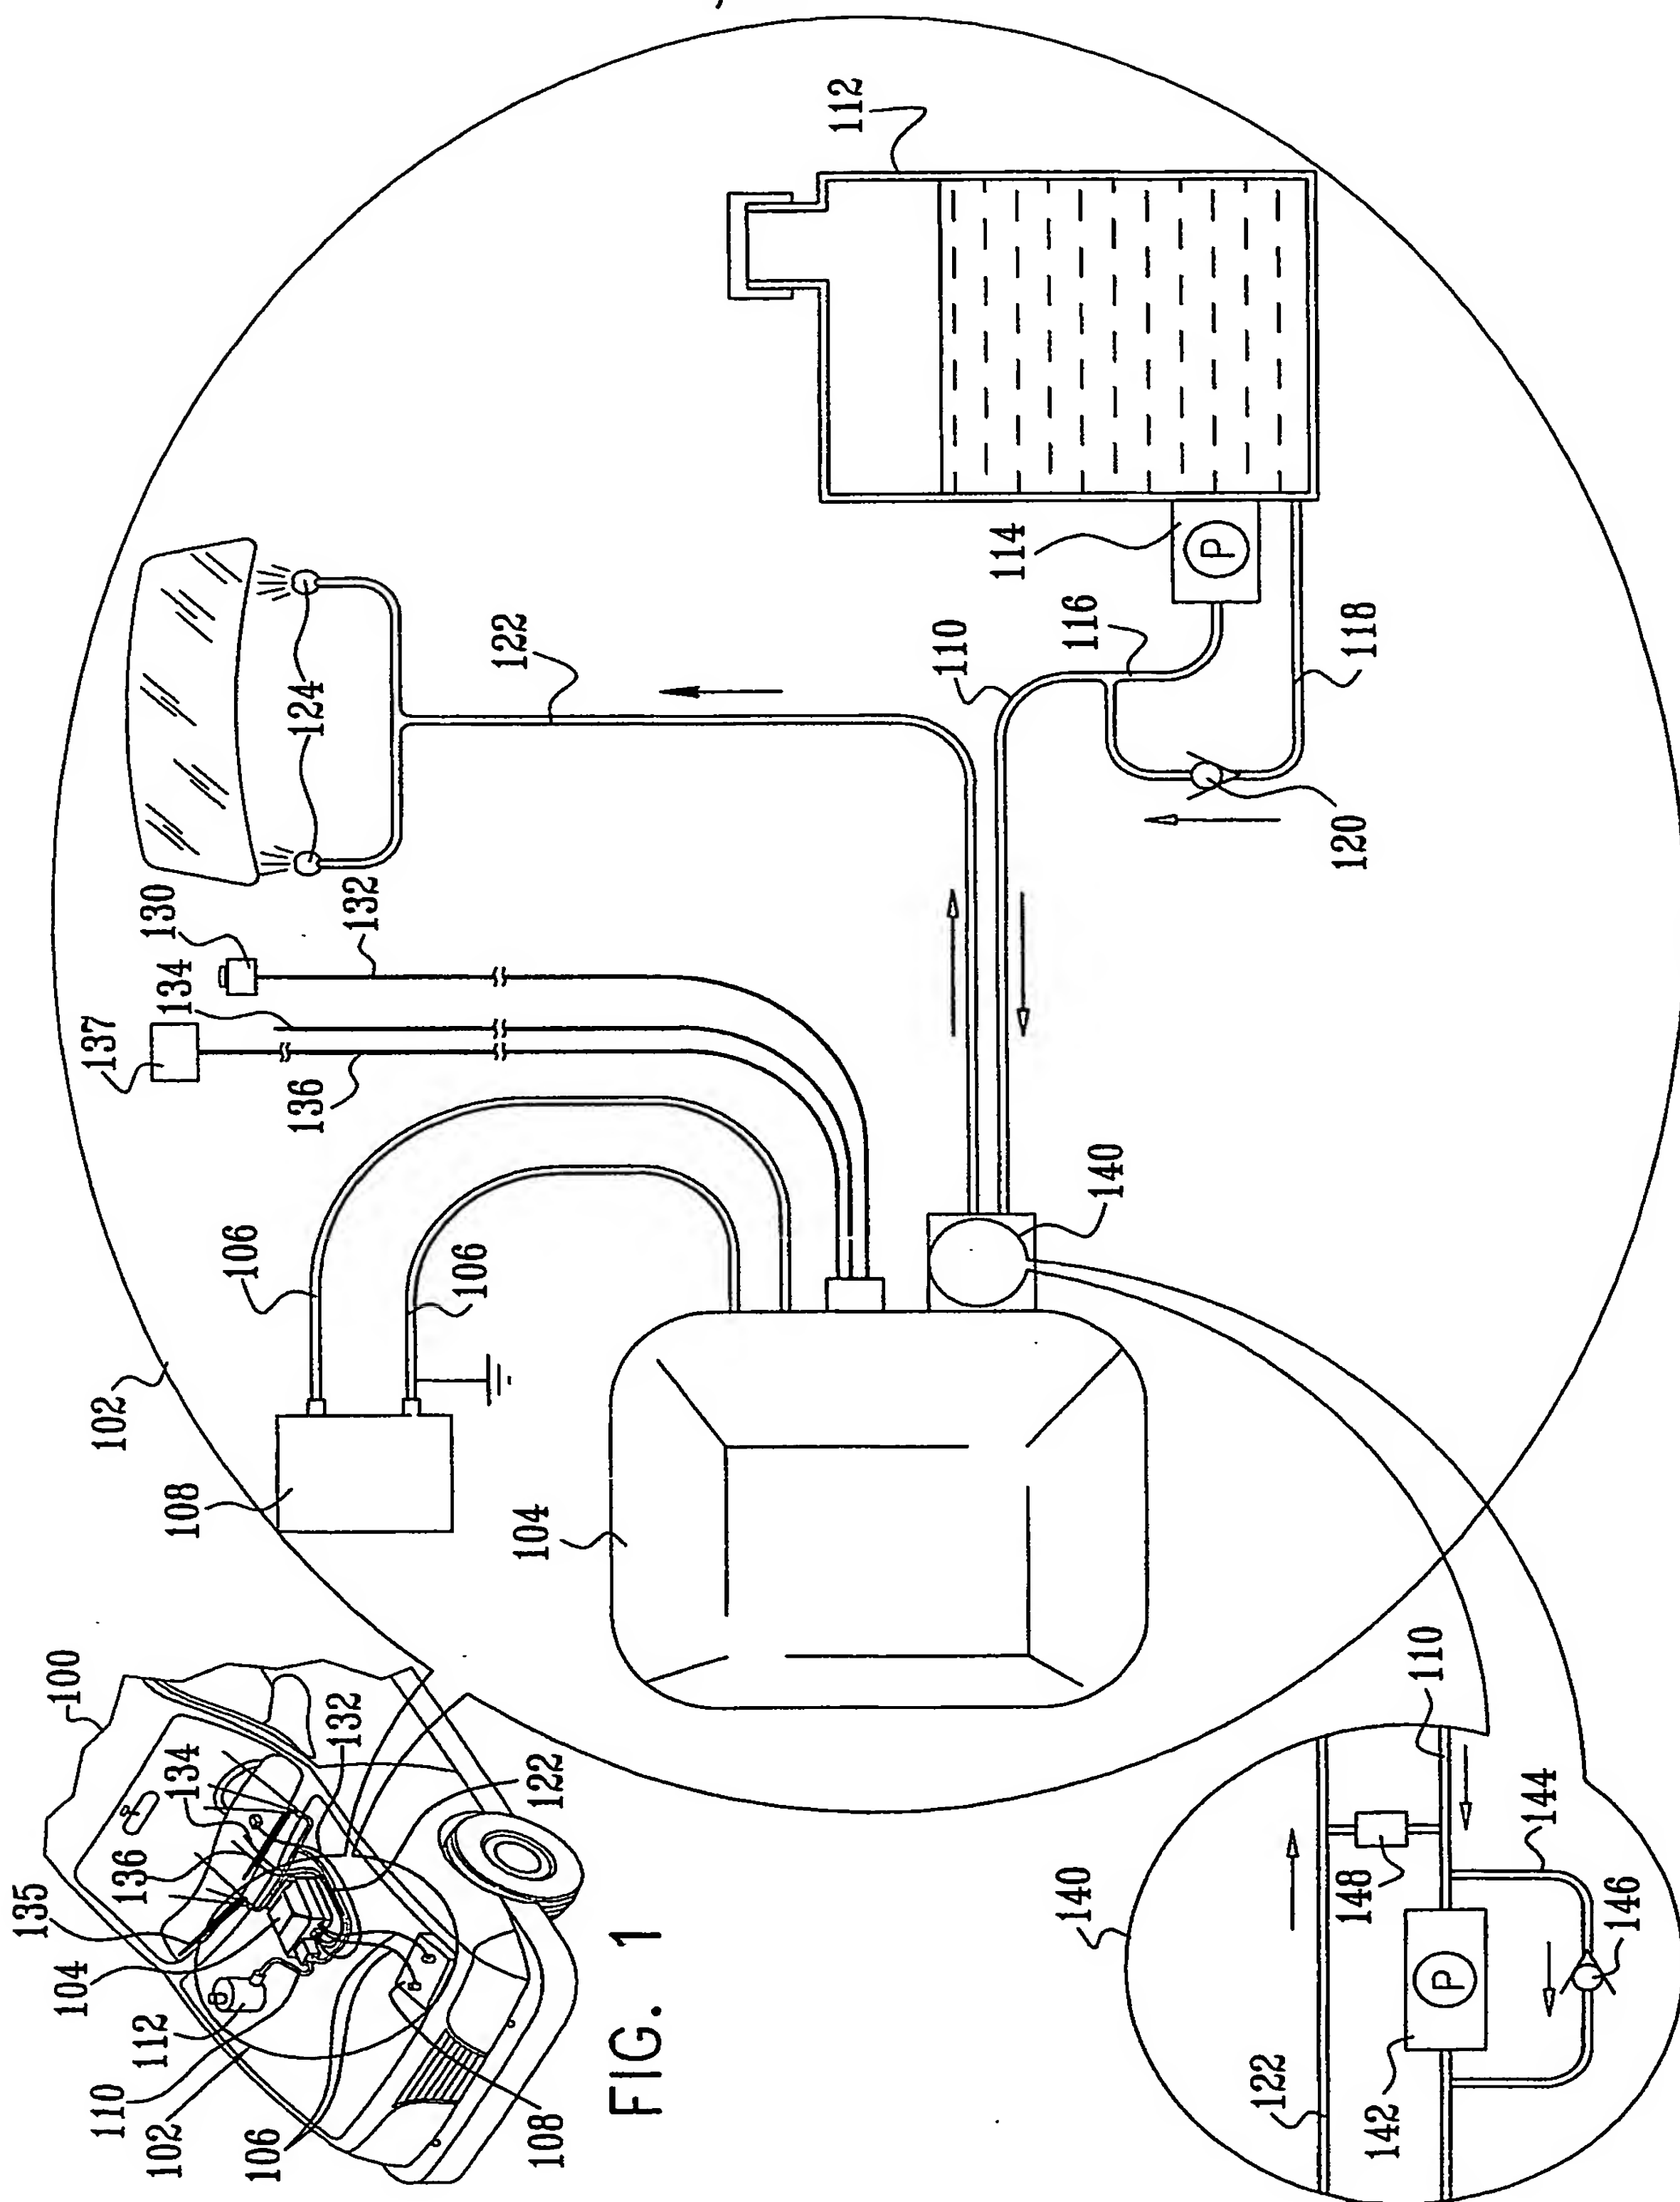


2/37

FIG. 2A

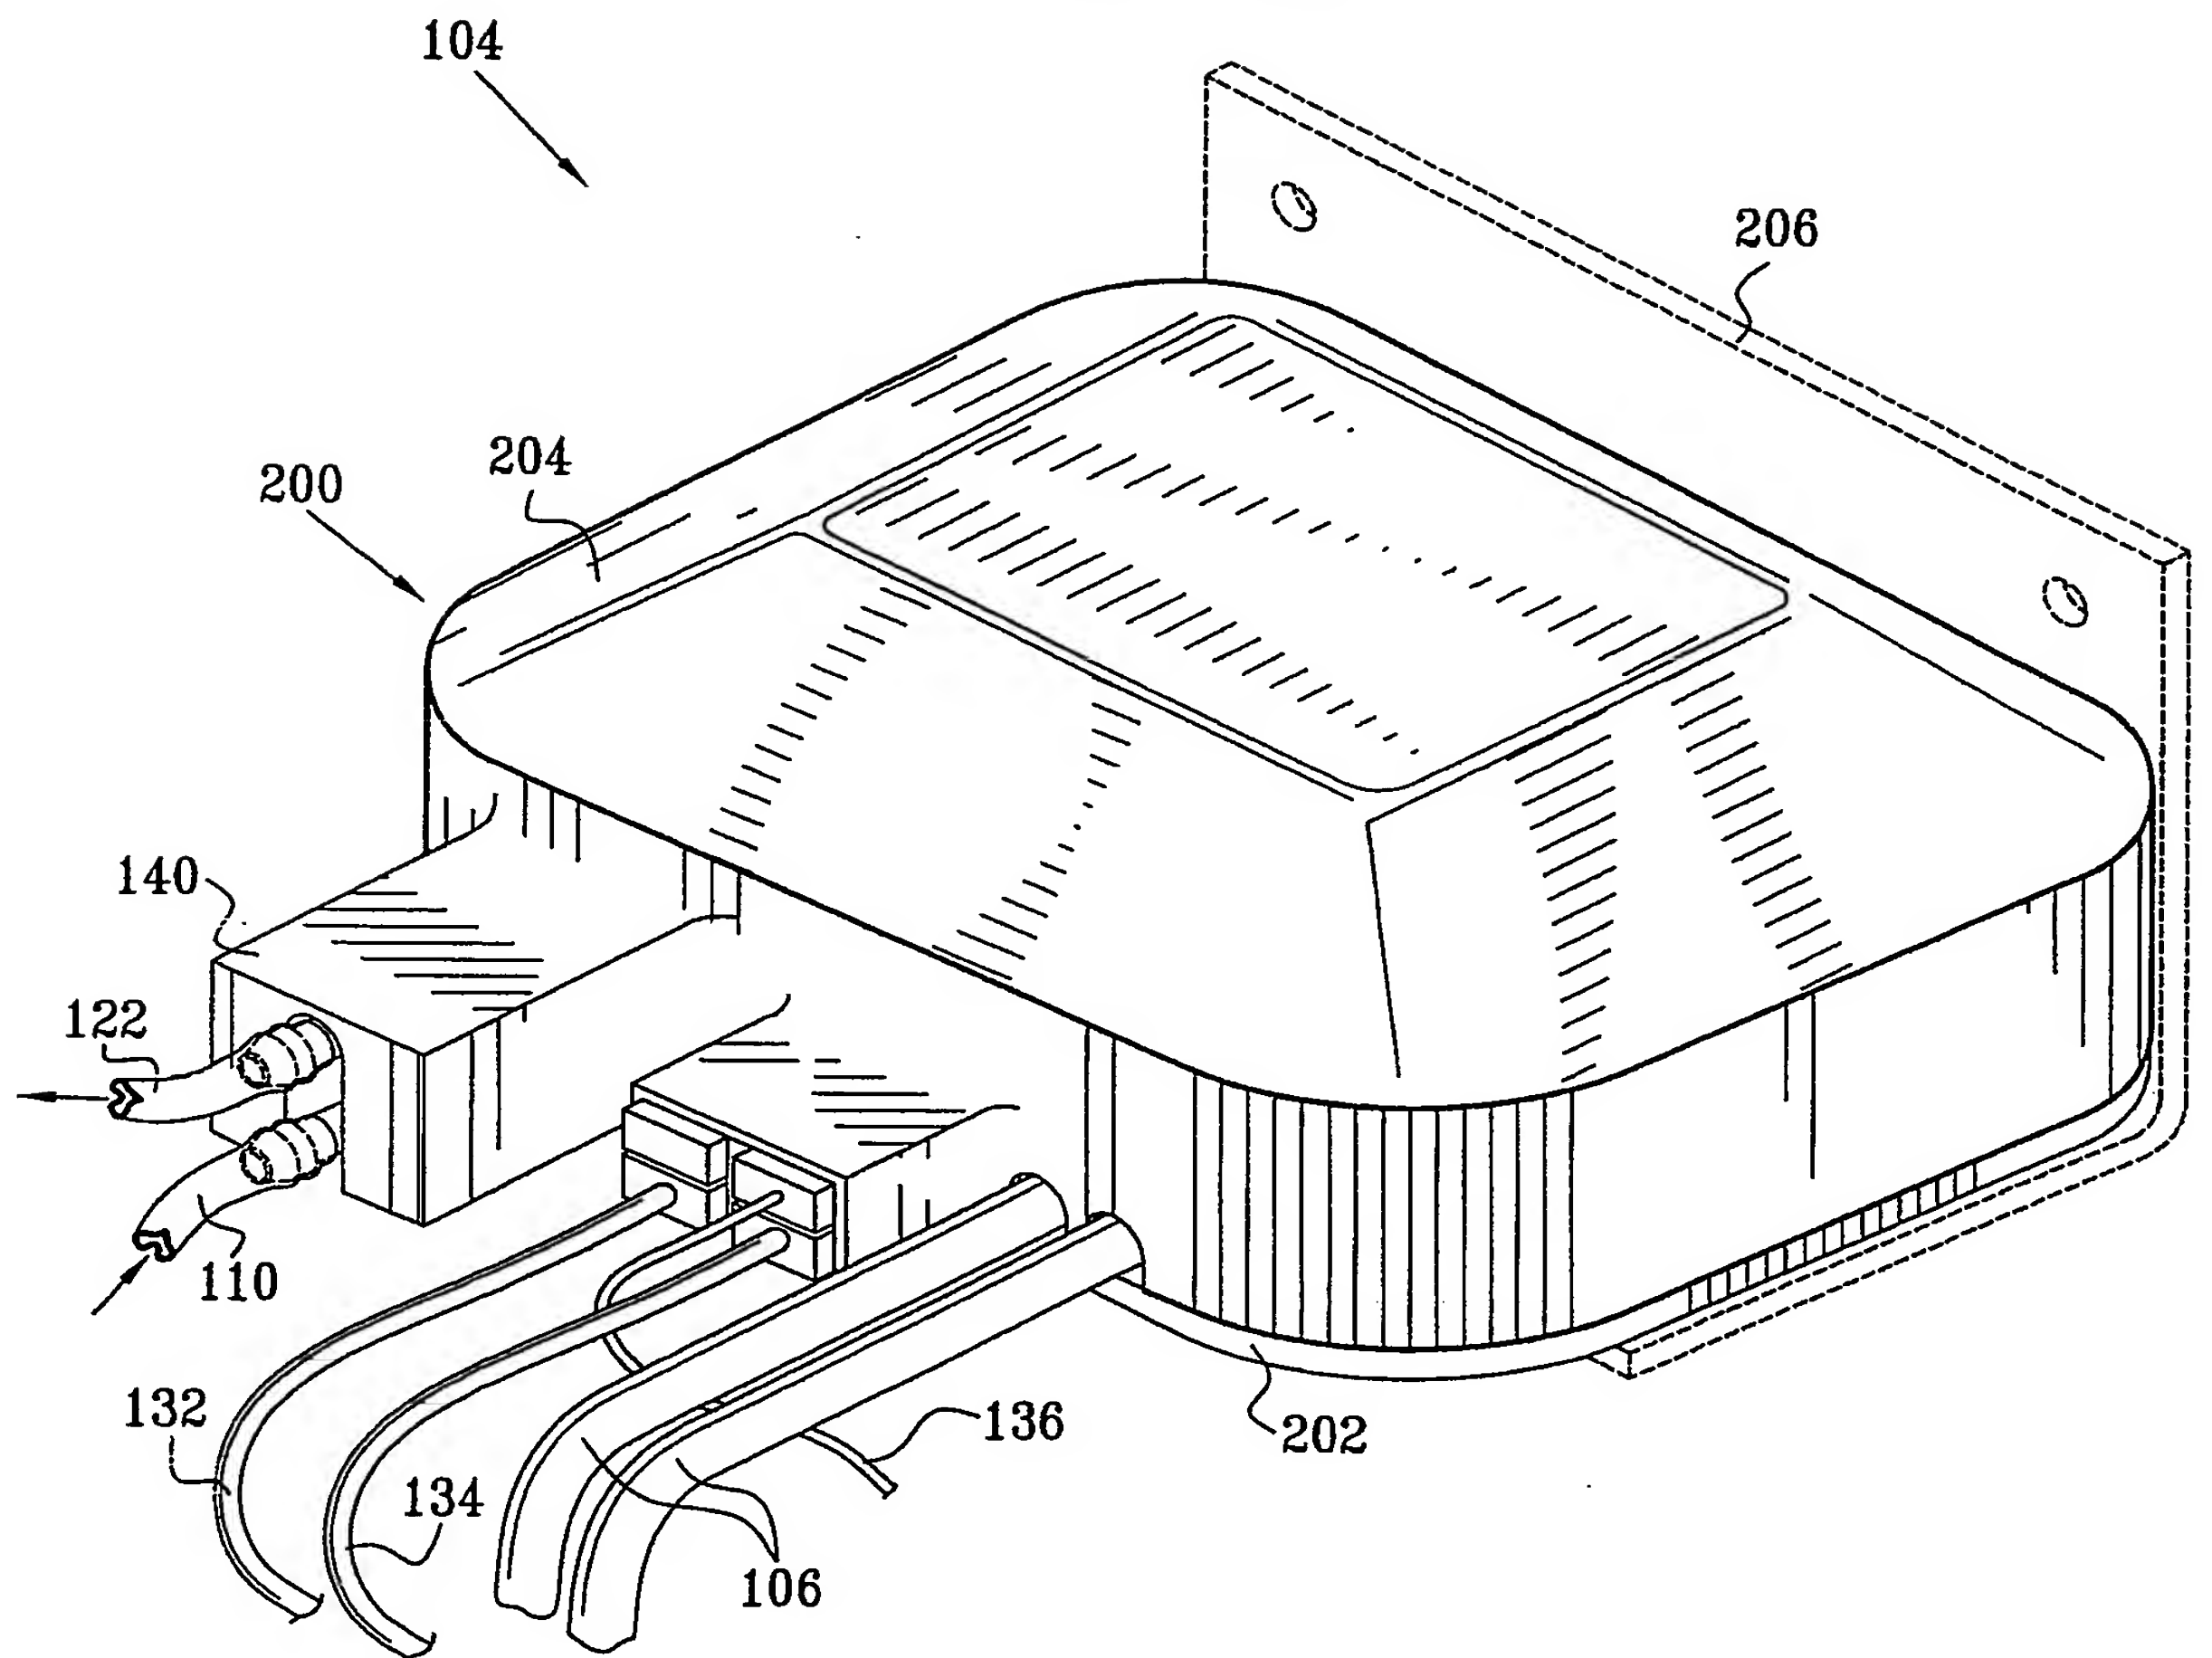


3/37

FIG. 2B

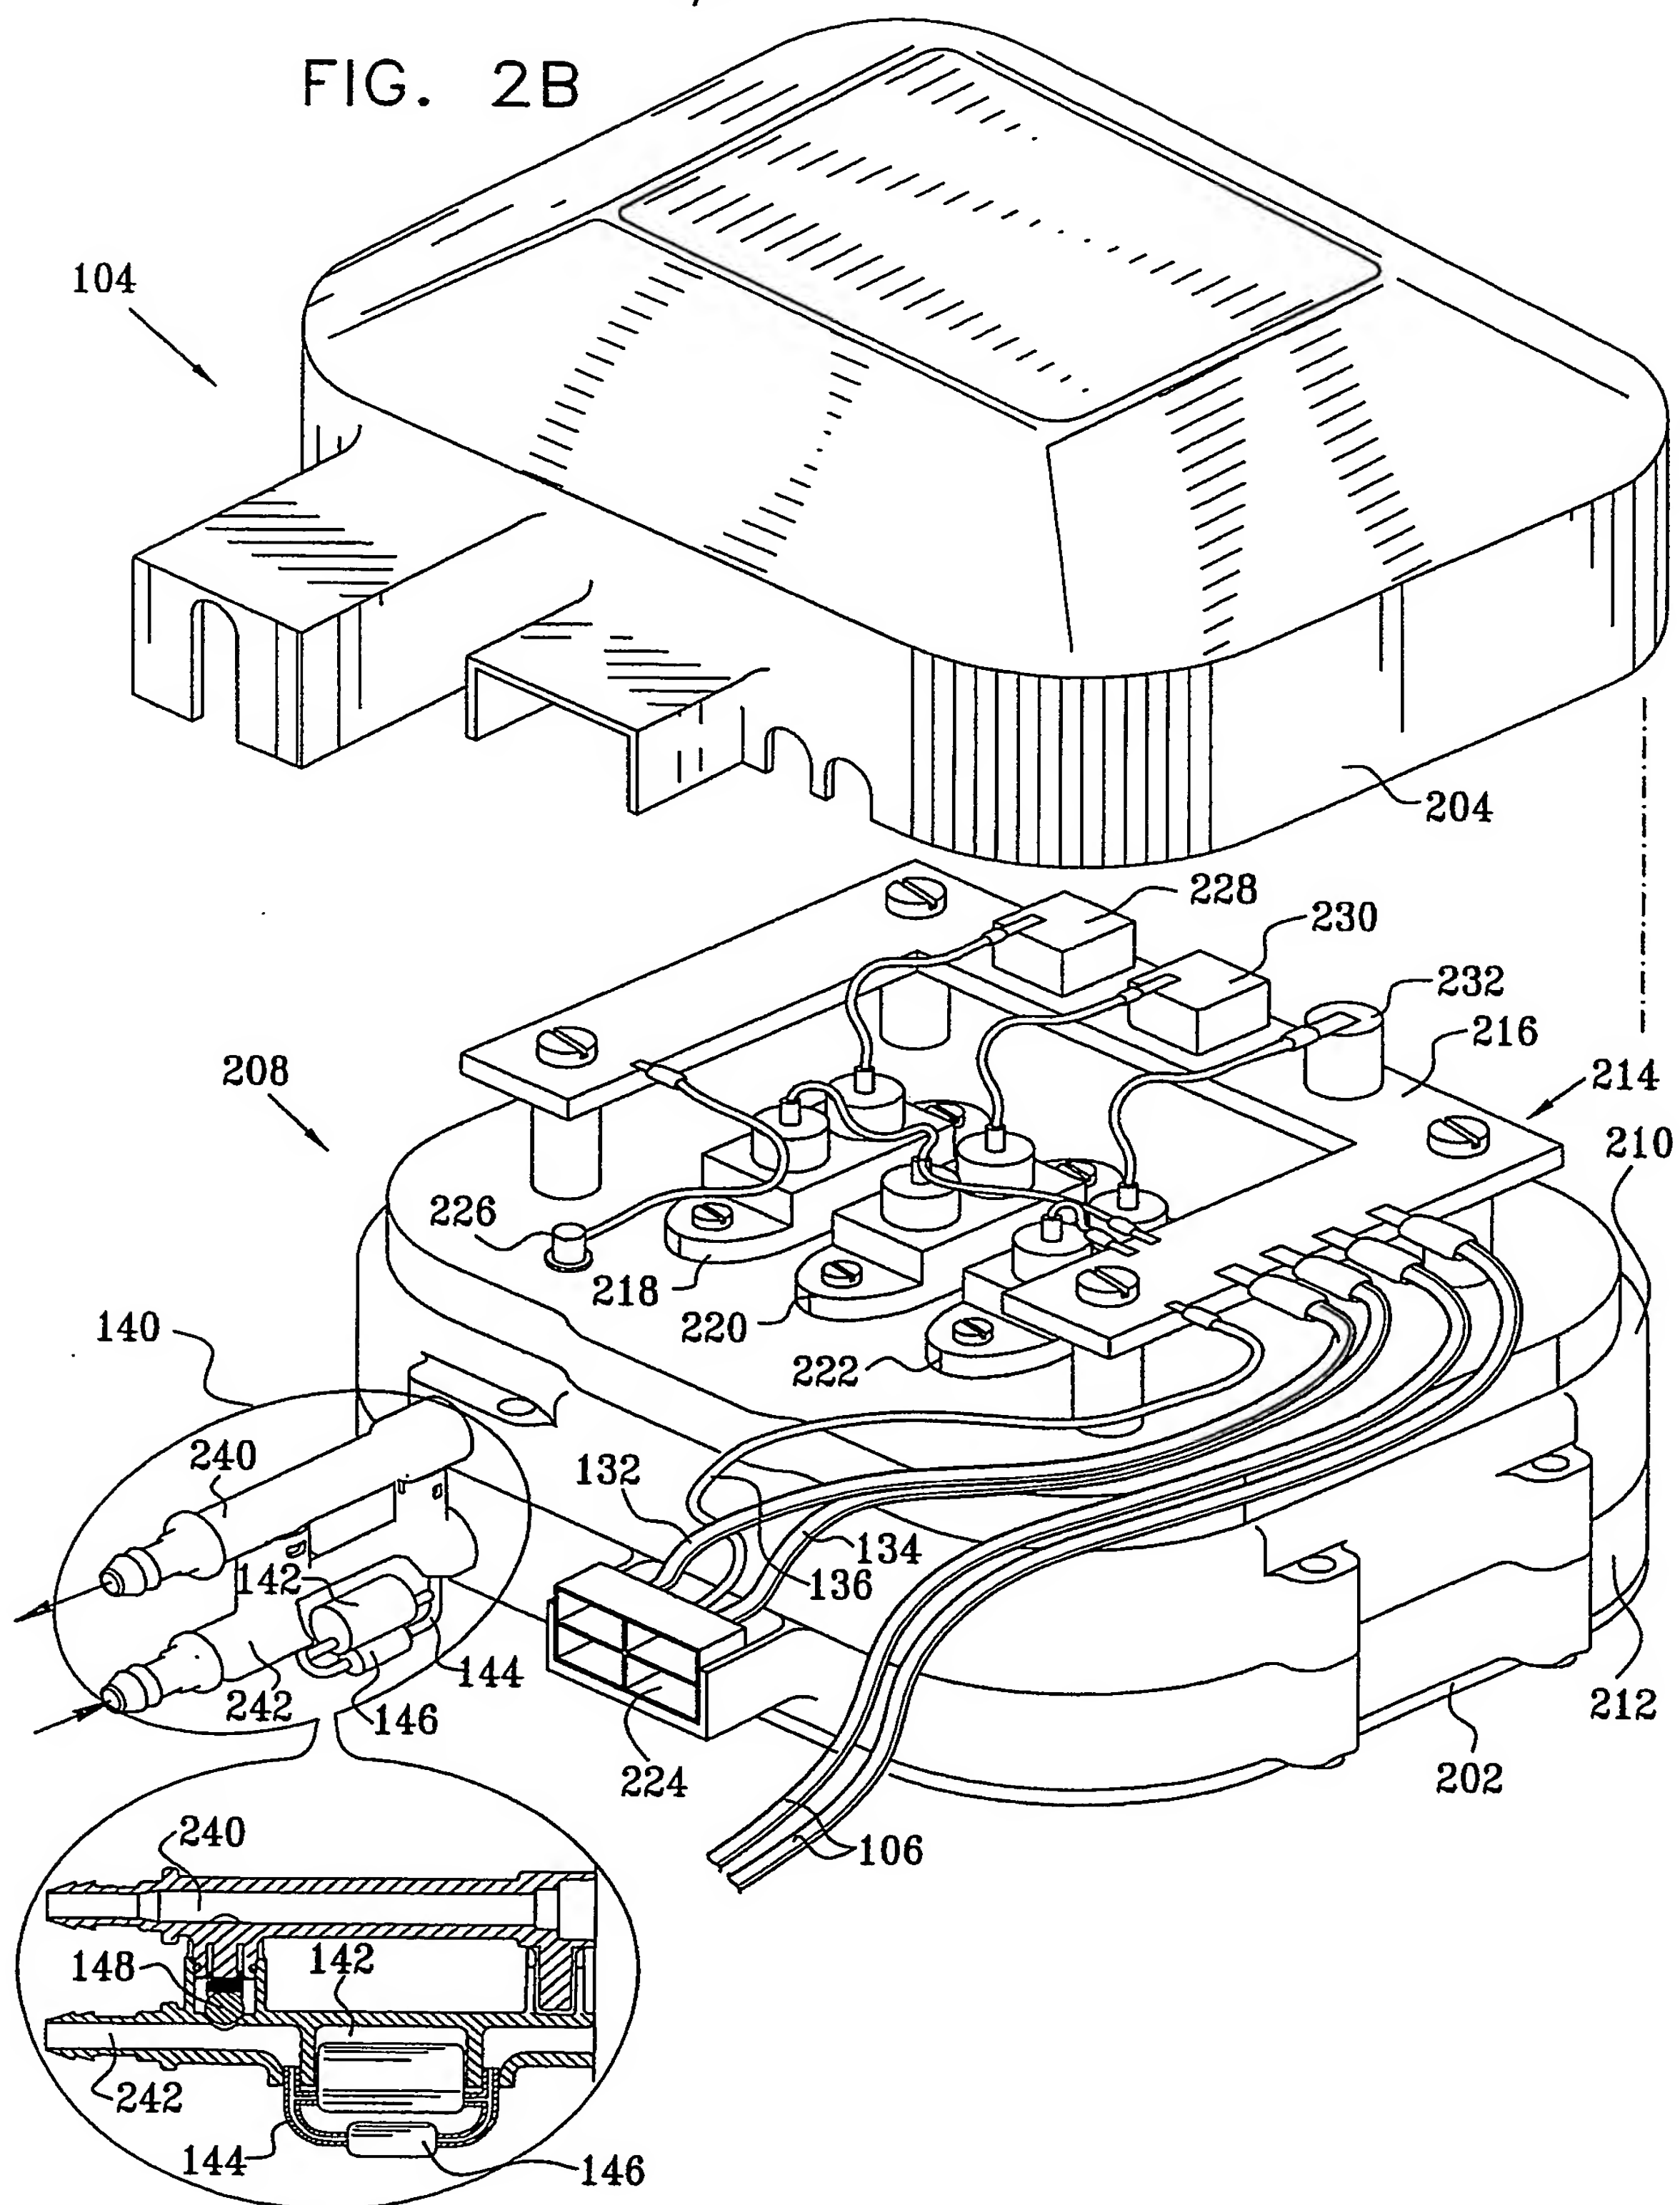

4/37

FIG. 3

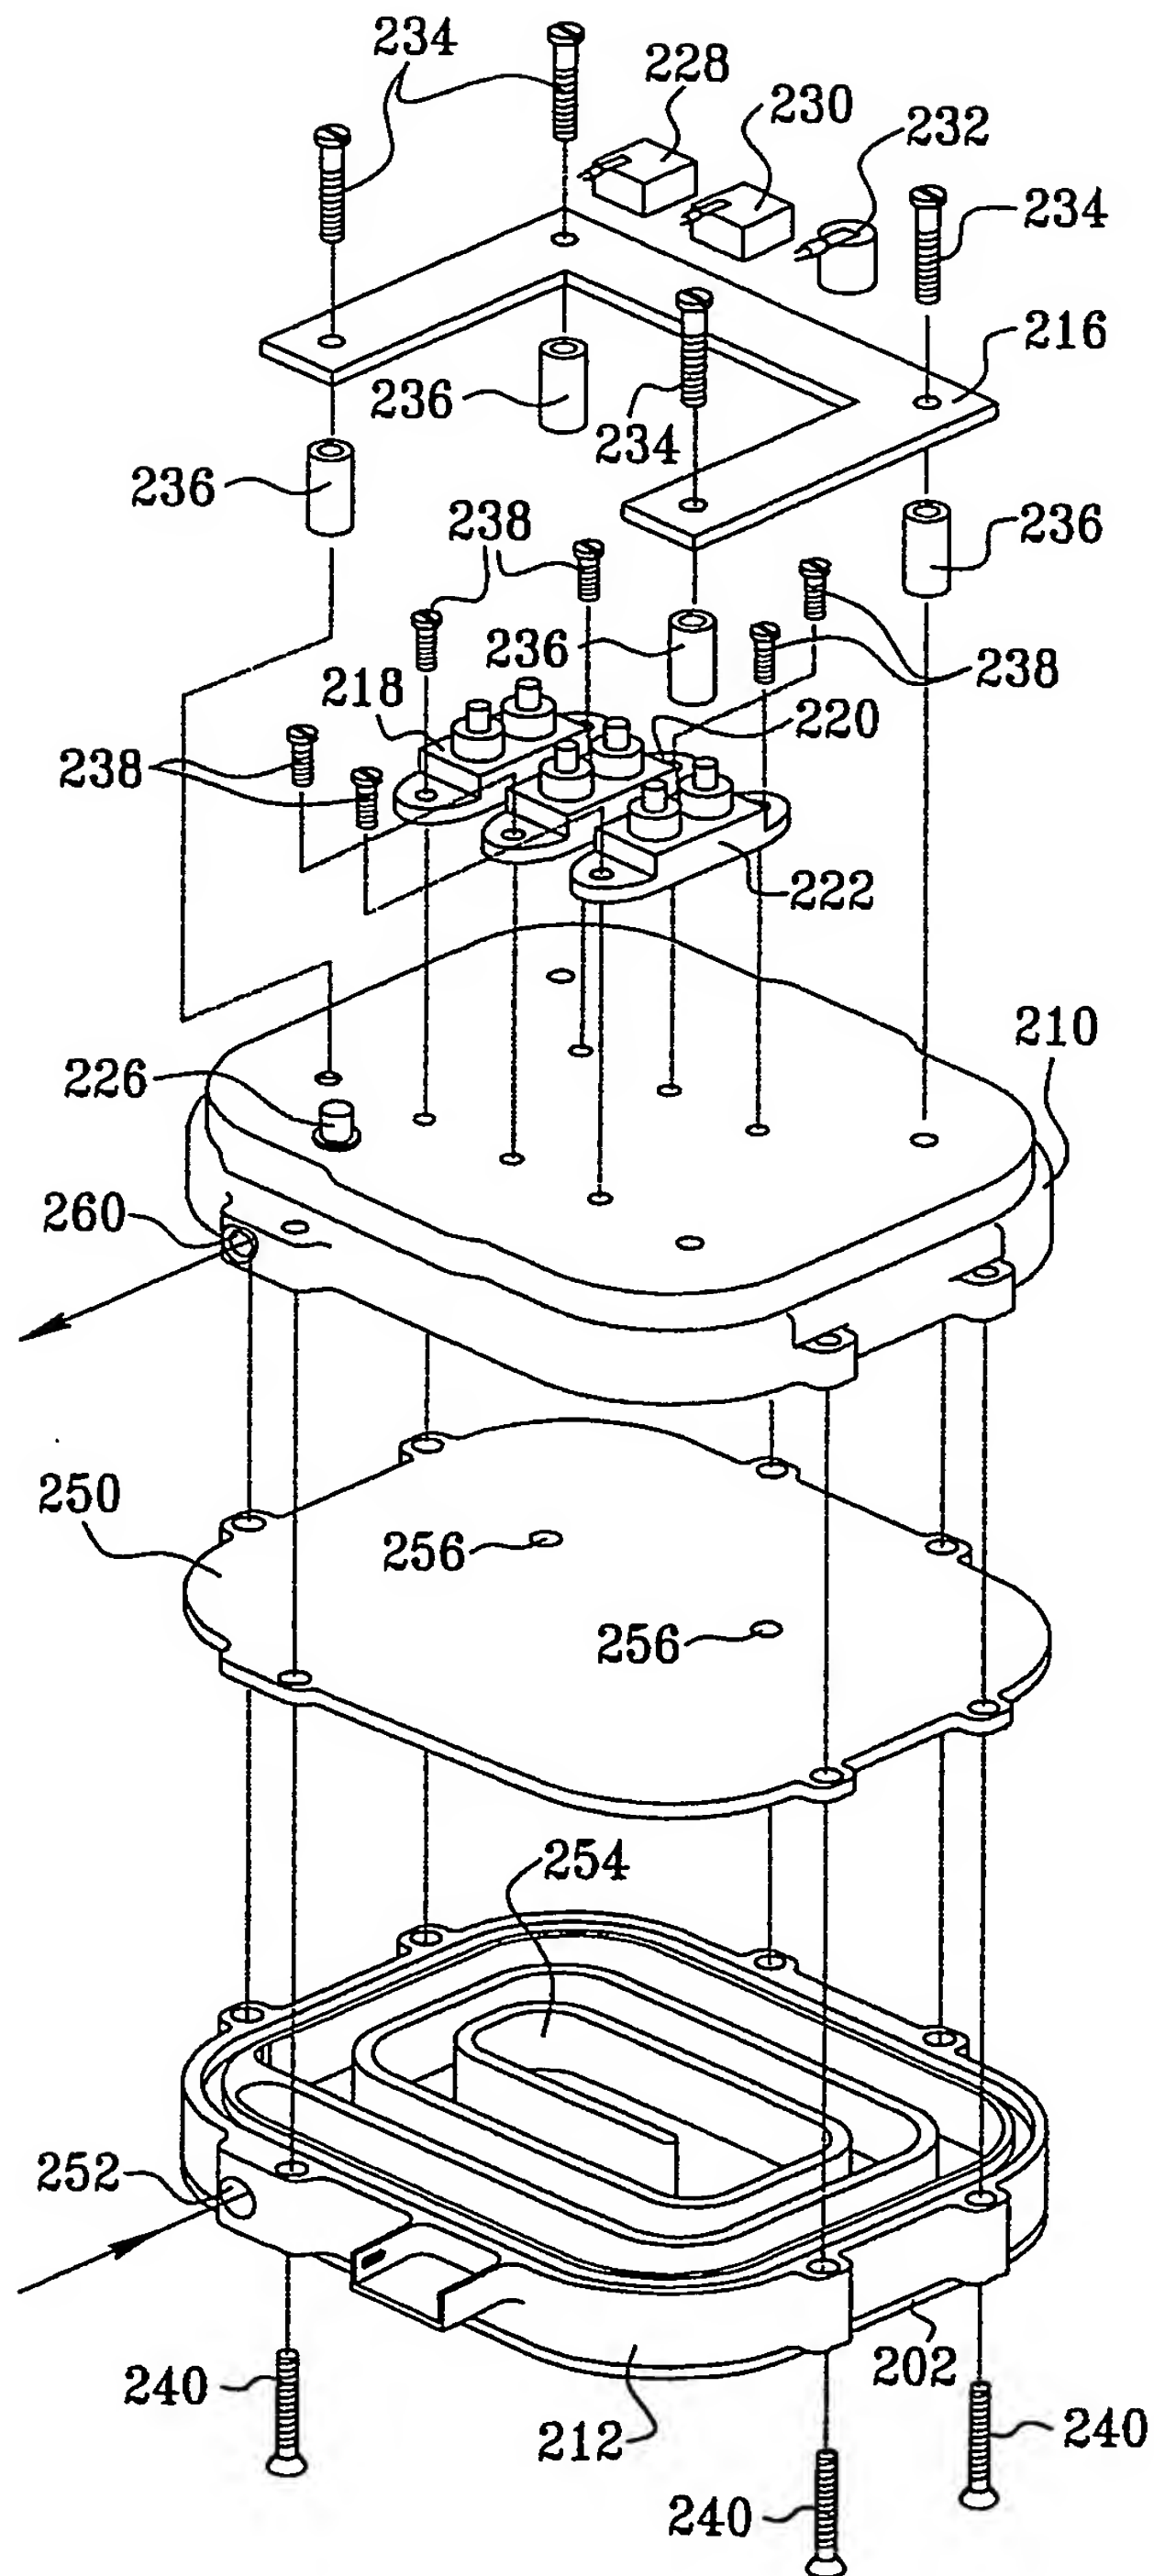

5/37

FIG. 4


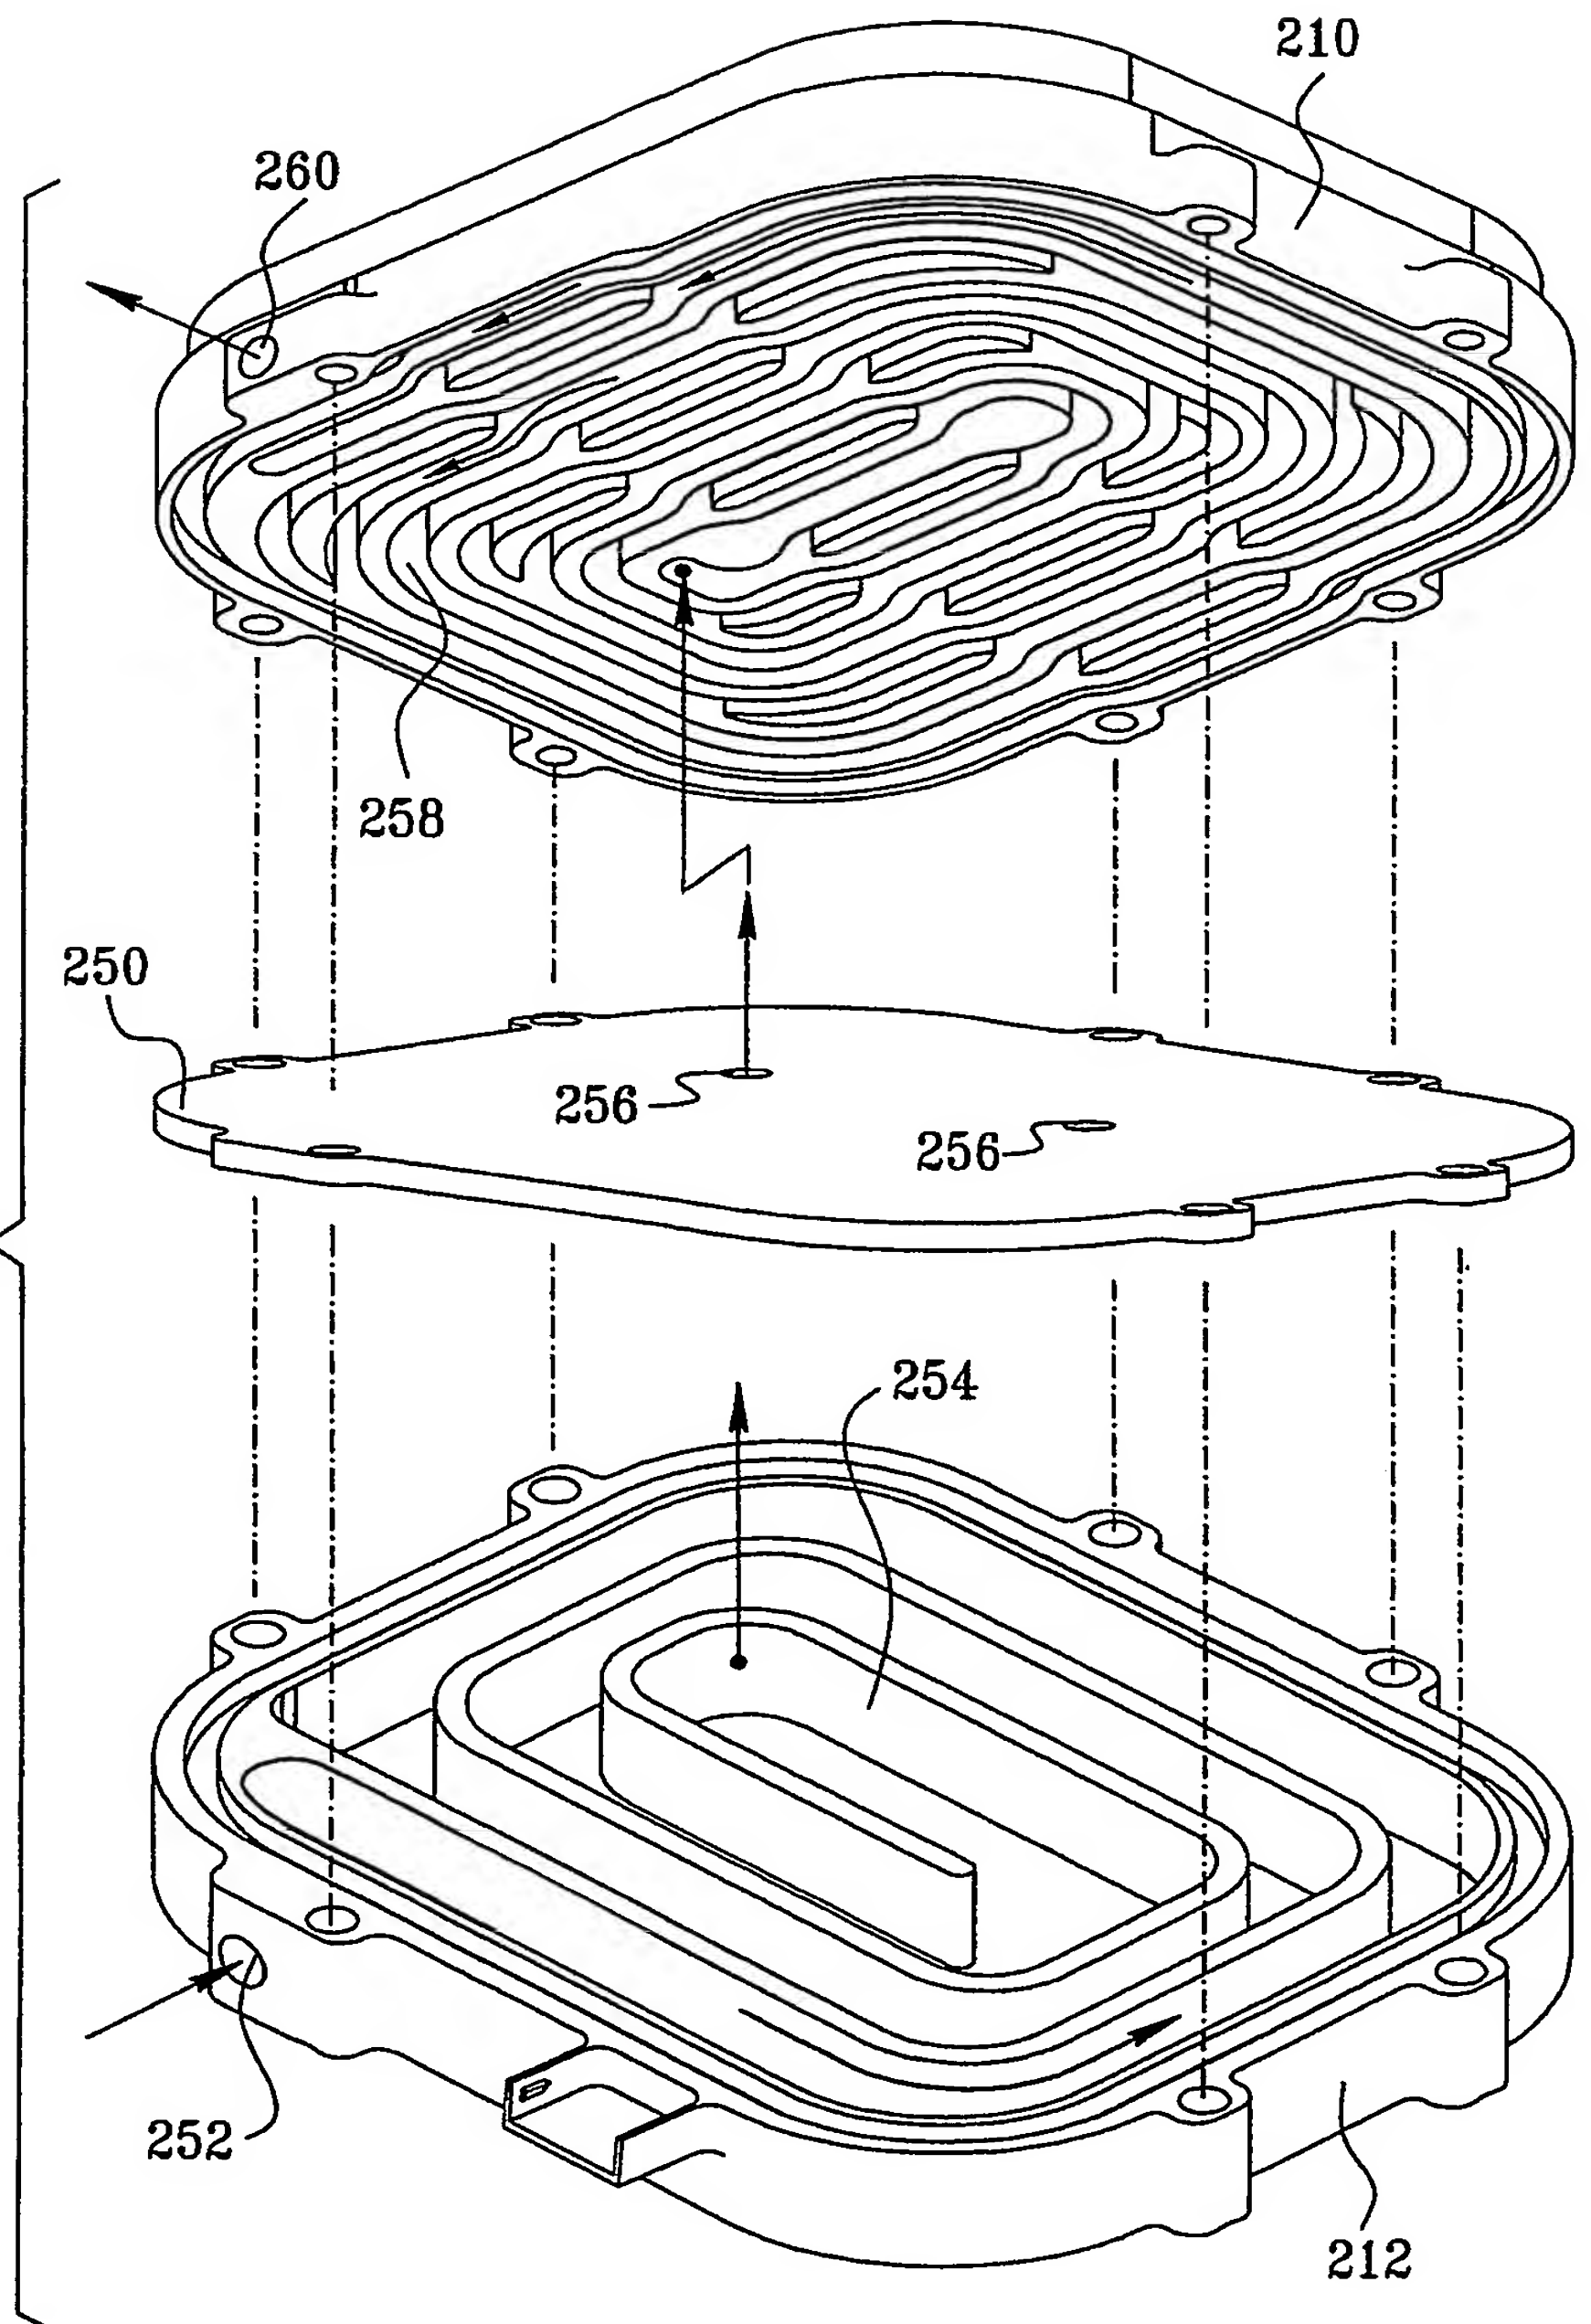


FIG. 5

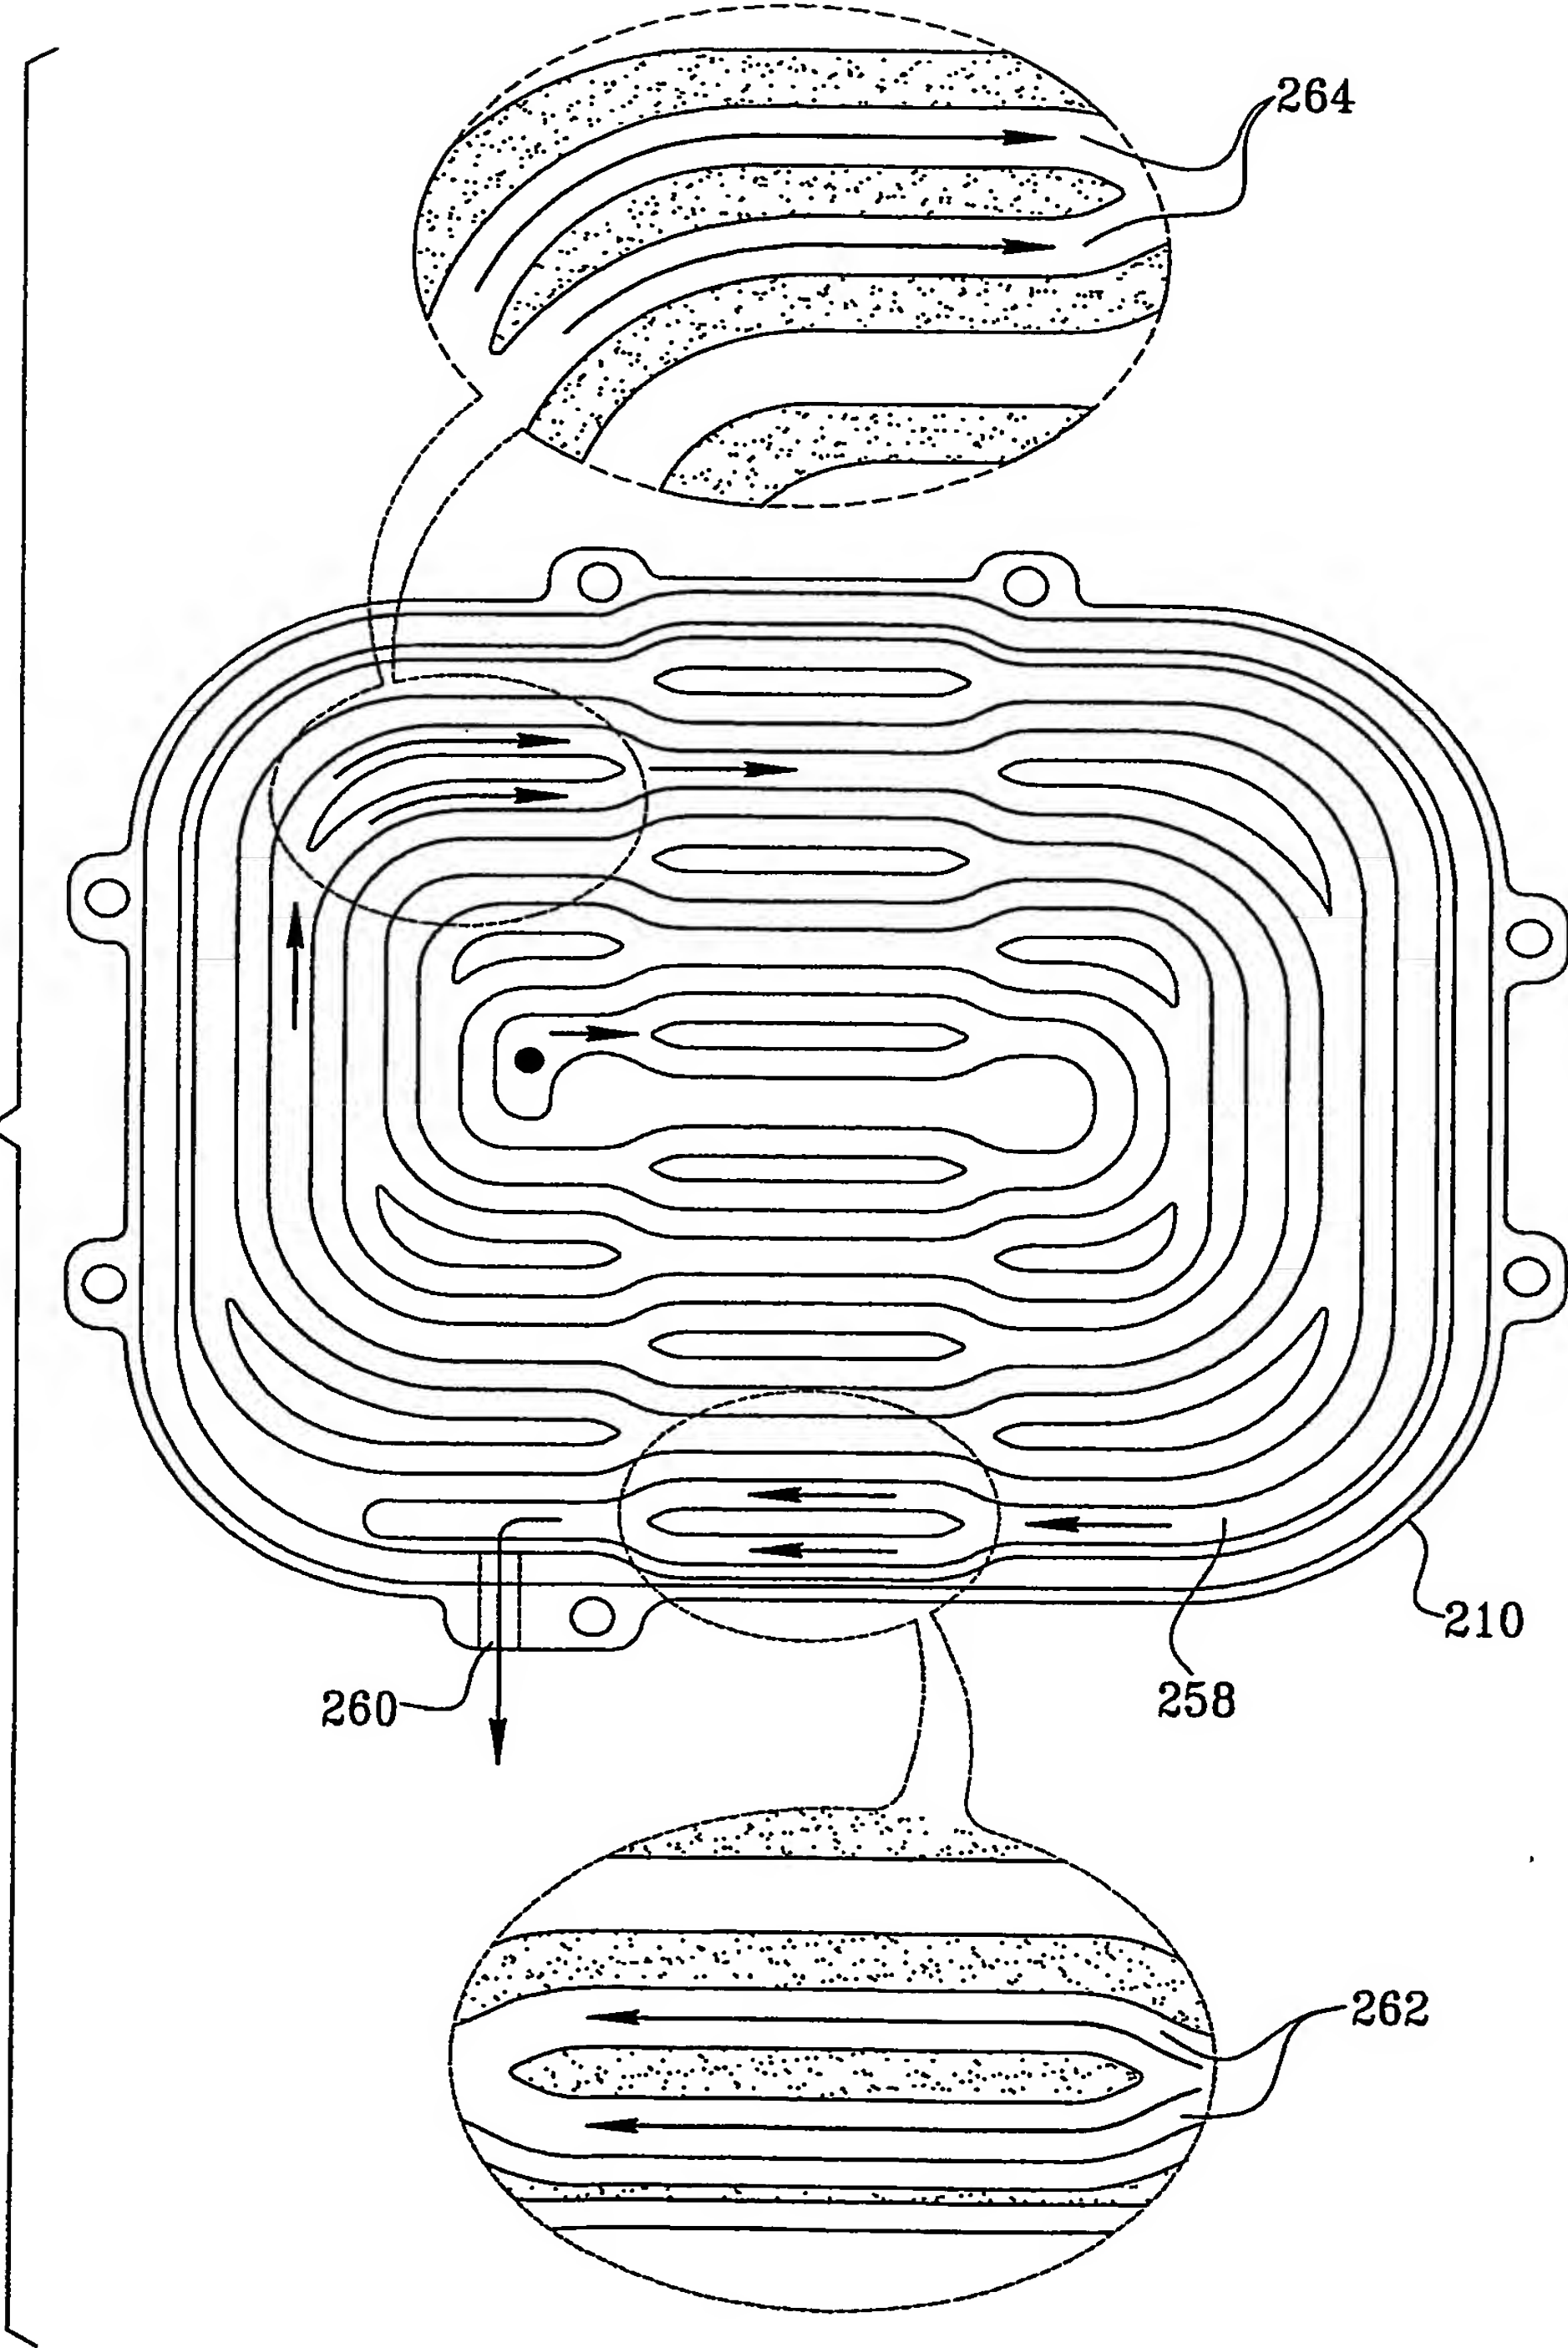

7/37

FIG. 6A

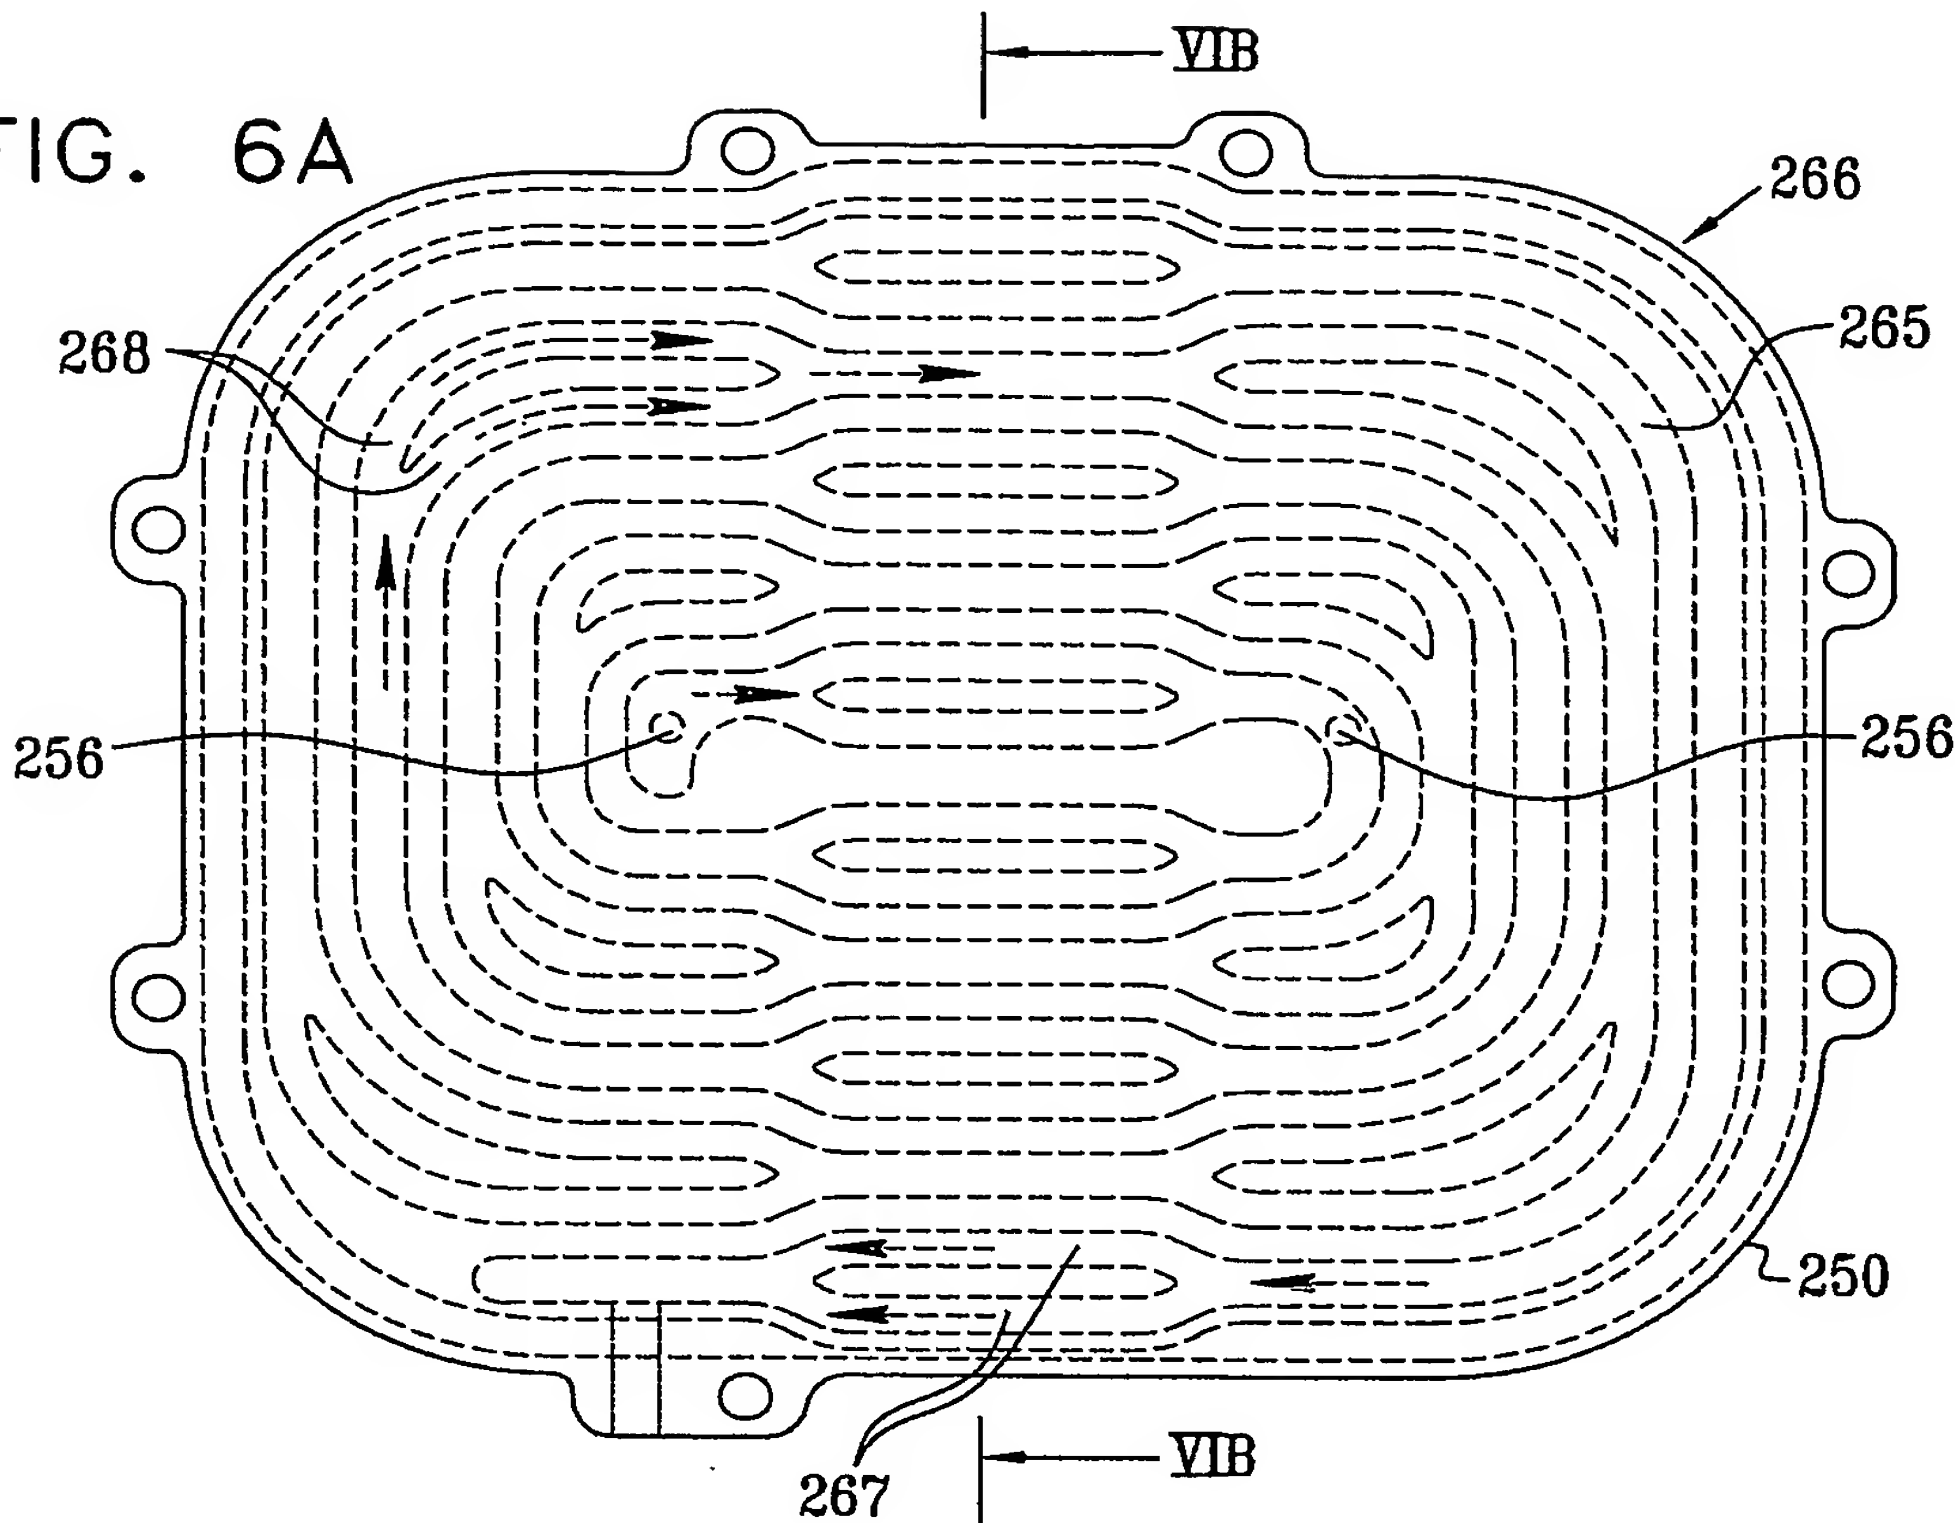


FIG. 6B


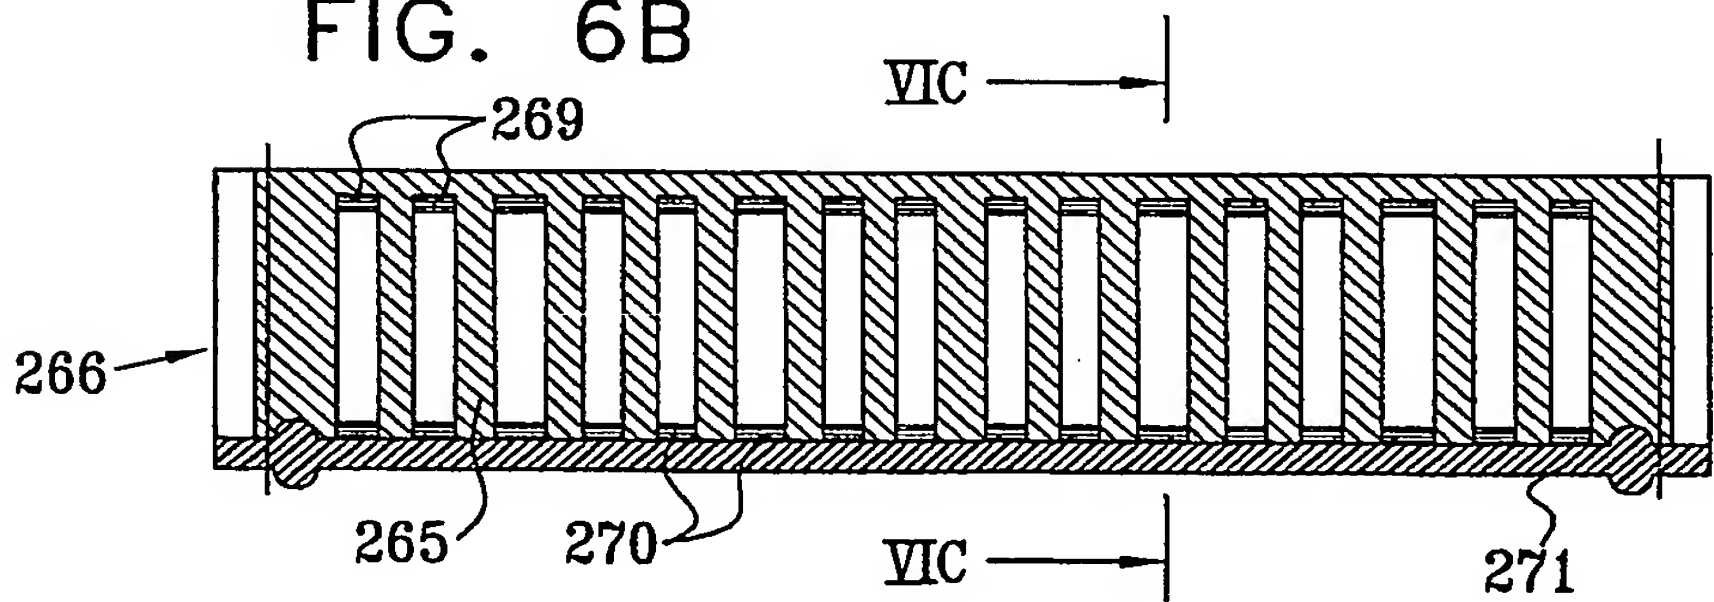


FIG. 6C

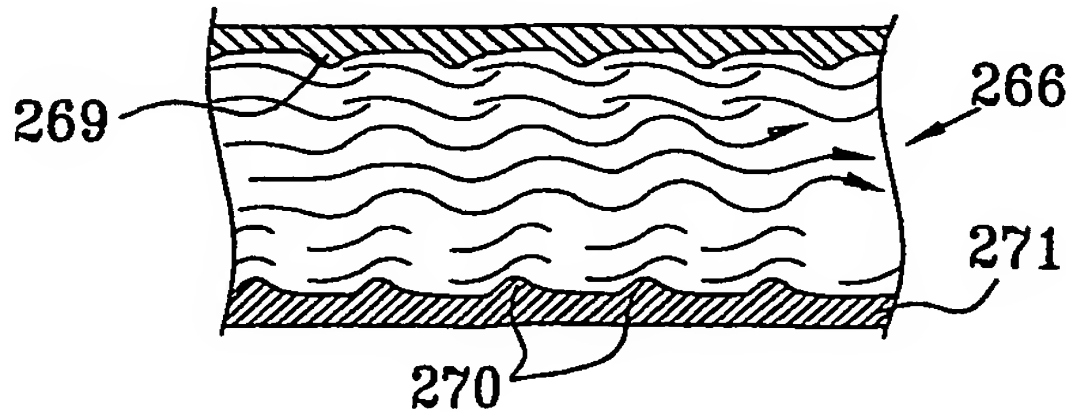

8/37

FIG. 7A



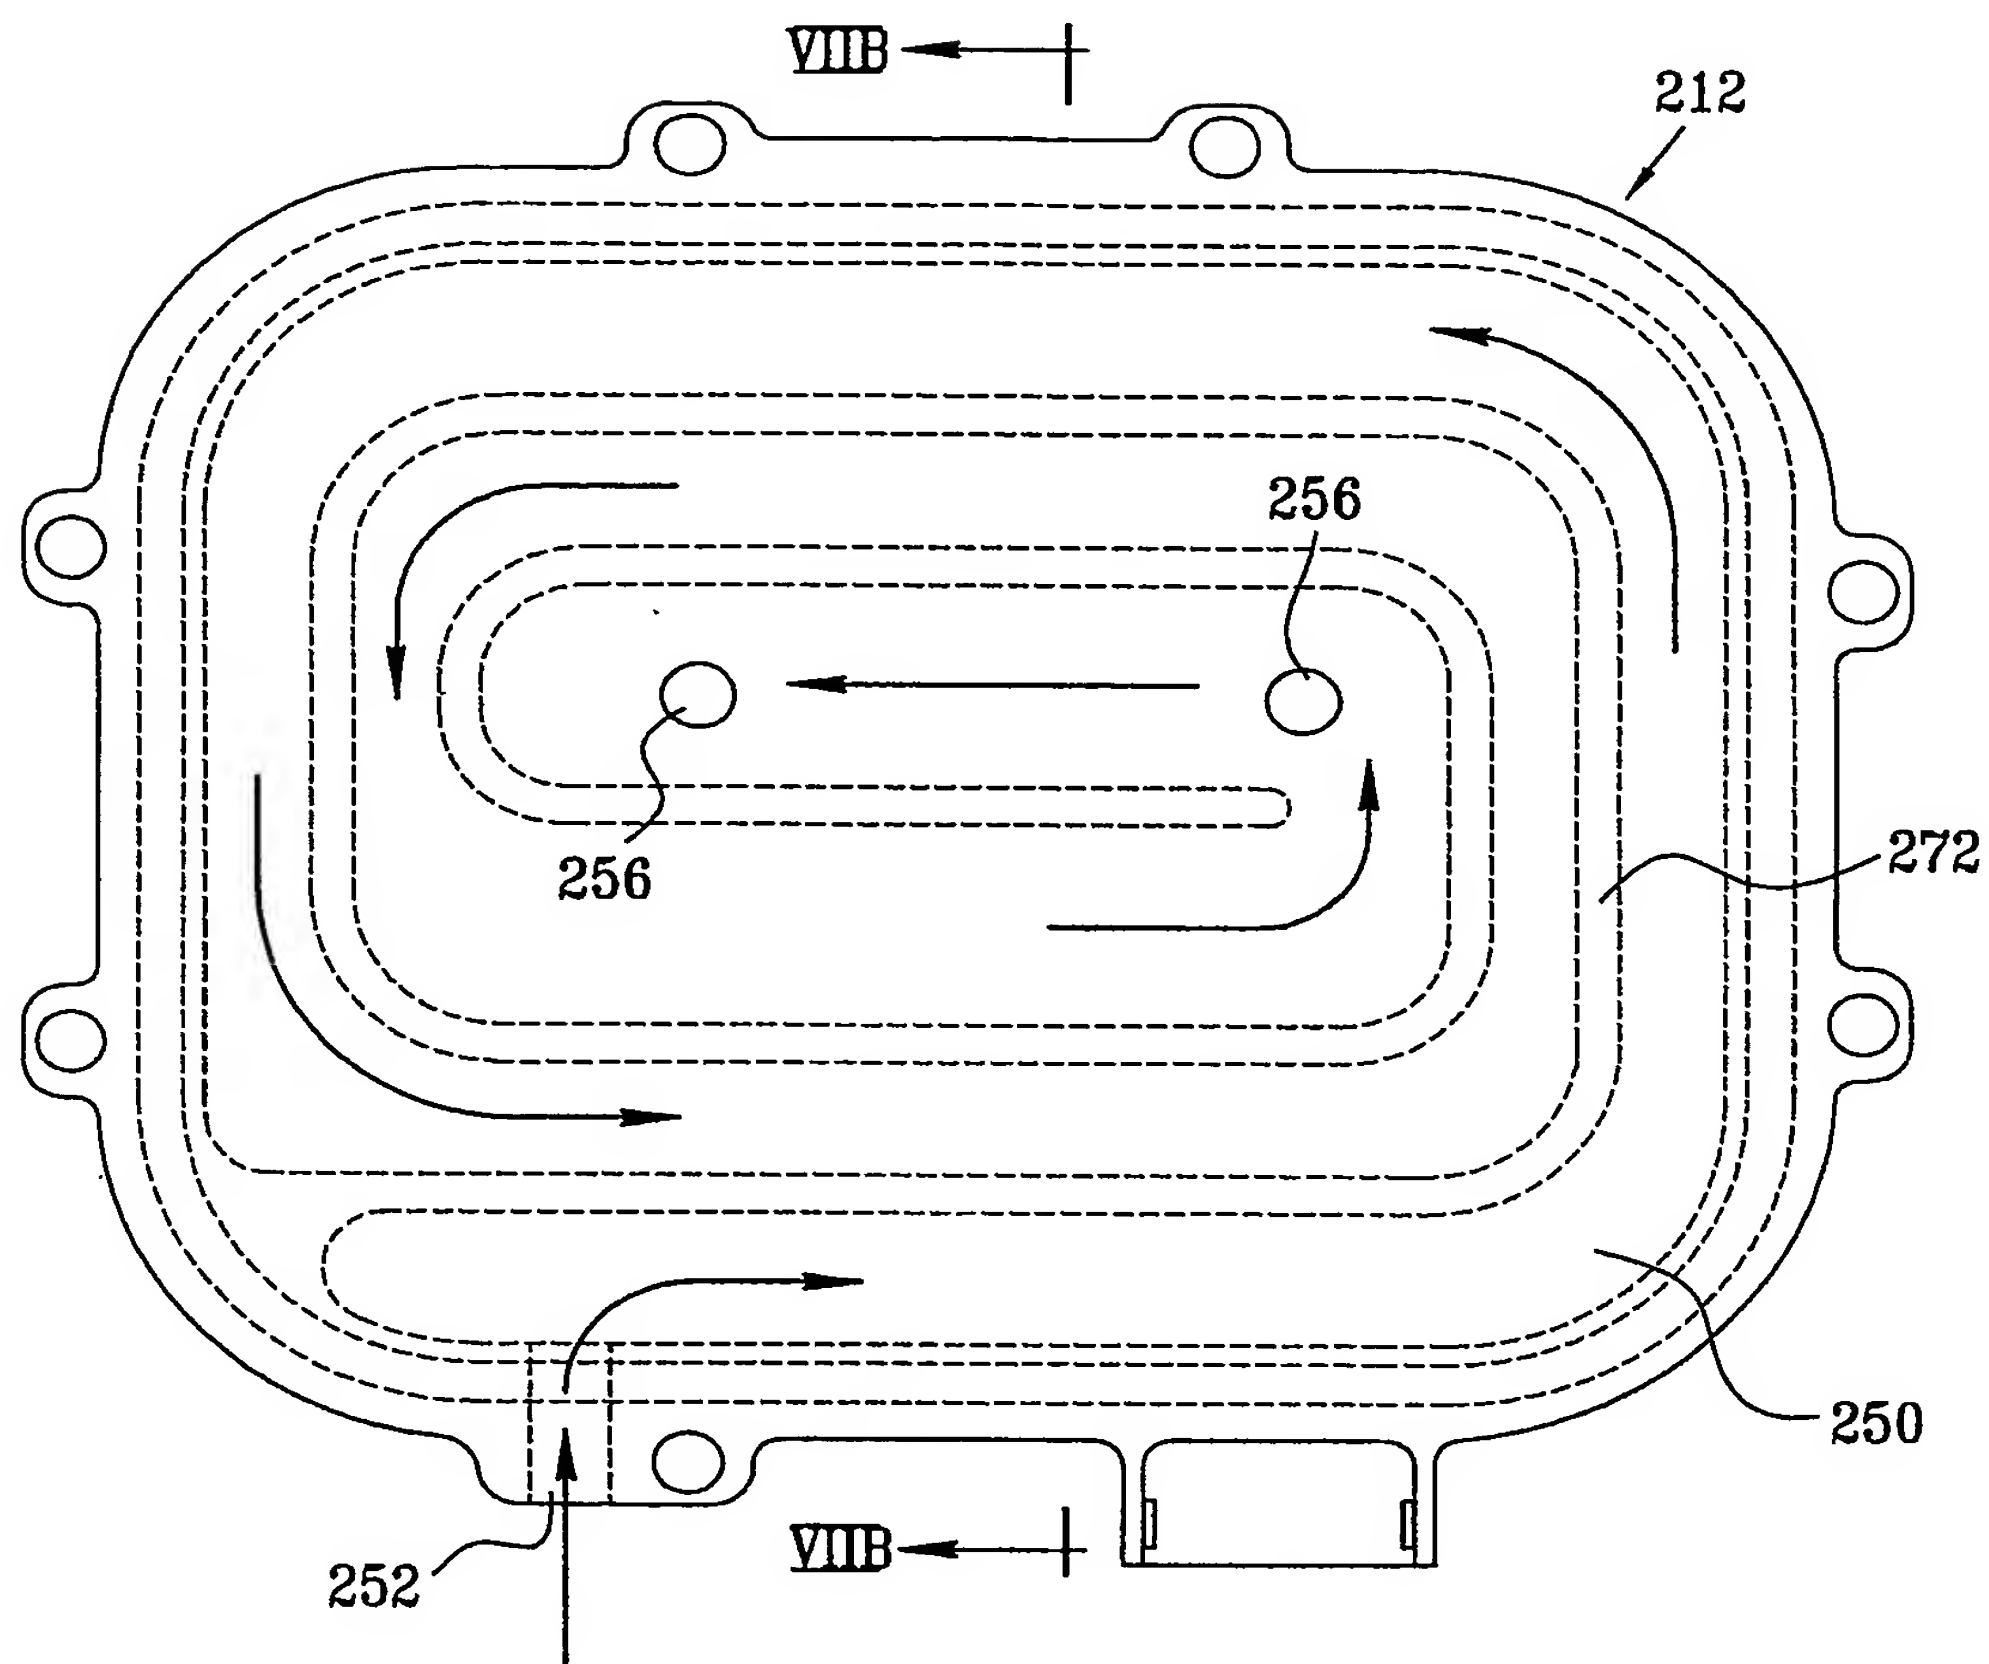


FIG. 7B

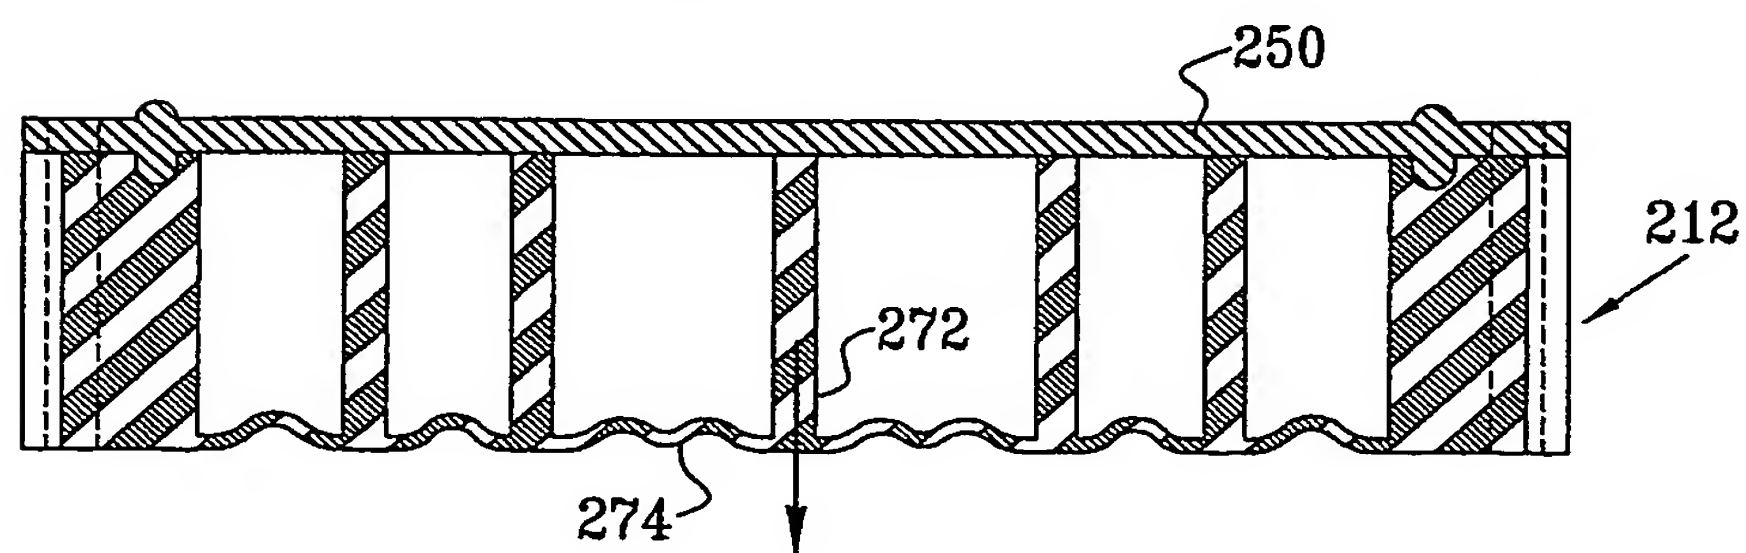

9/37

FIG. 8

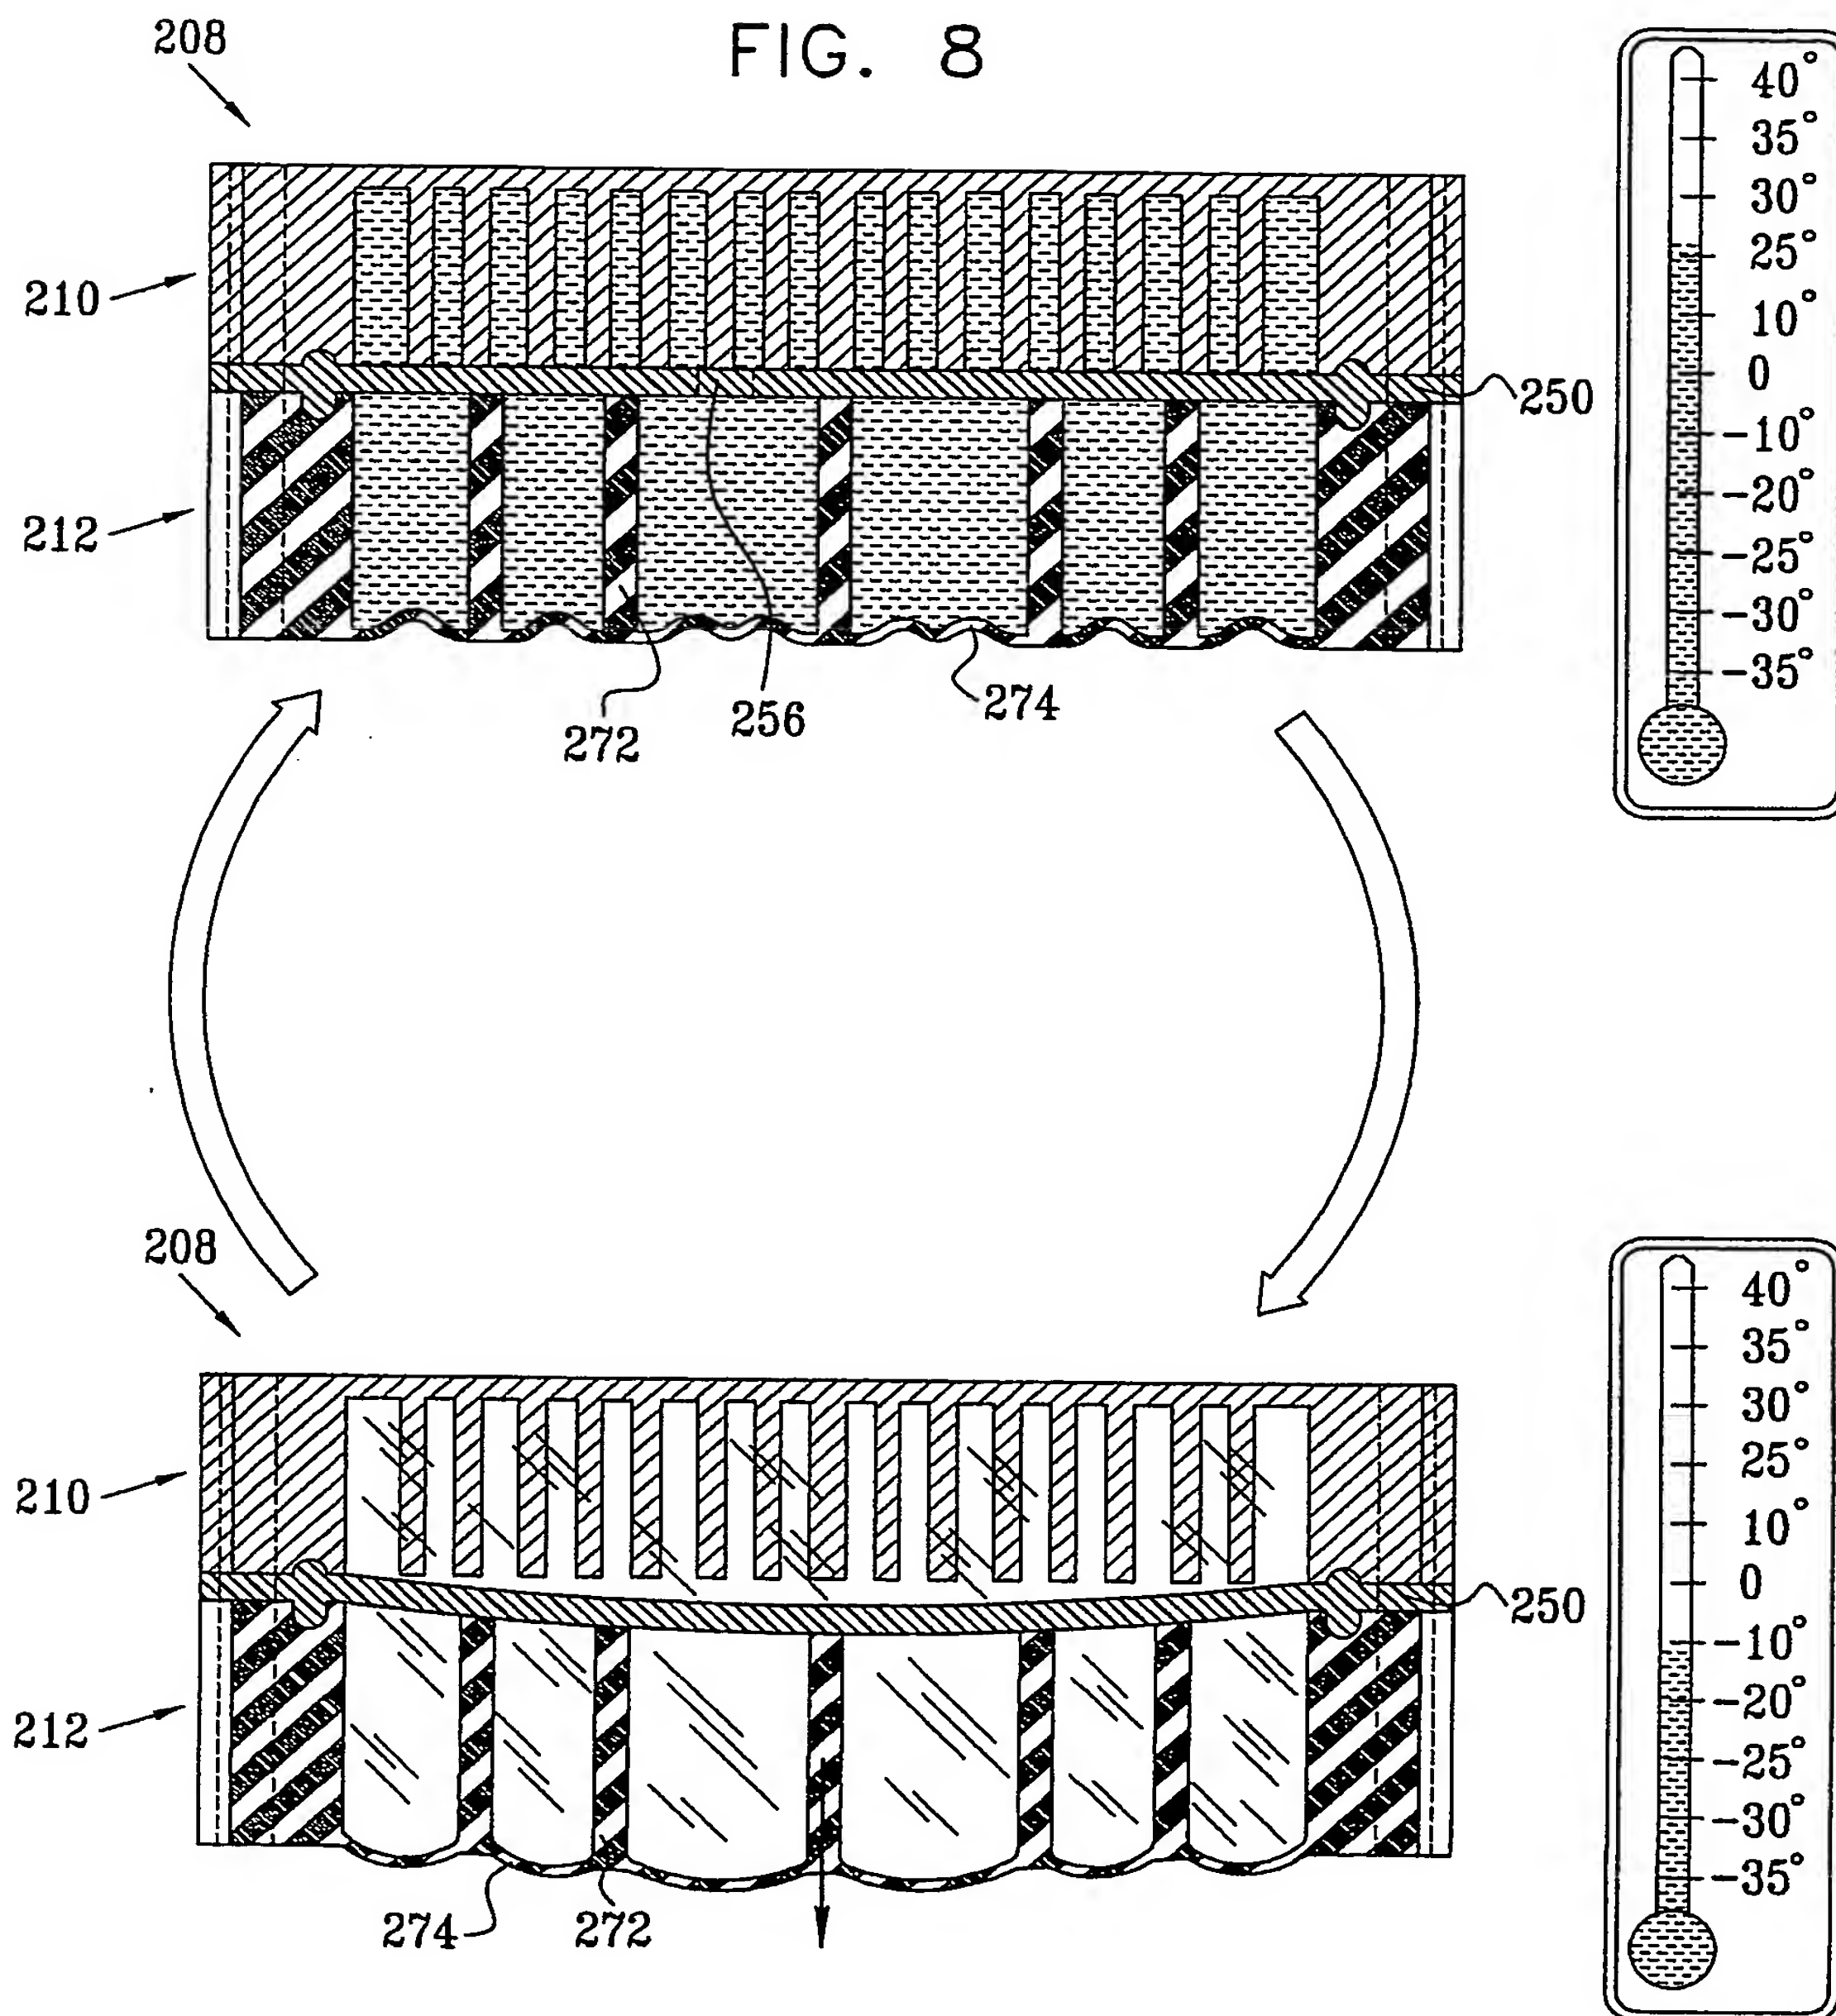

10/37 .

FIG. 9A



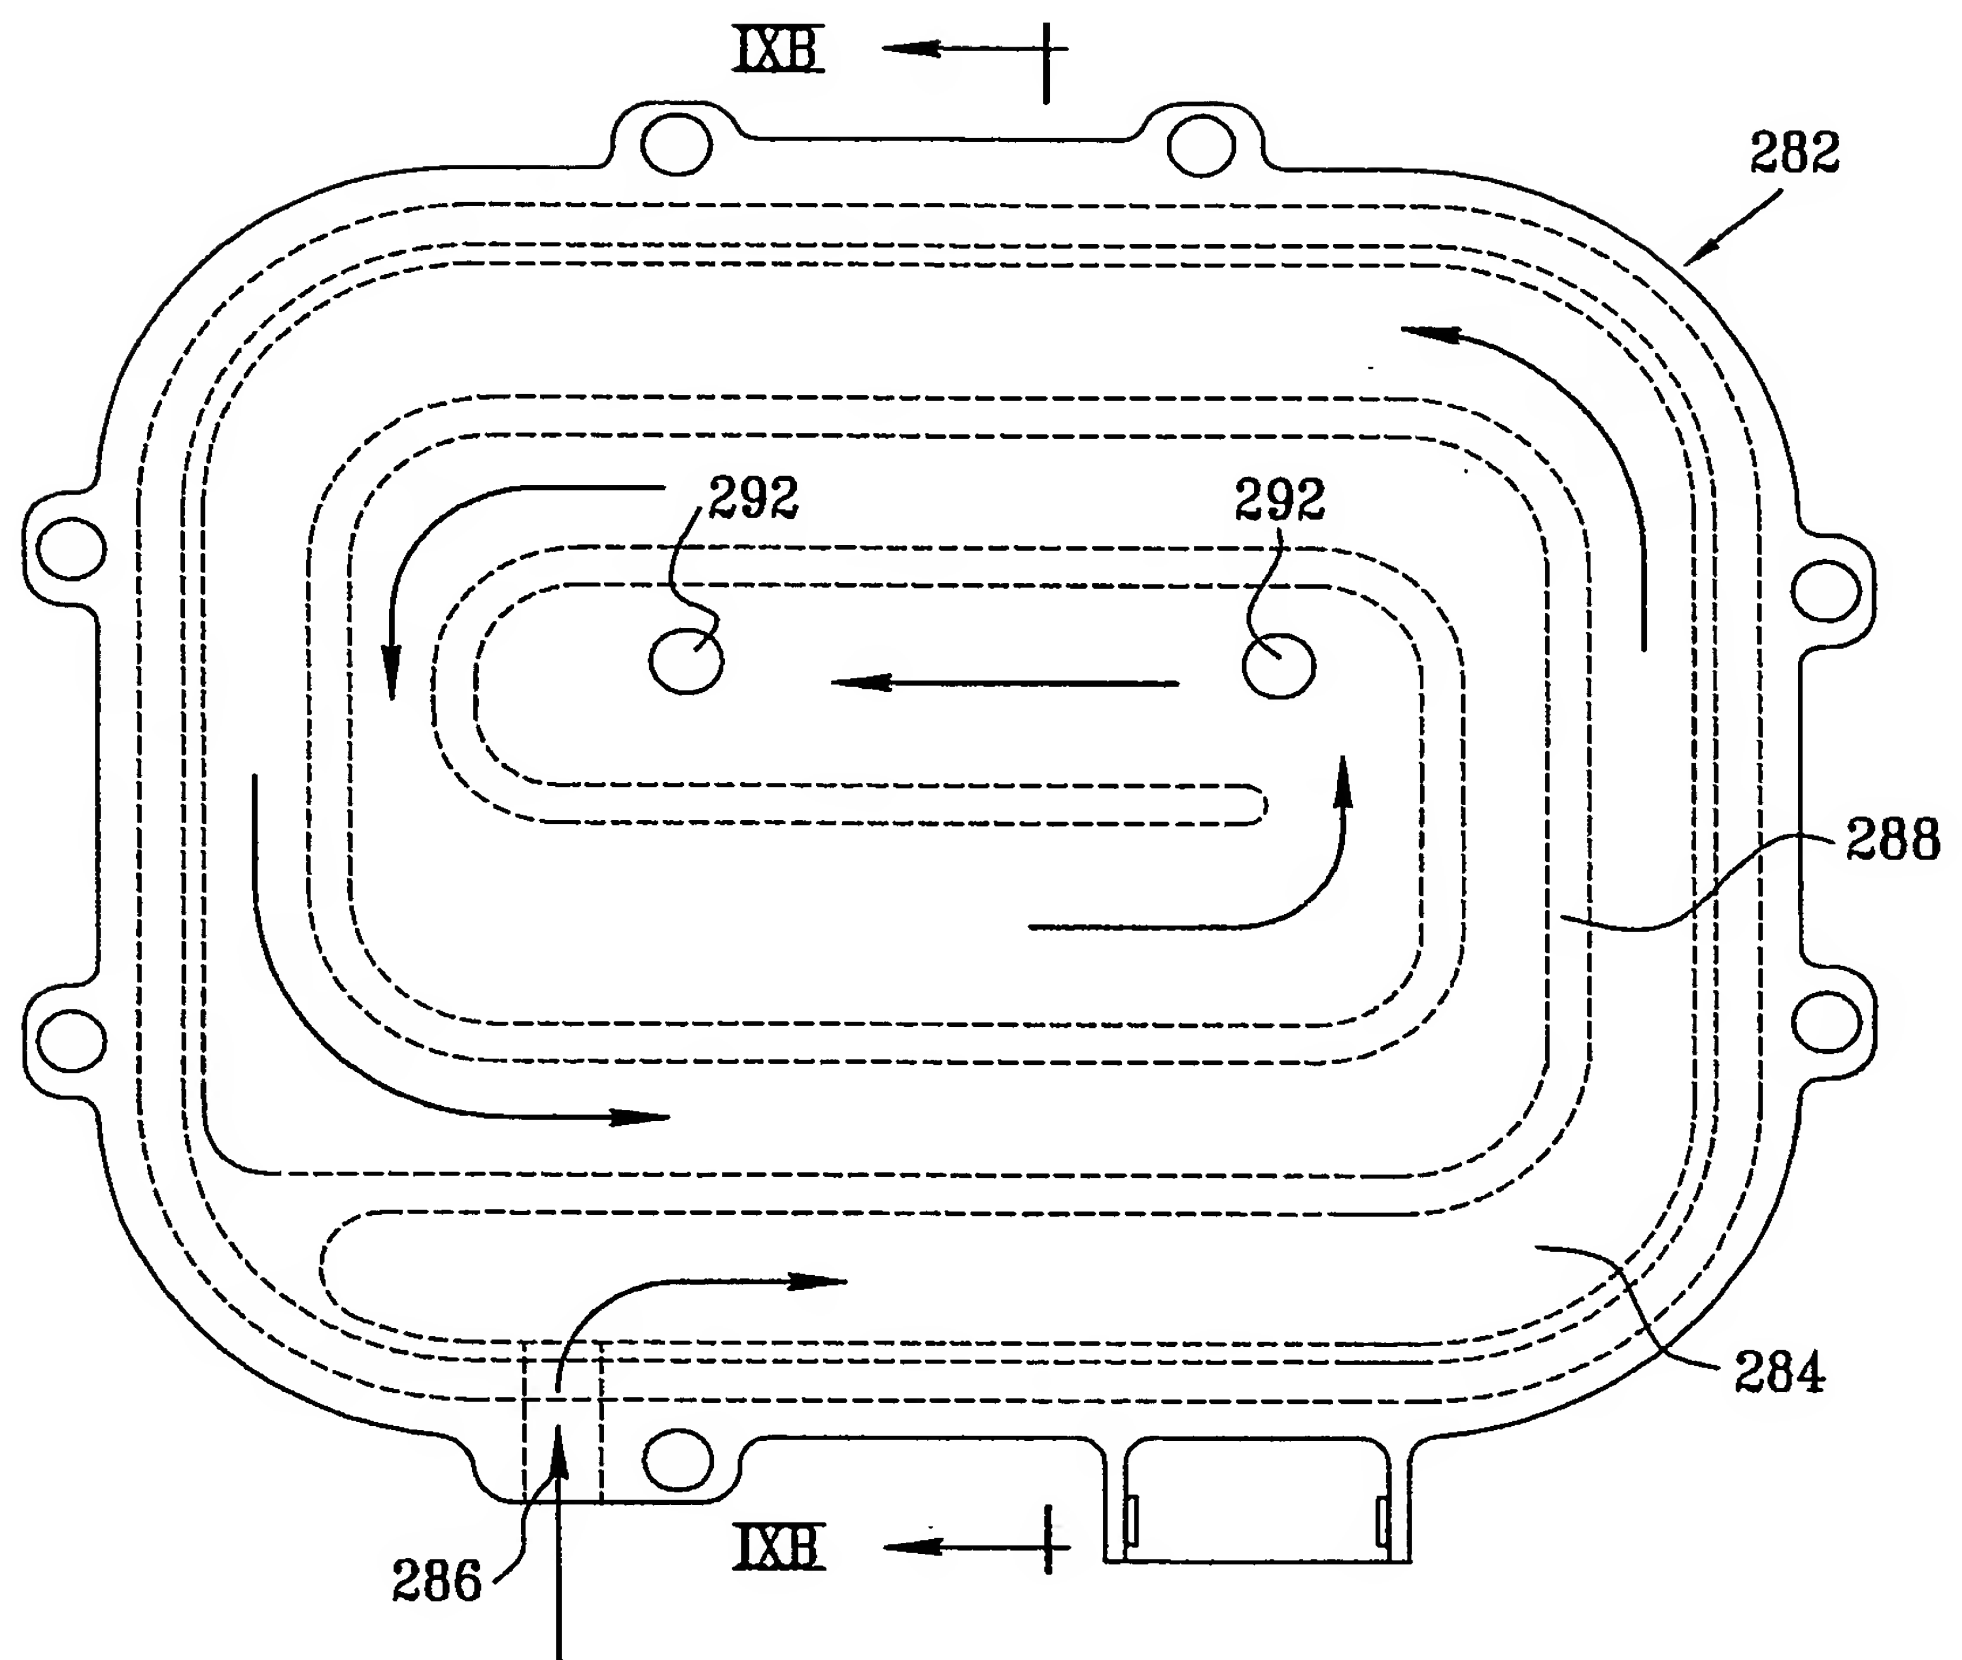


FIG. 9B

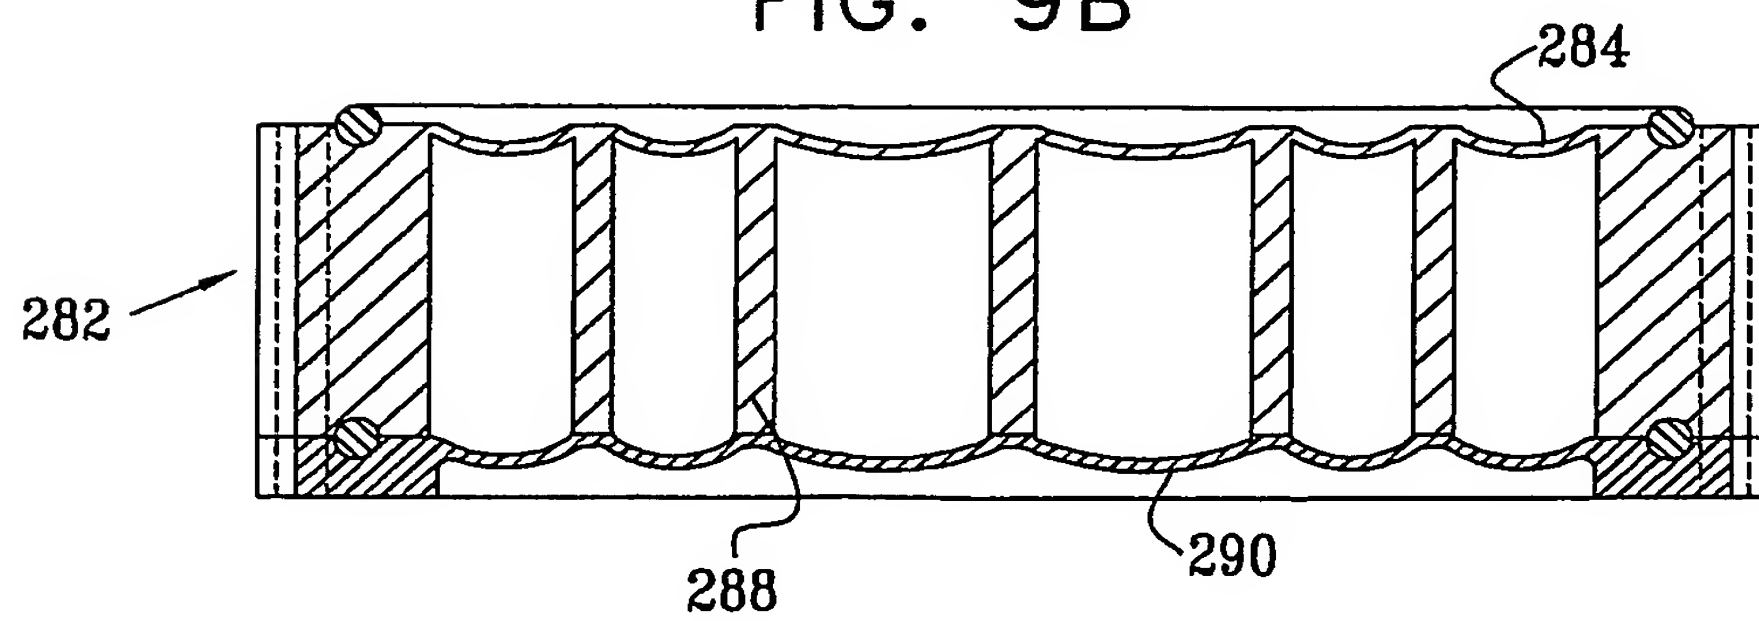

11/37

FIG. 10

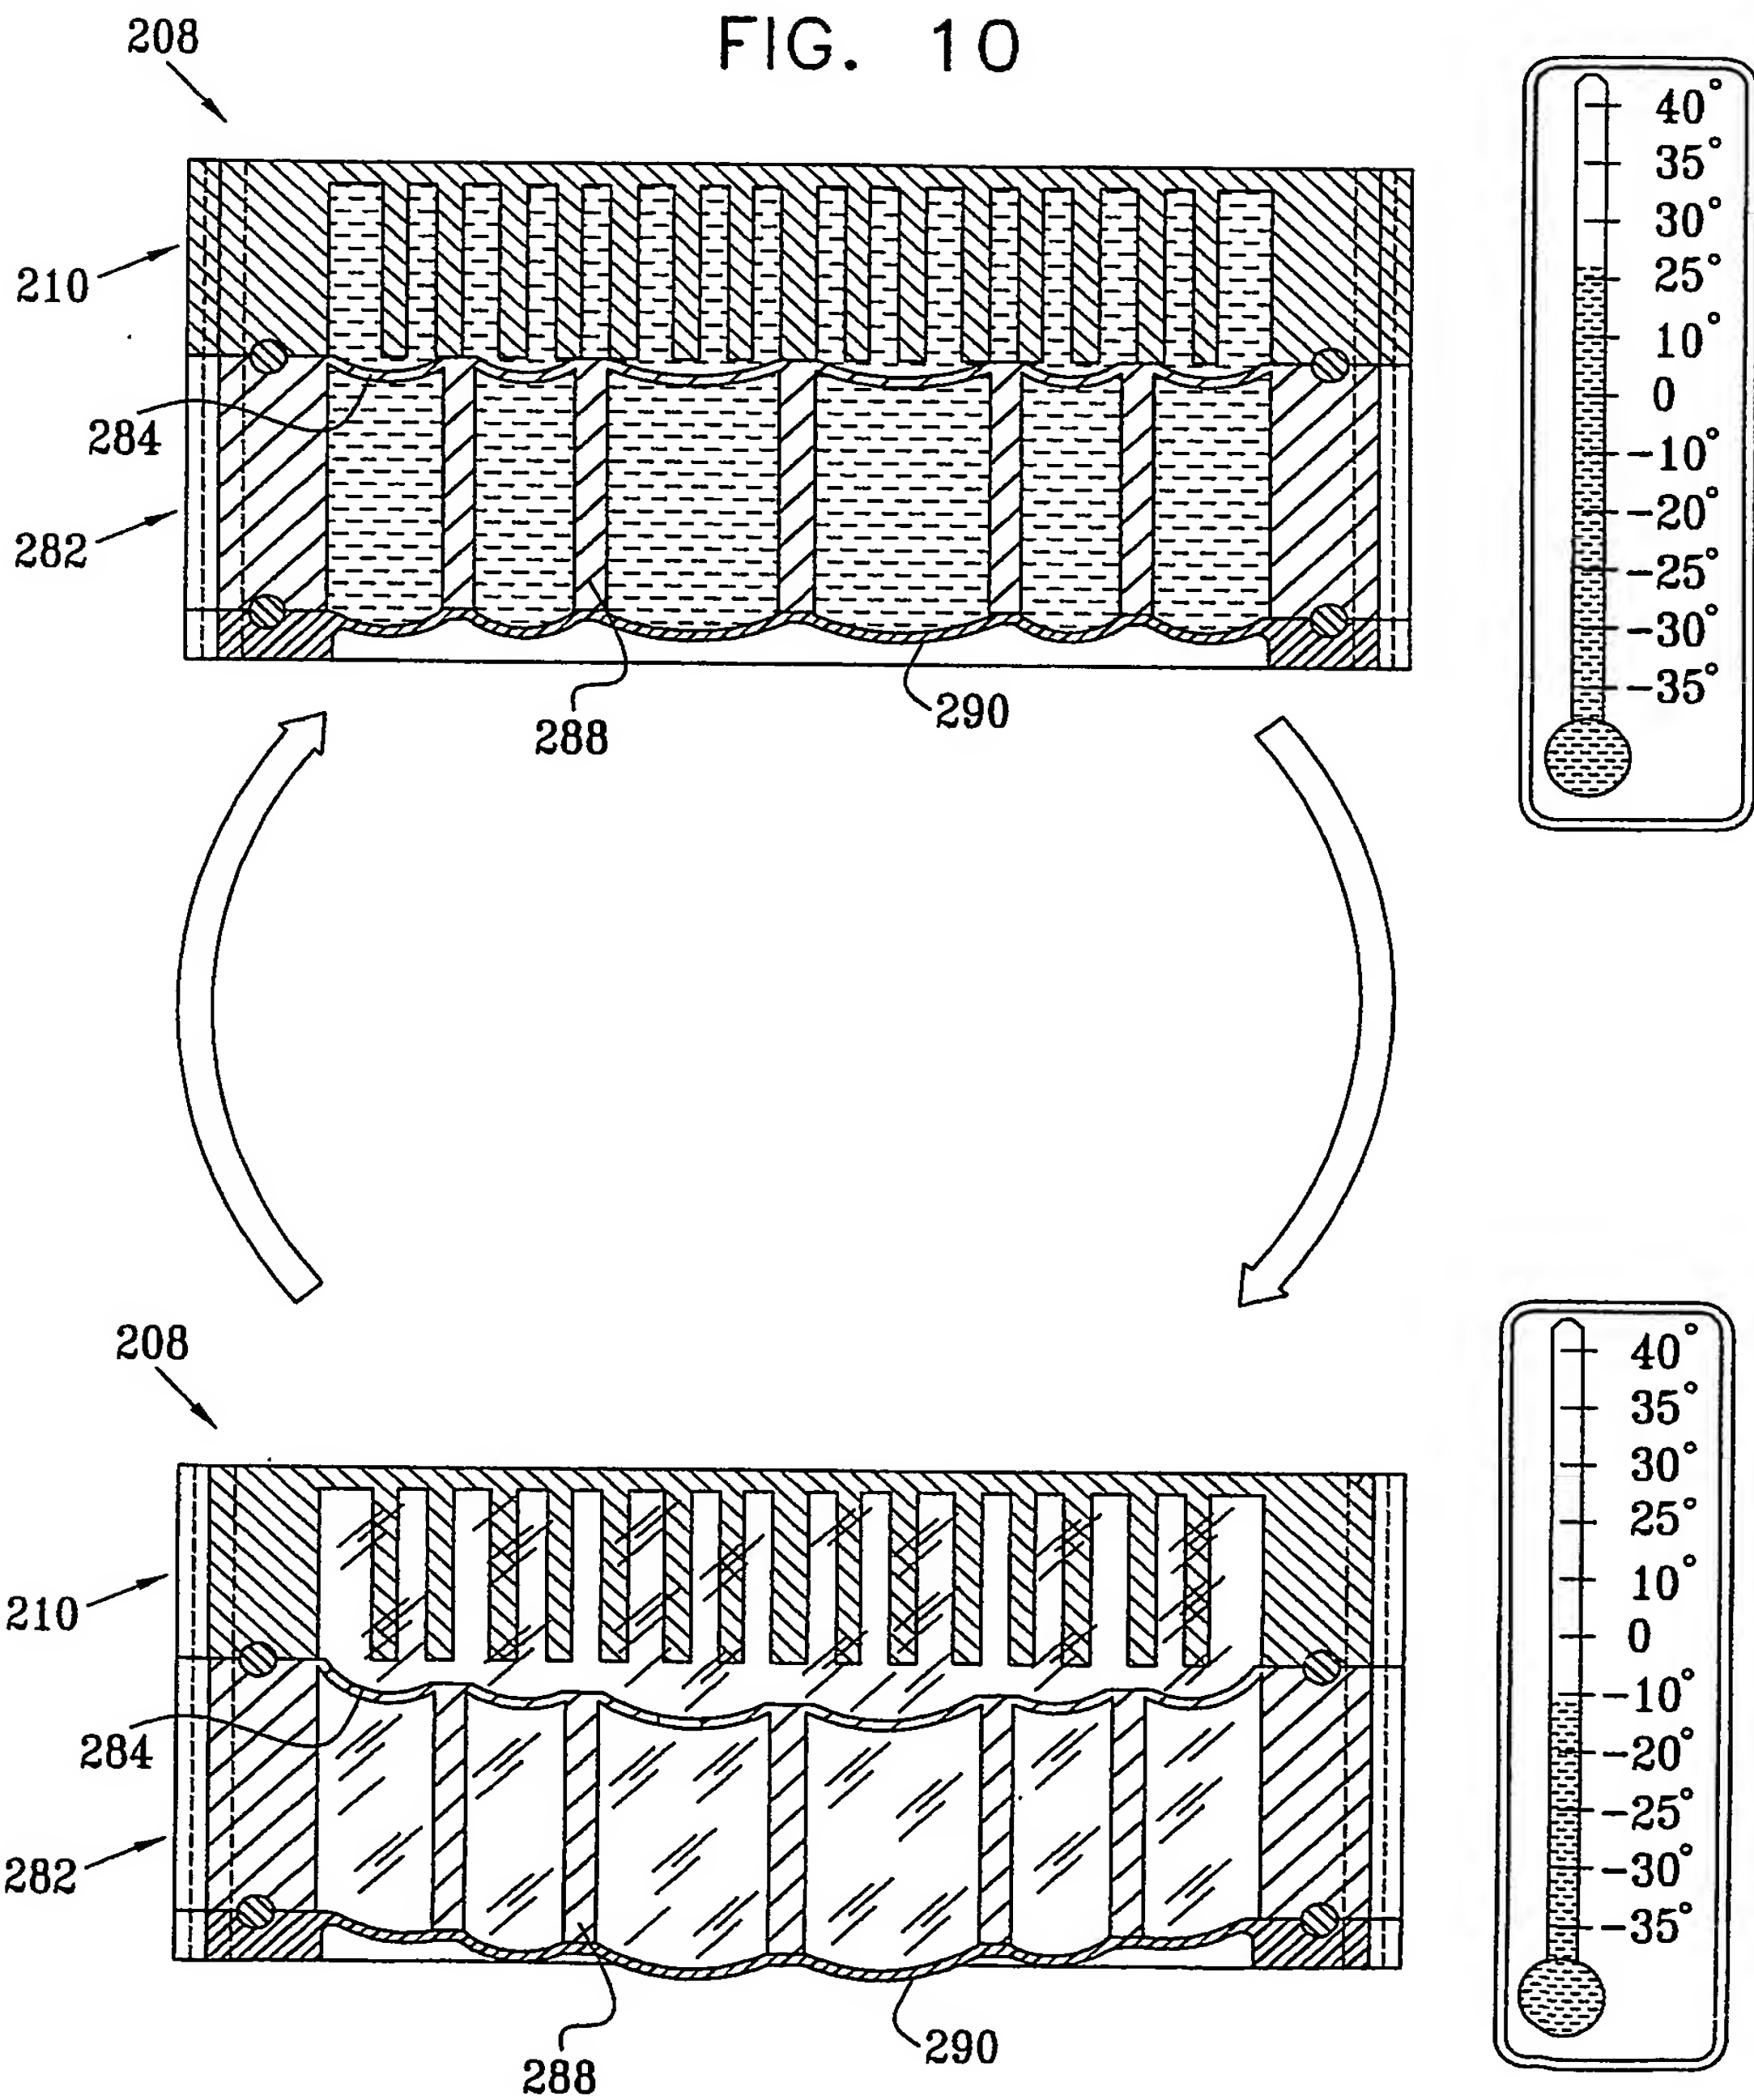

12/37

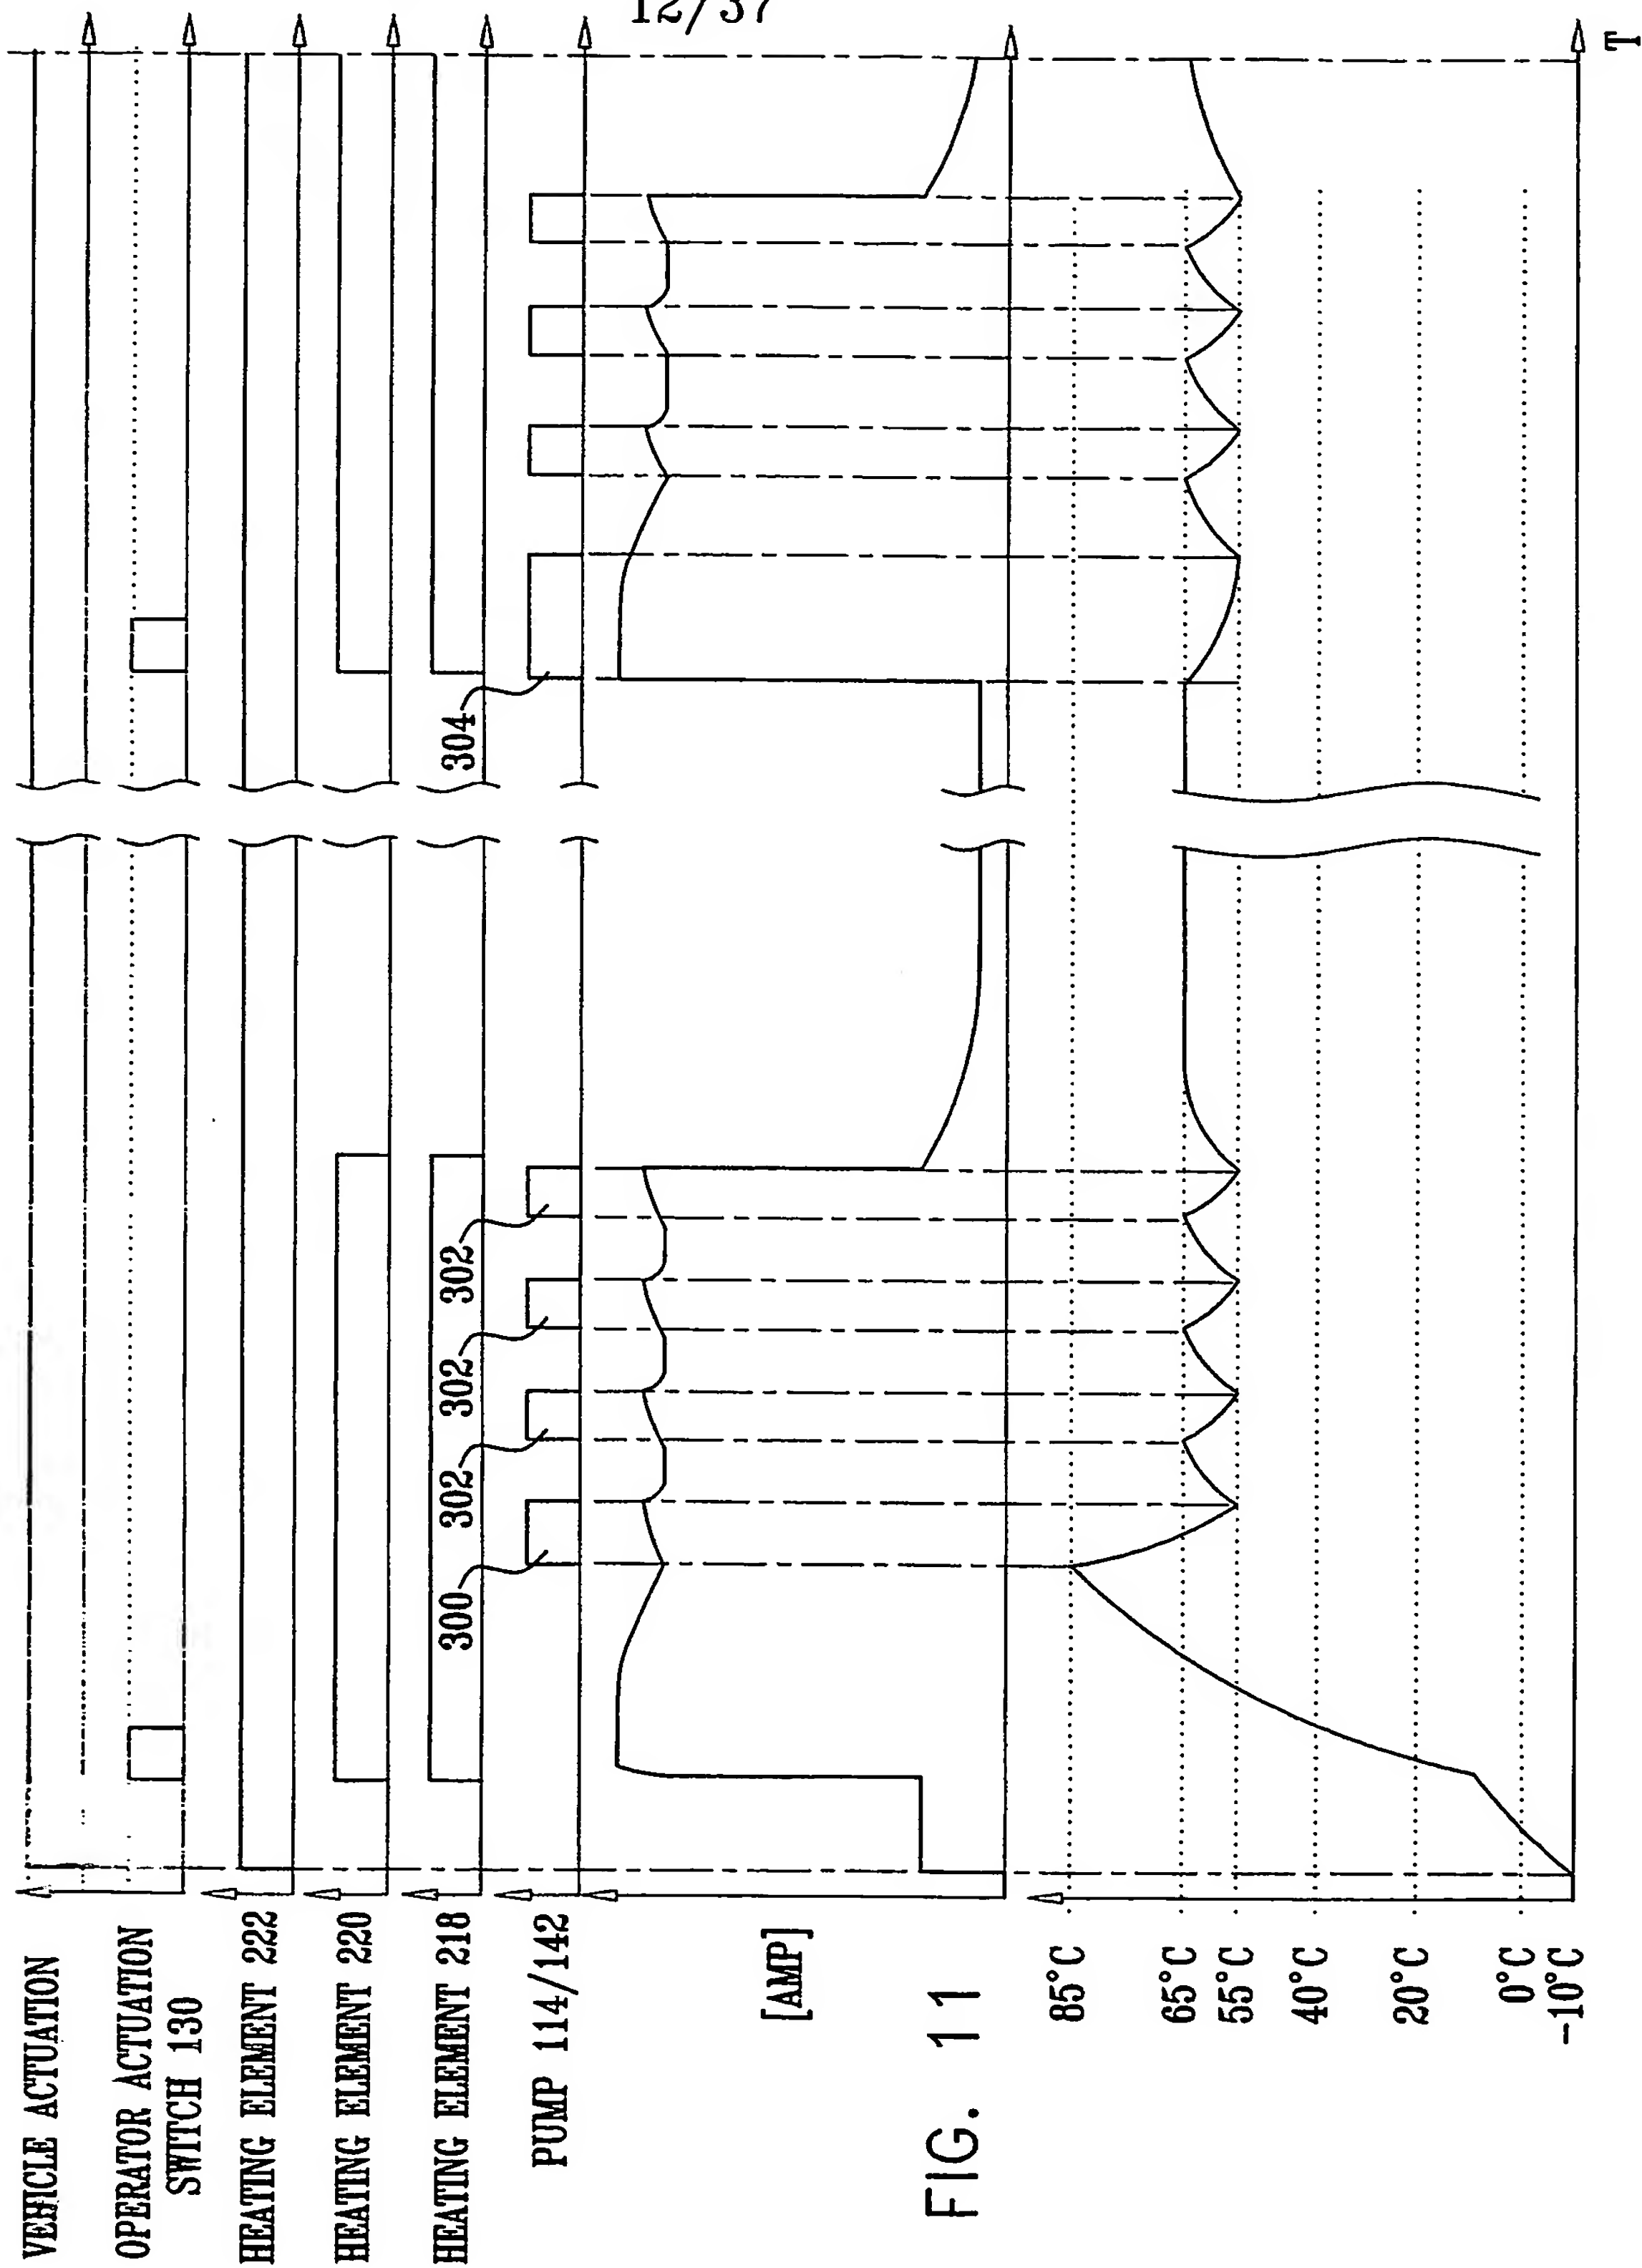


FIG. 11


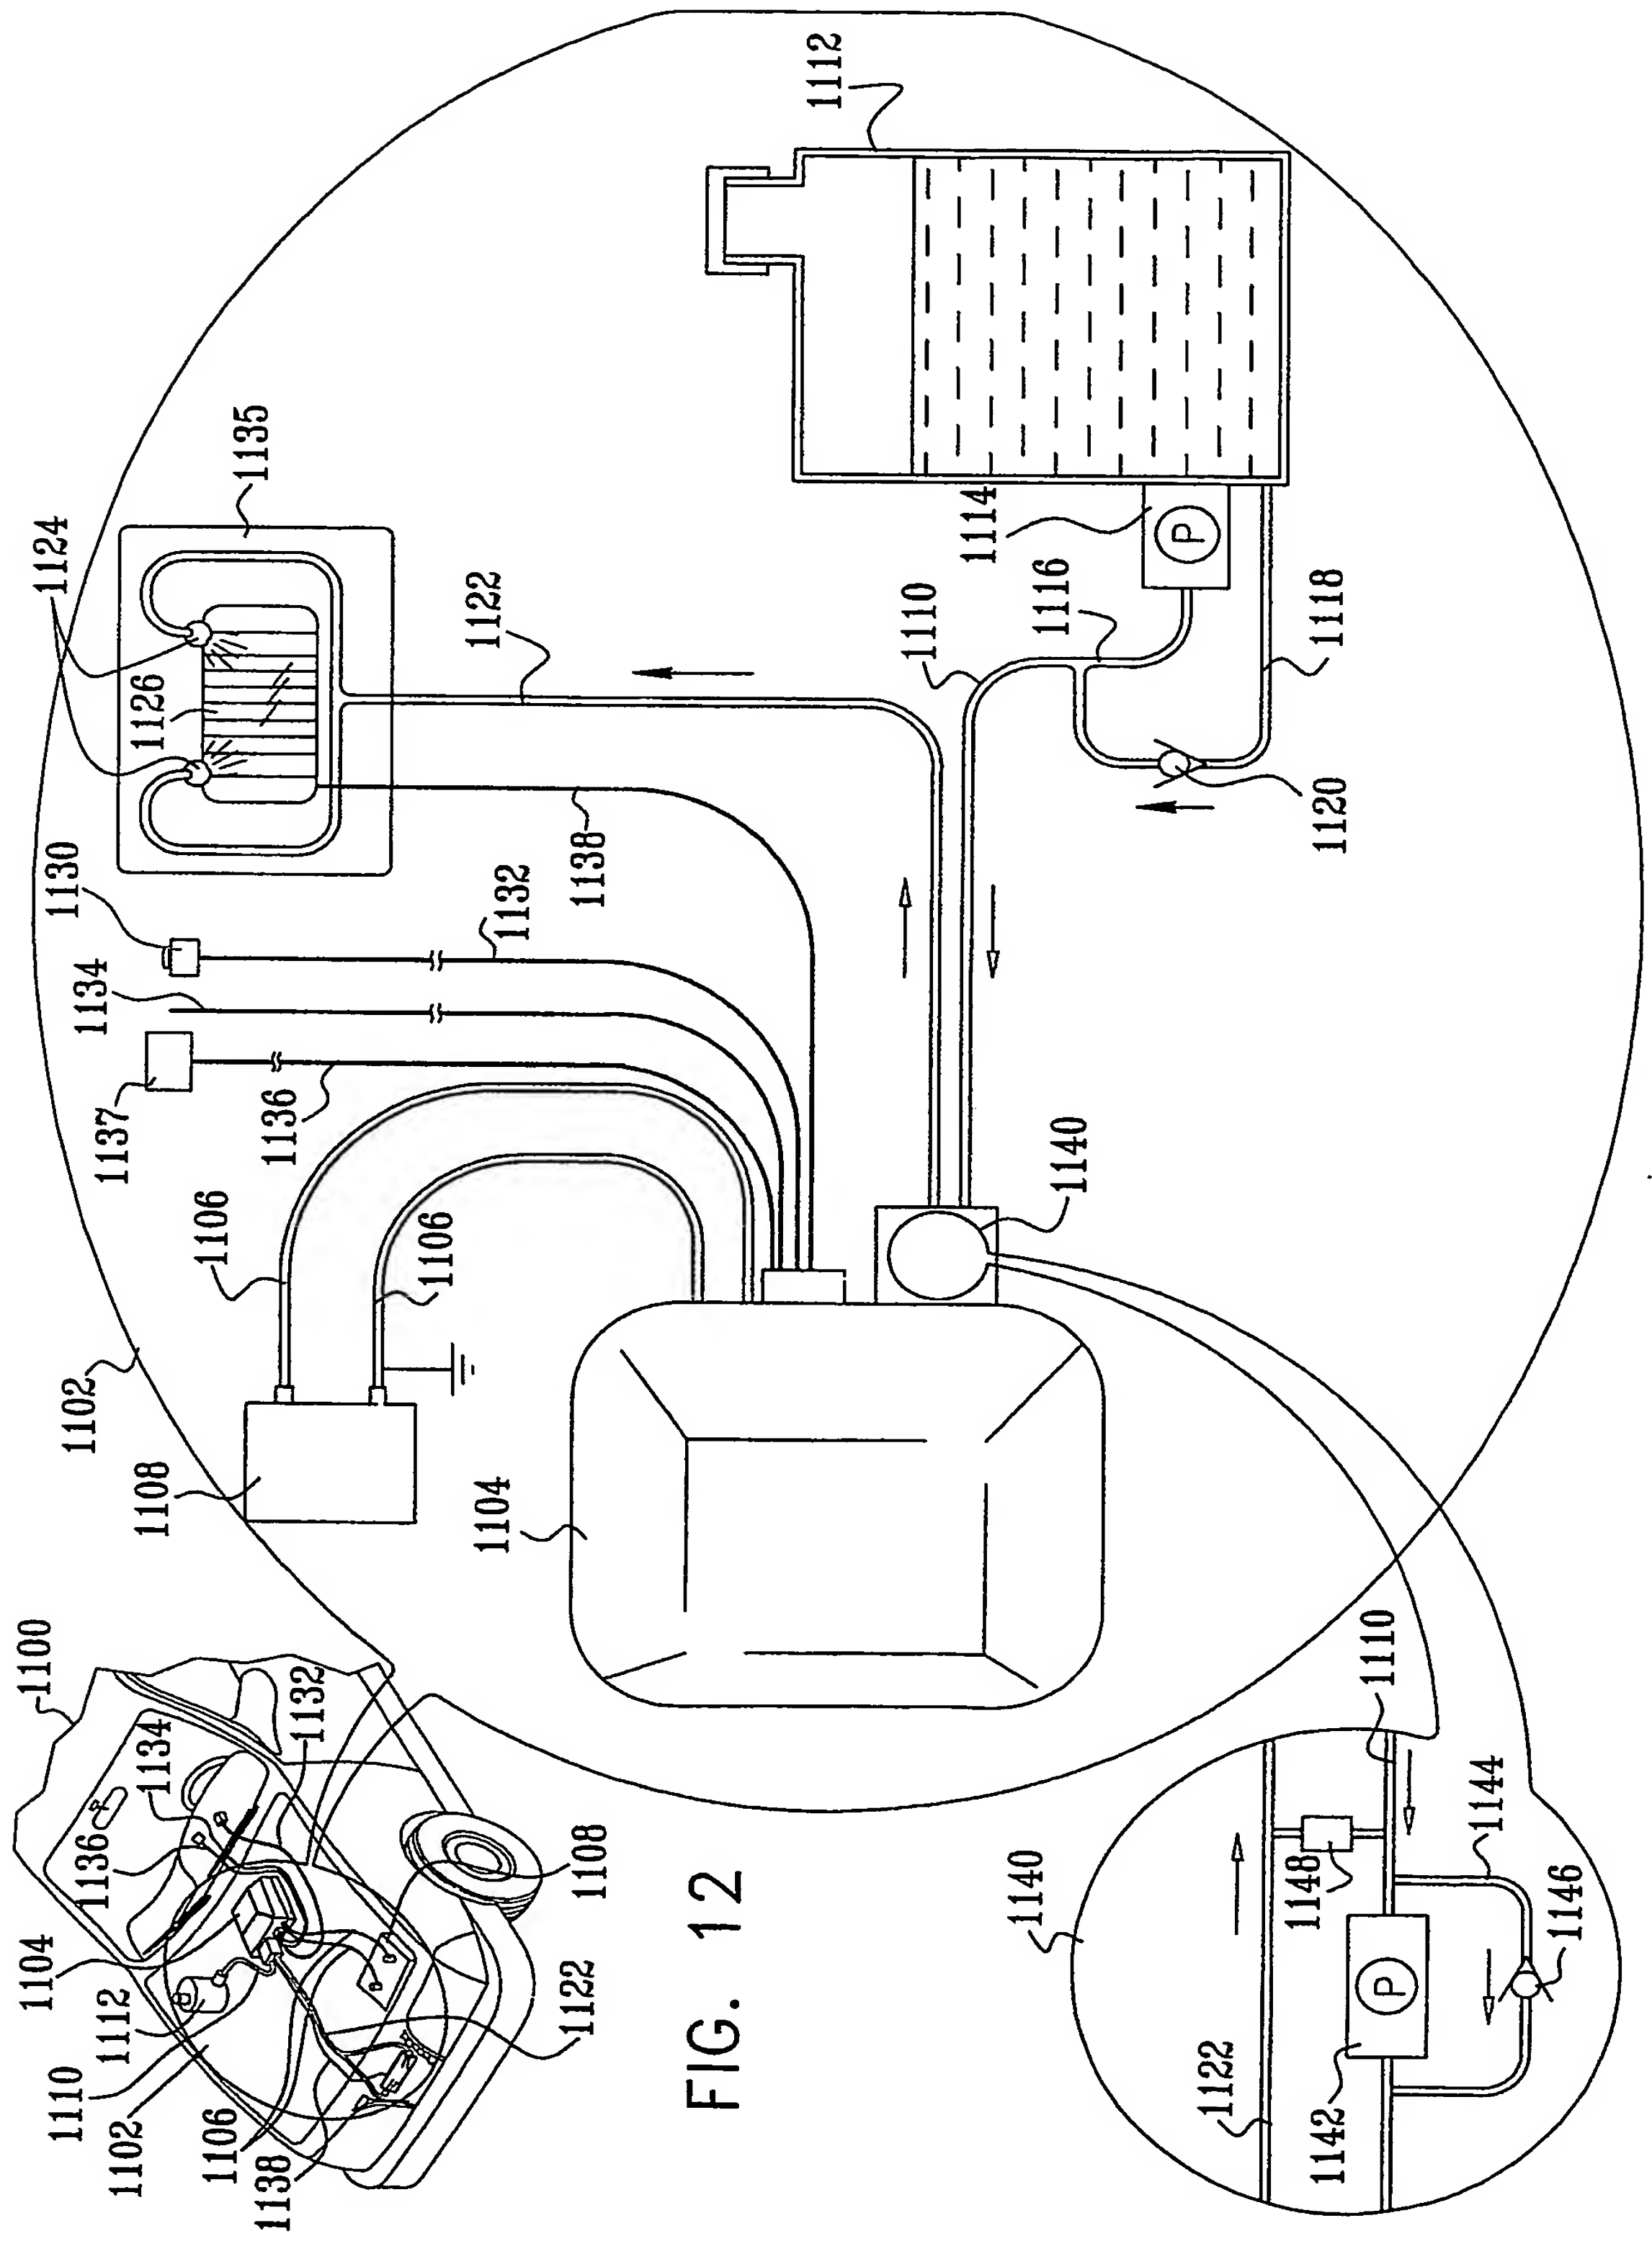


FIG. 12


14/37

FIG. 13A

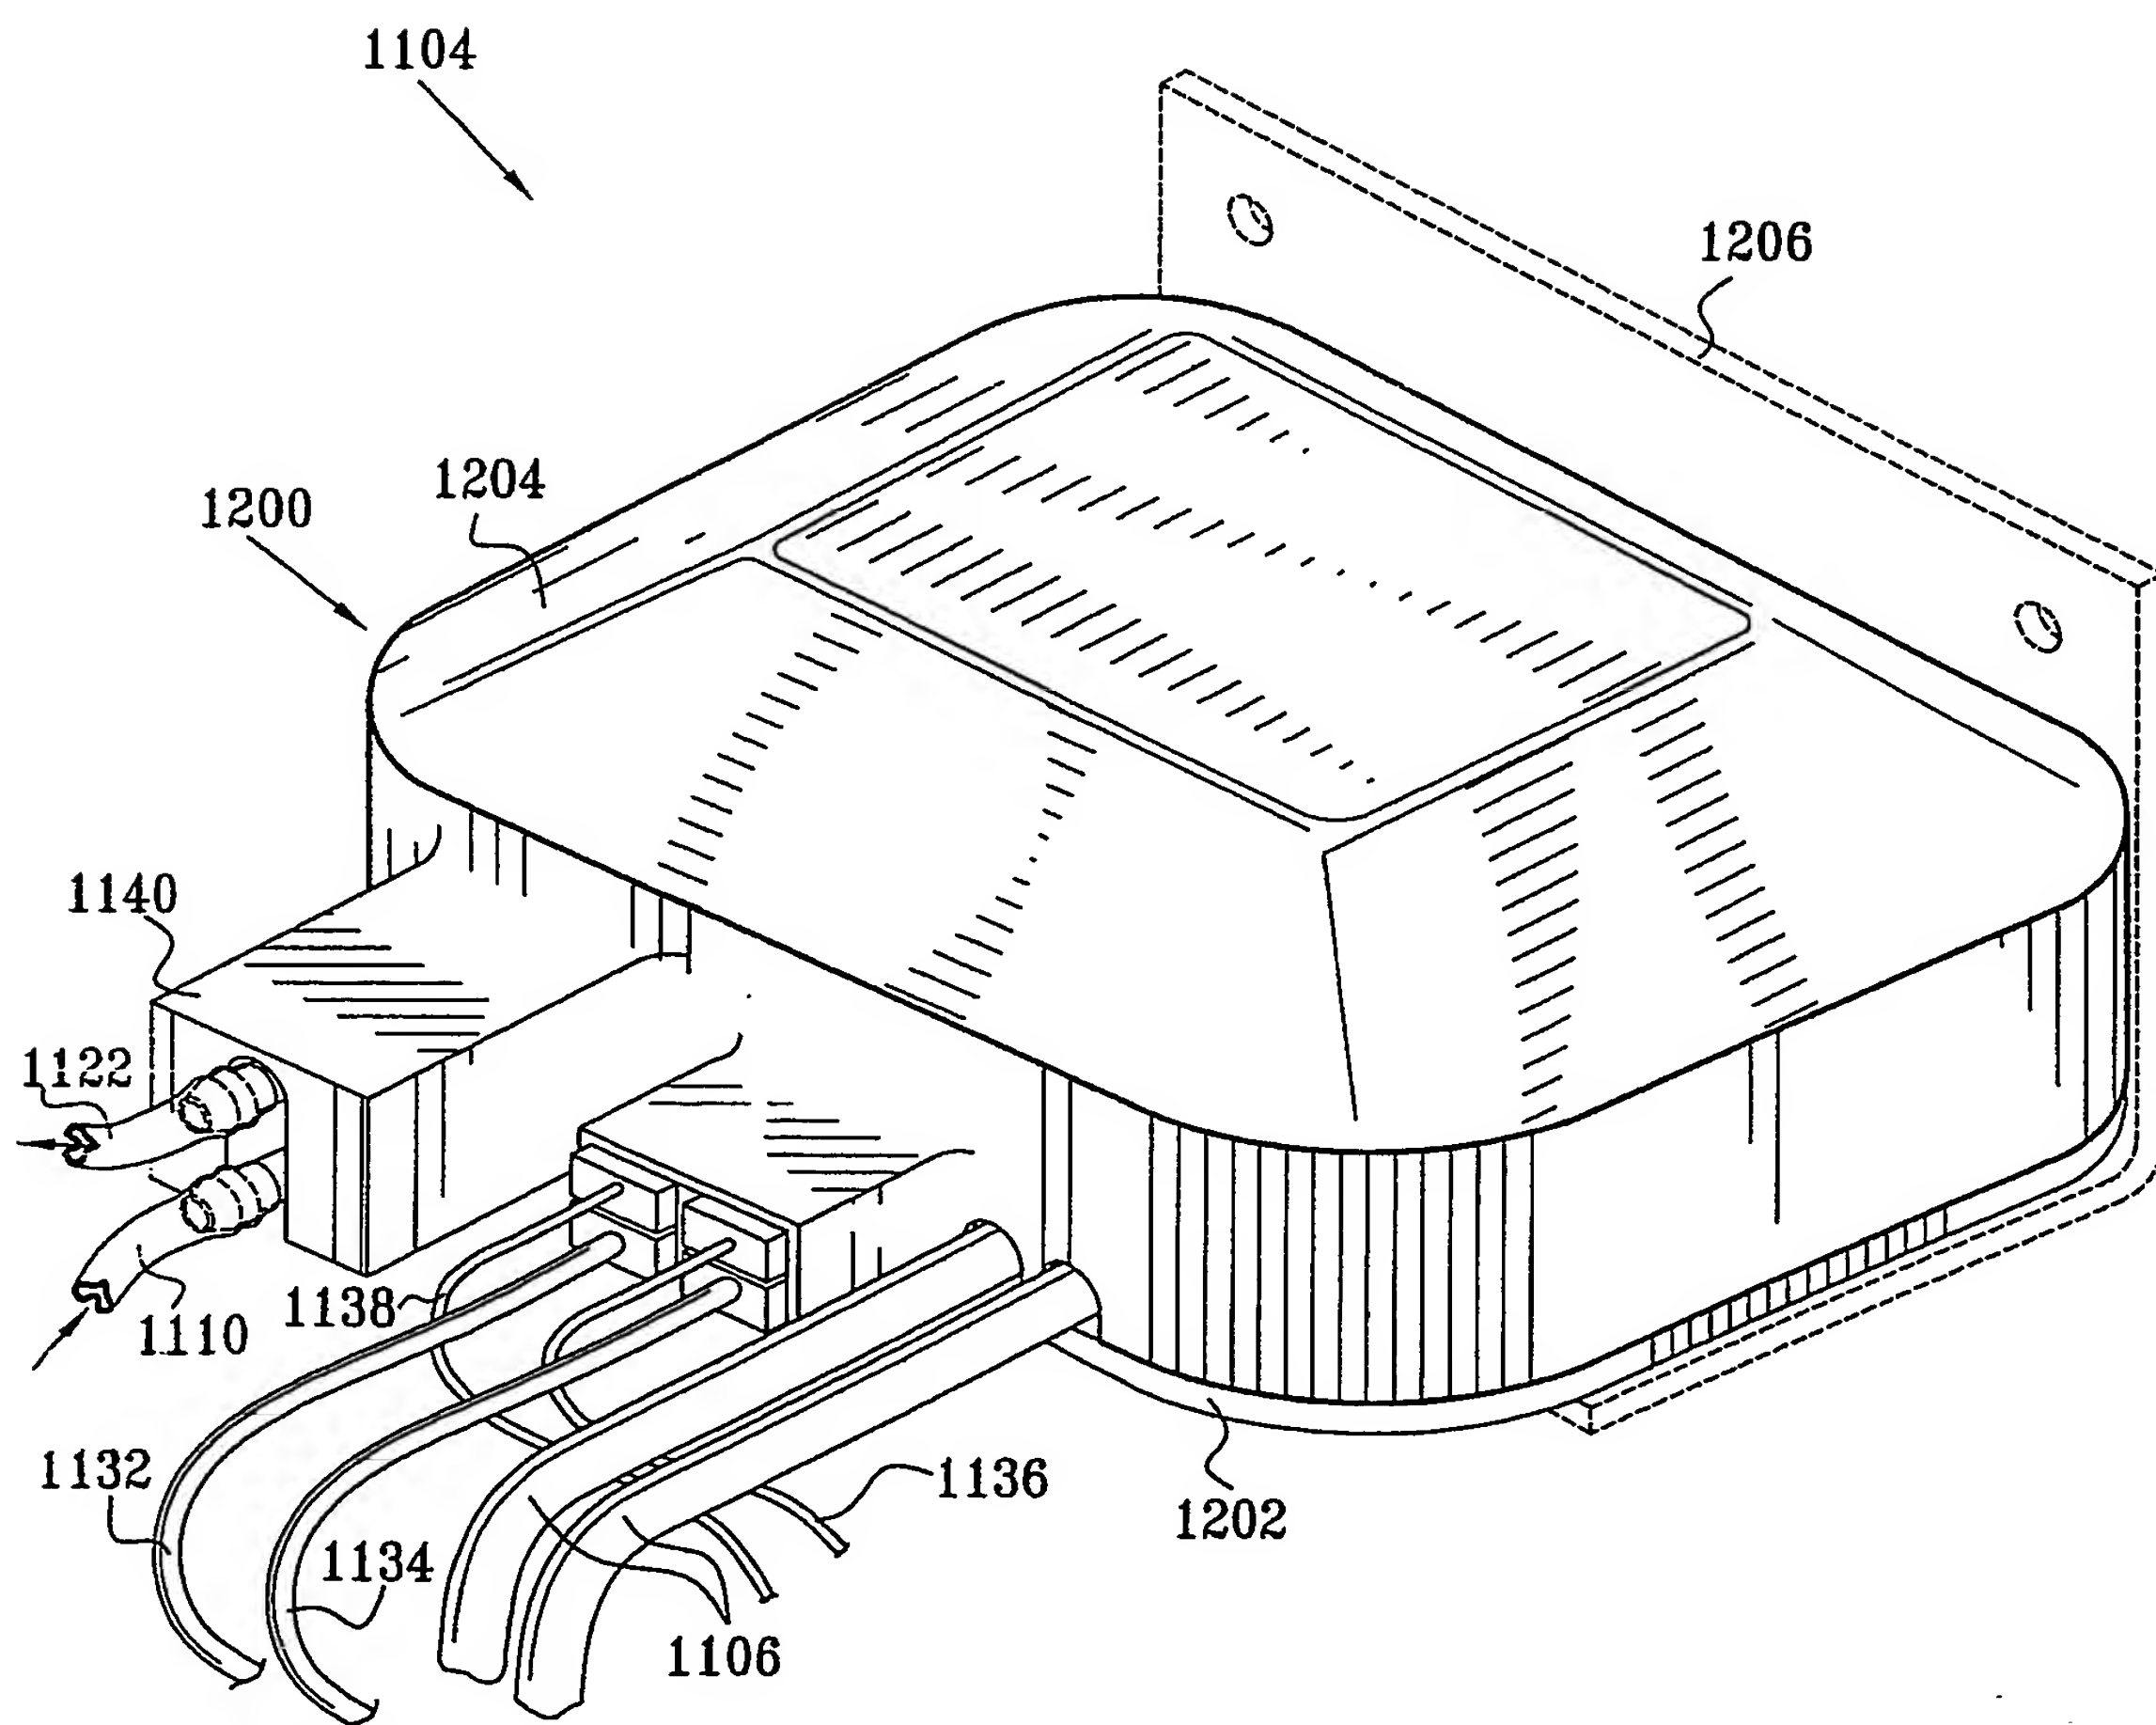


15/37

FIG. 13B

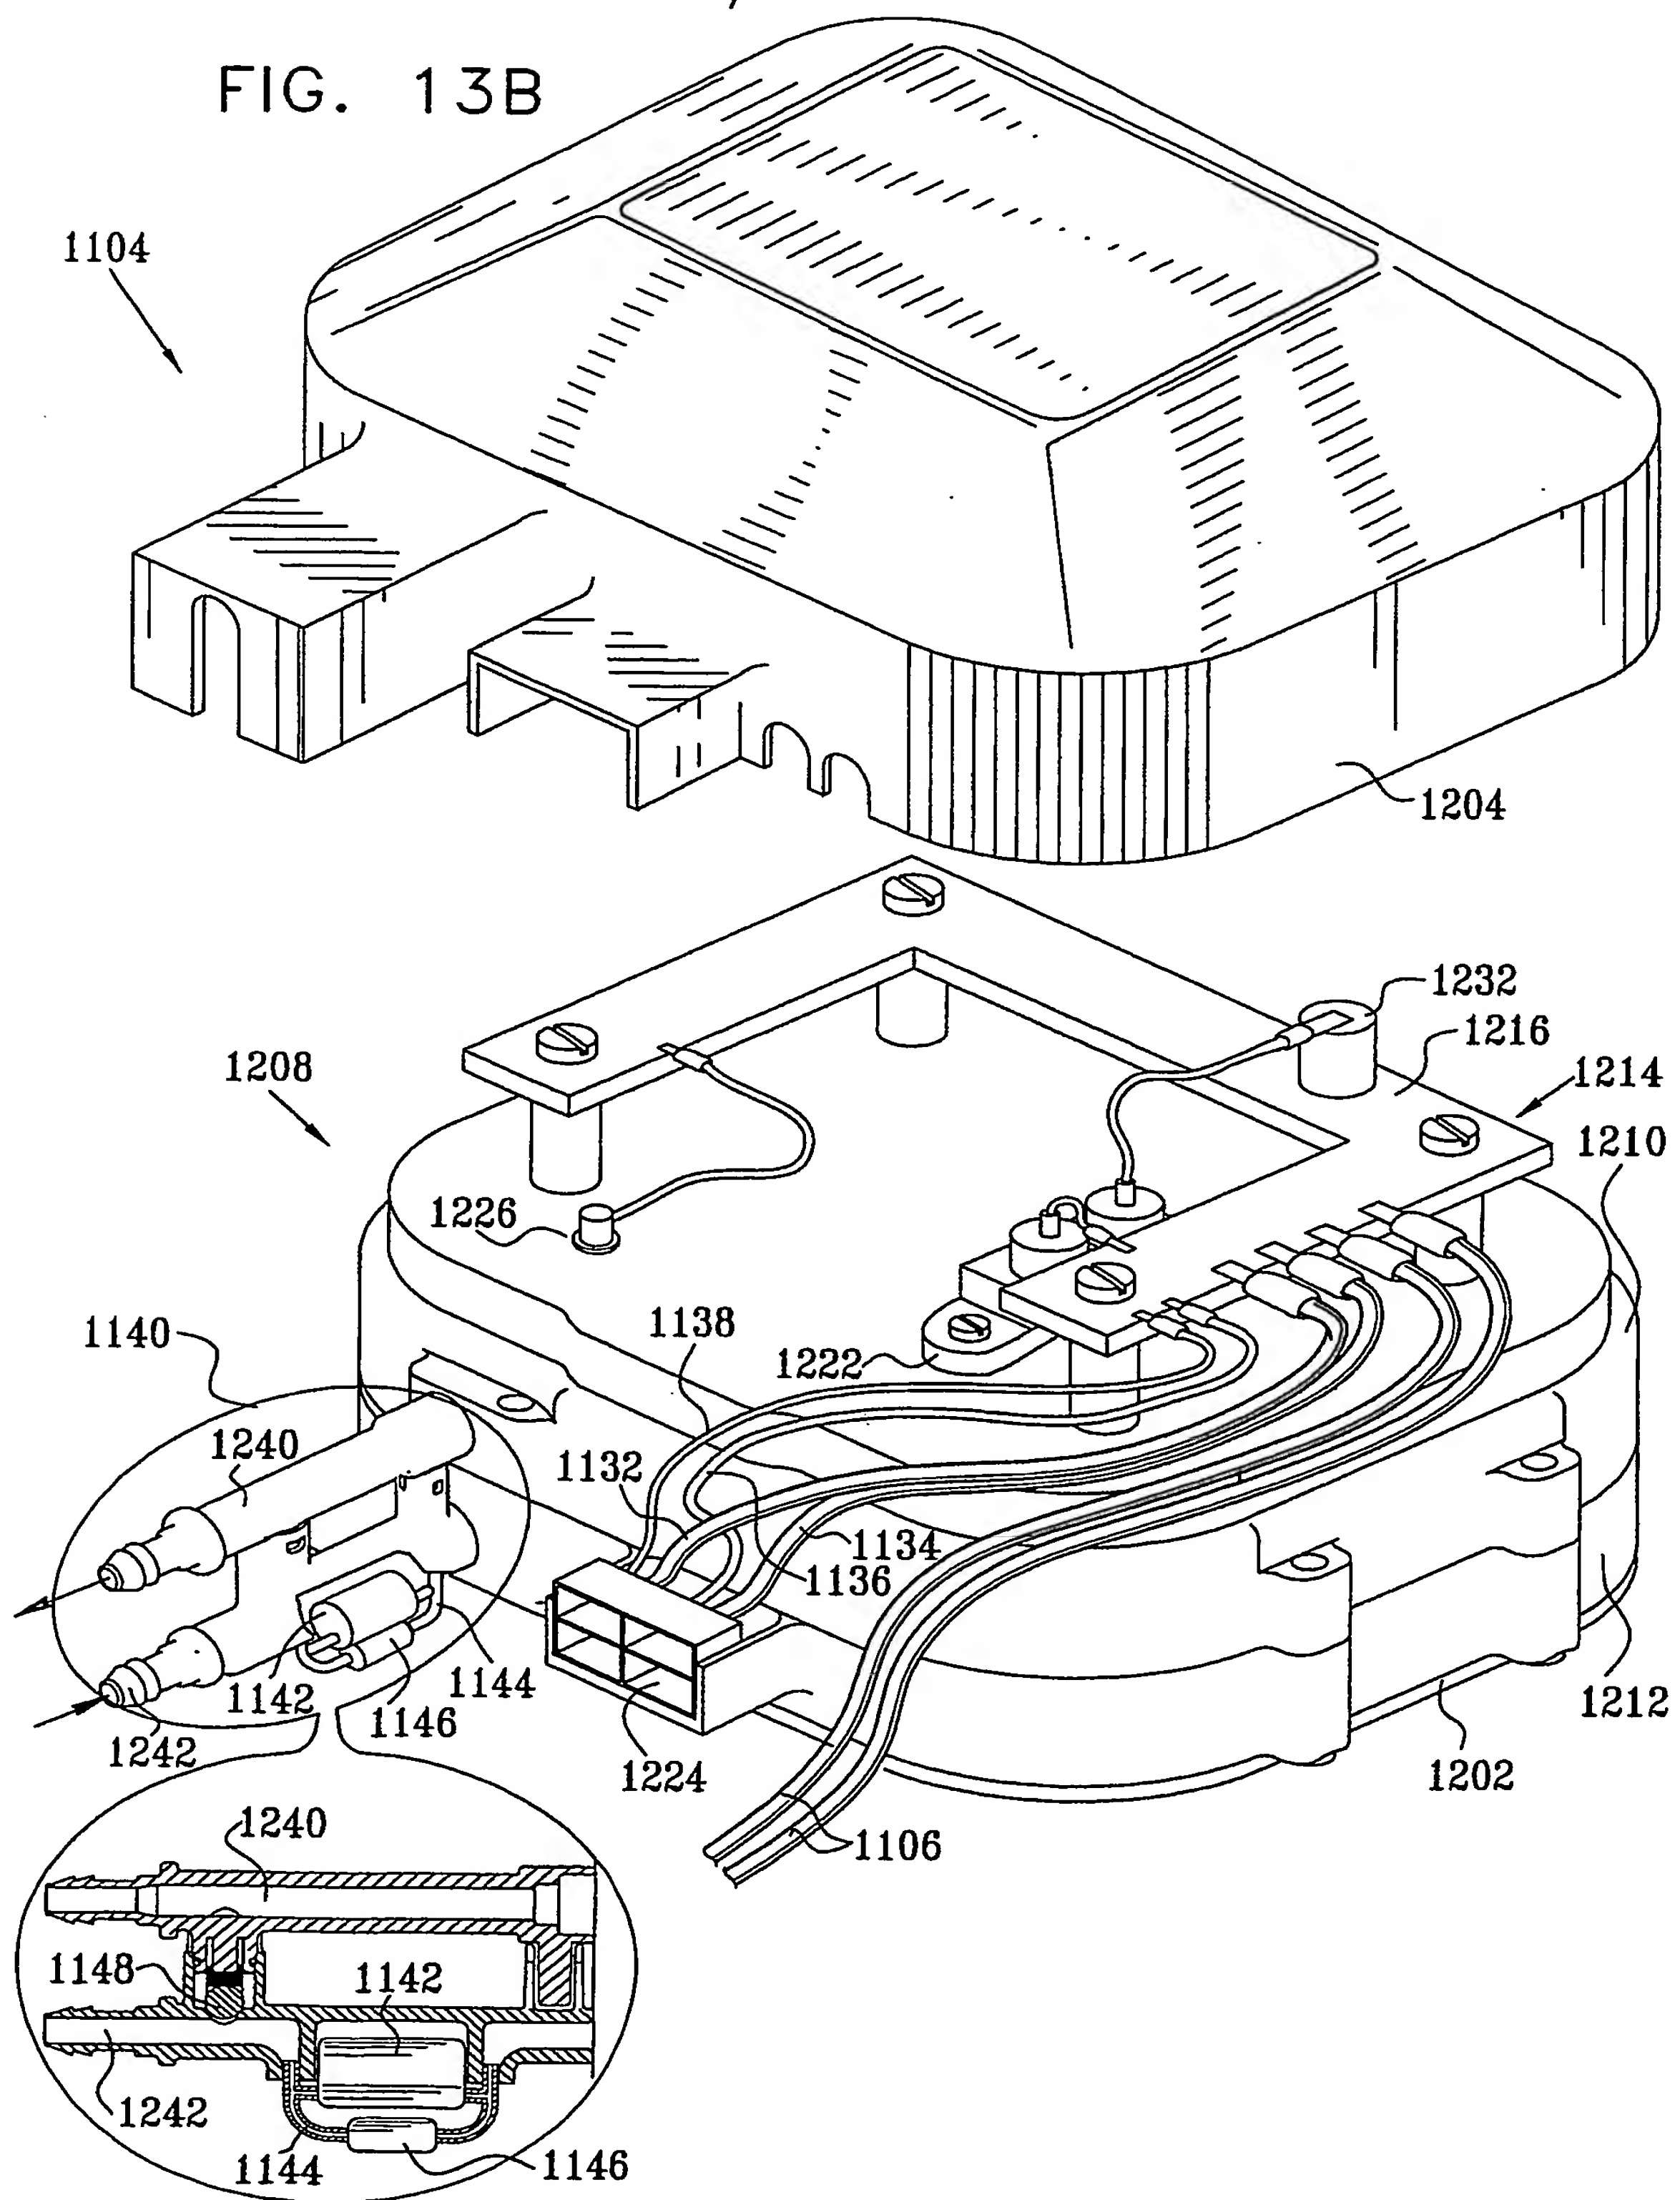

16/37

FIG. 14

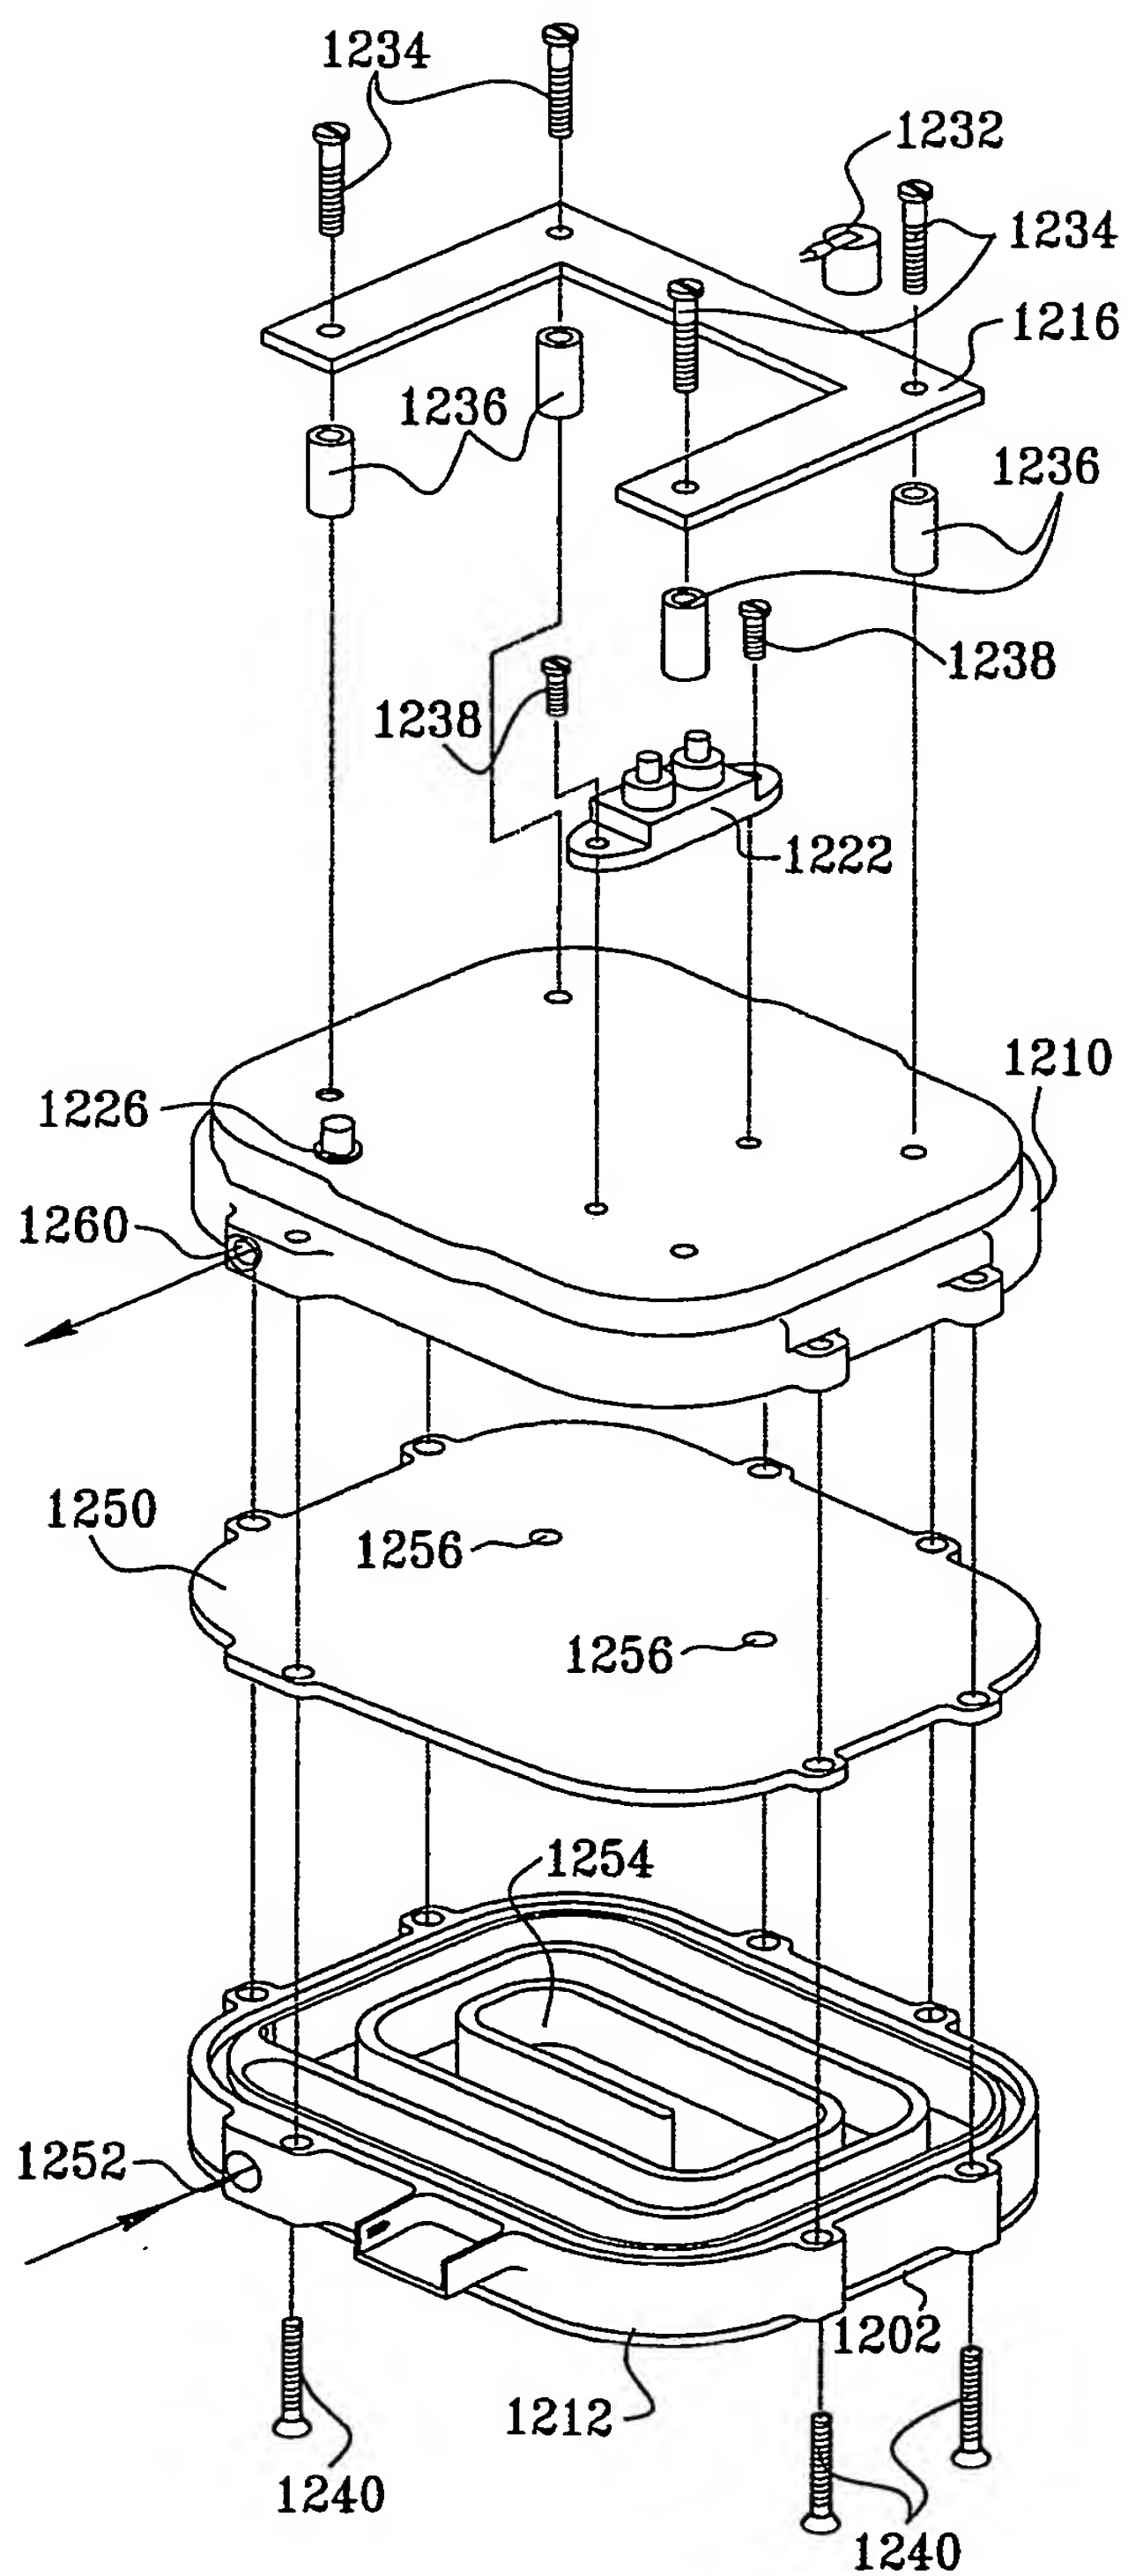

17/37

VEHICLE RADAR

ACTUATION

SWITCH 1130

HEATING

ELEMENT

1222

DEPOSITS

AGC

PUMP
1114,1142

[AMP]

65°C

55°C

40°C


20°C


0°C

-10°C

FIG. 15


TIME

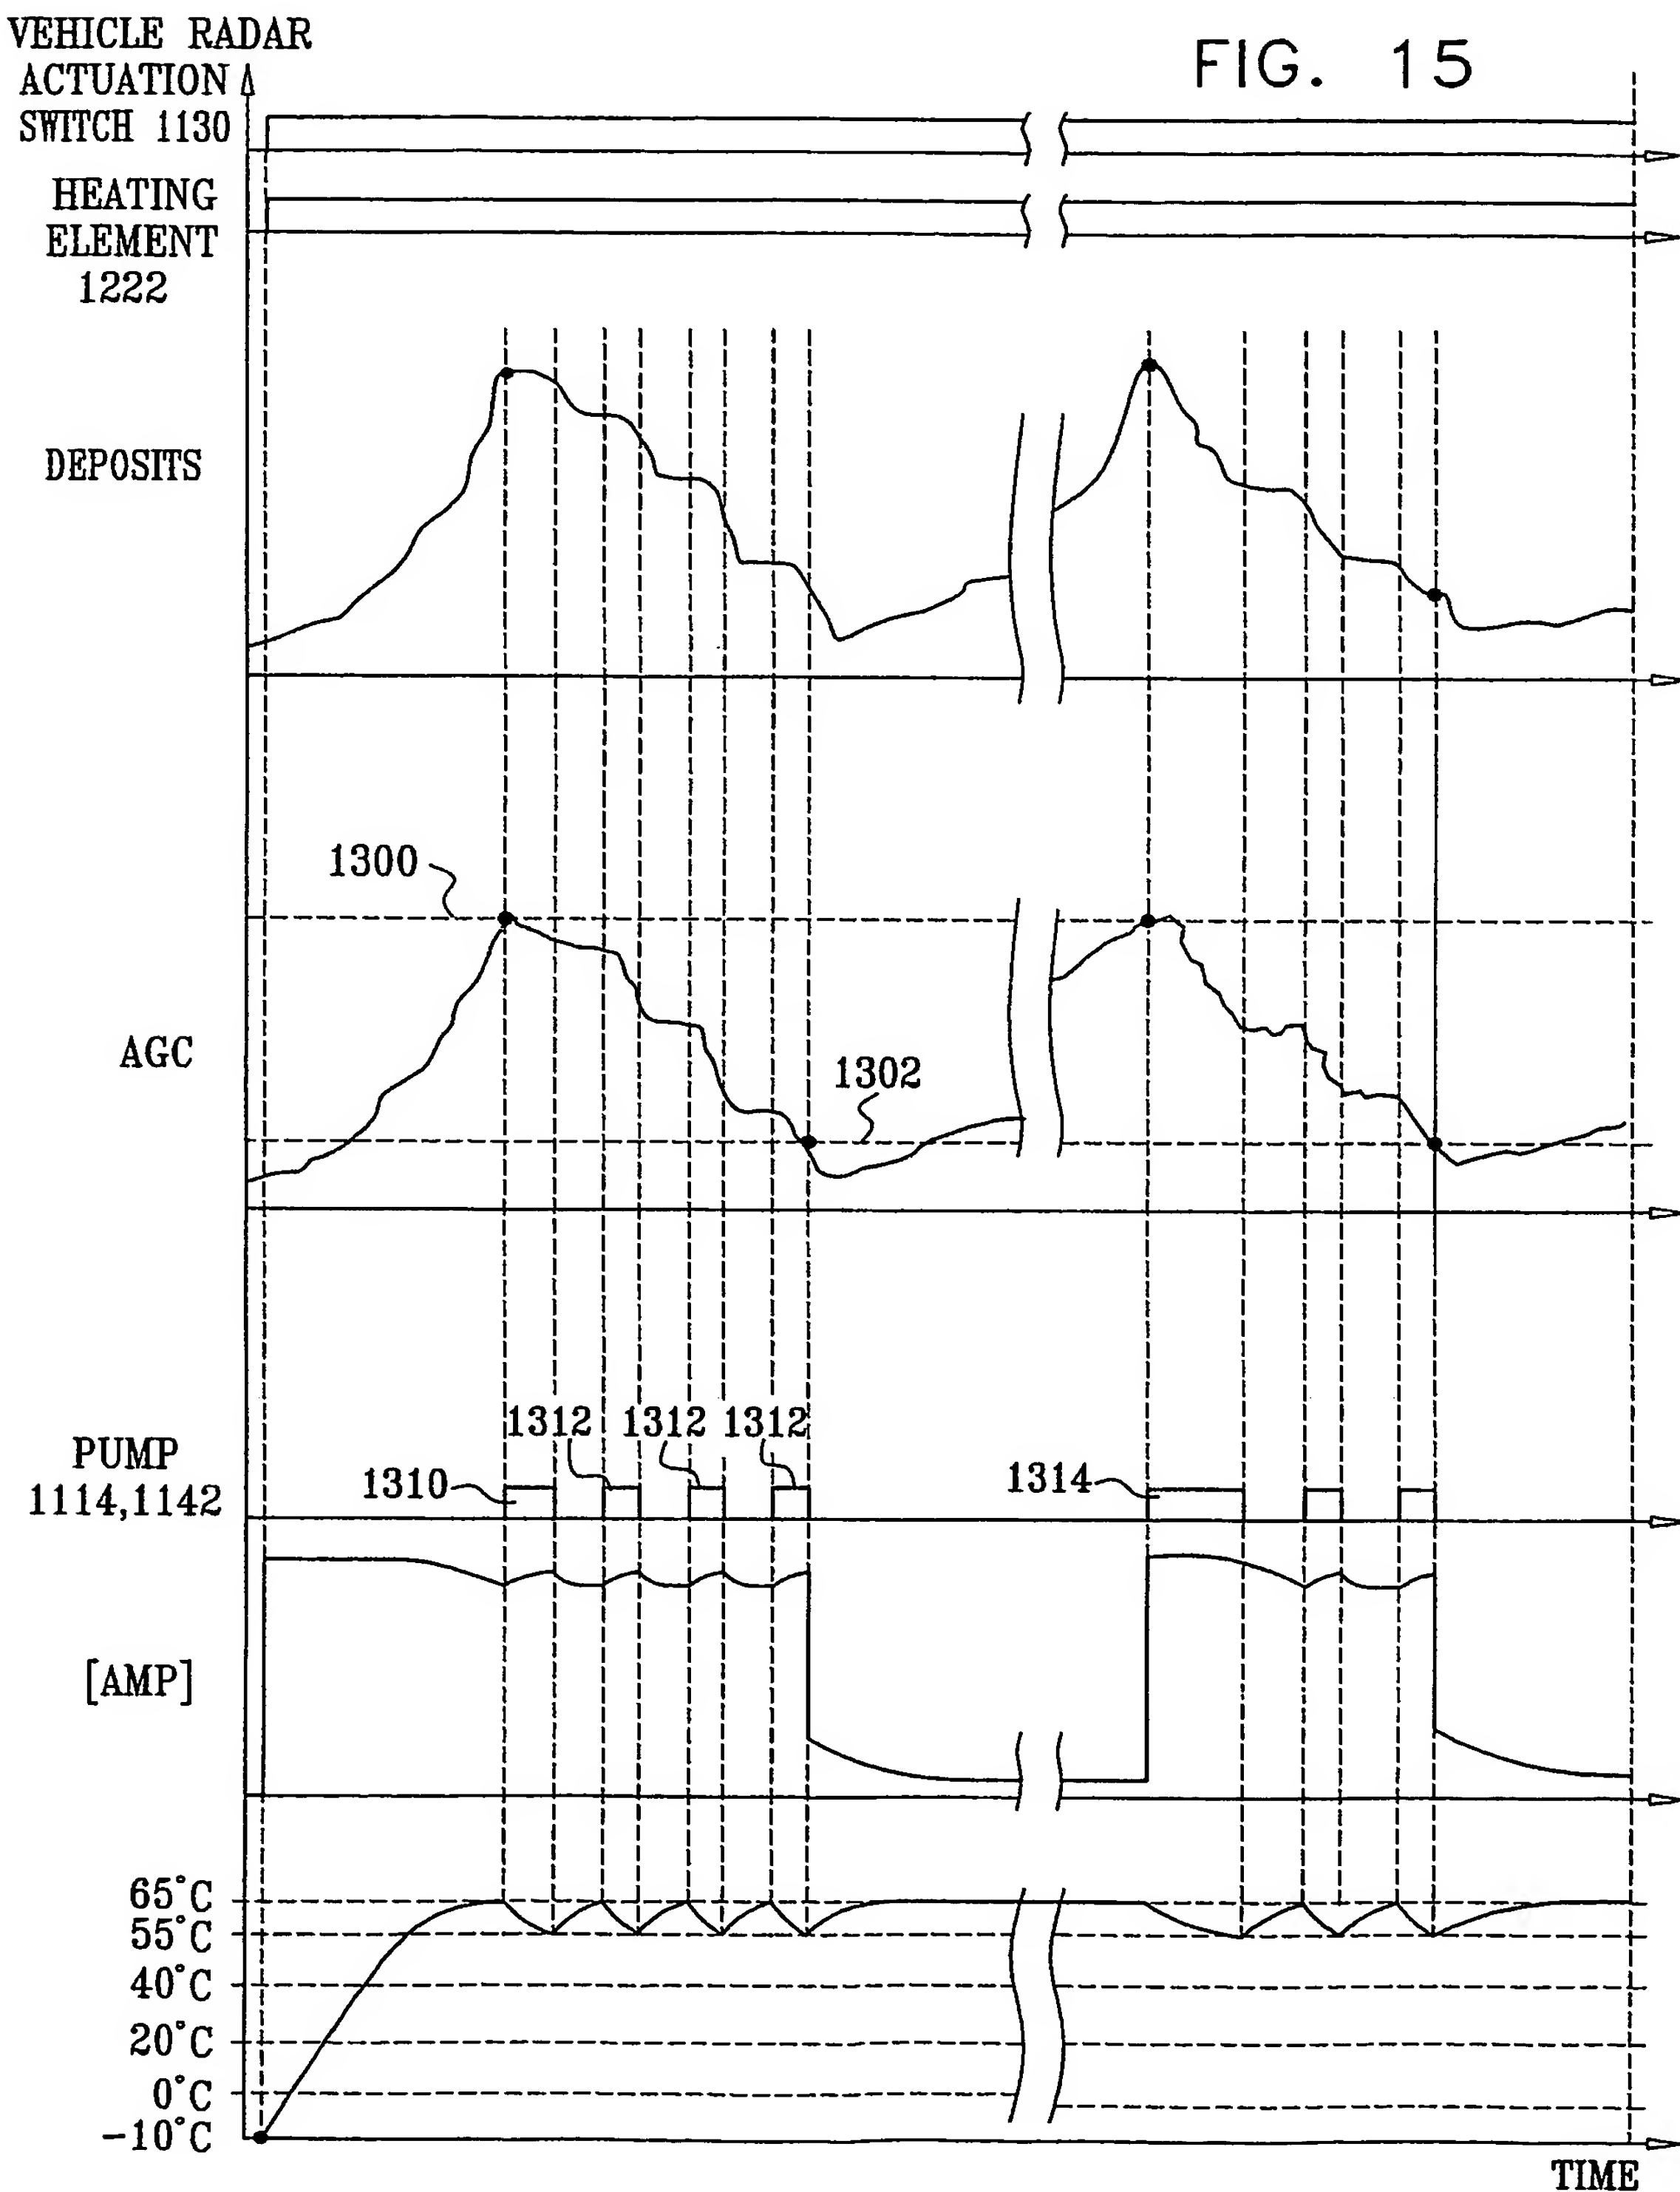

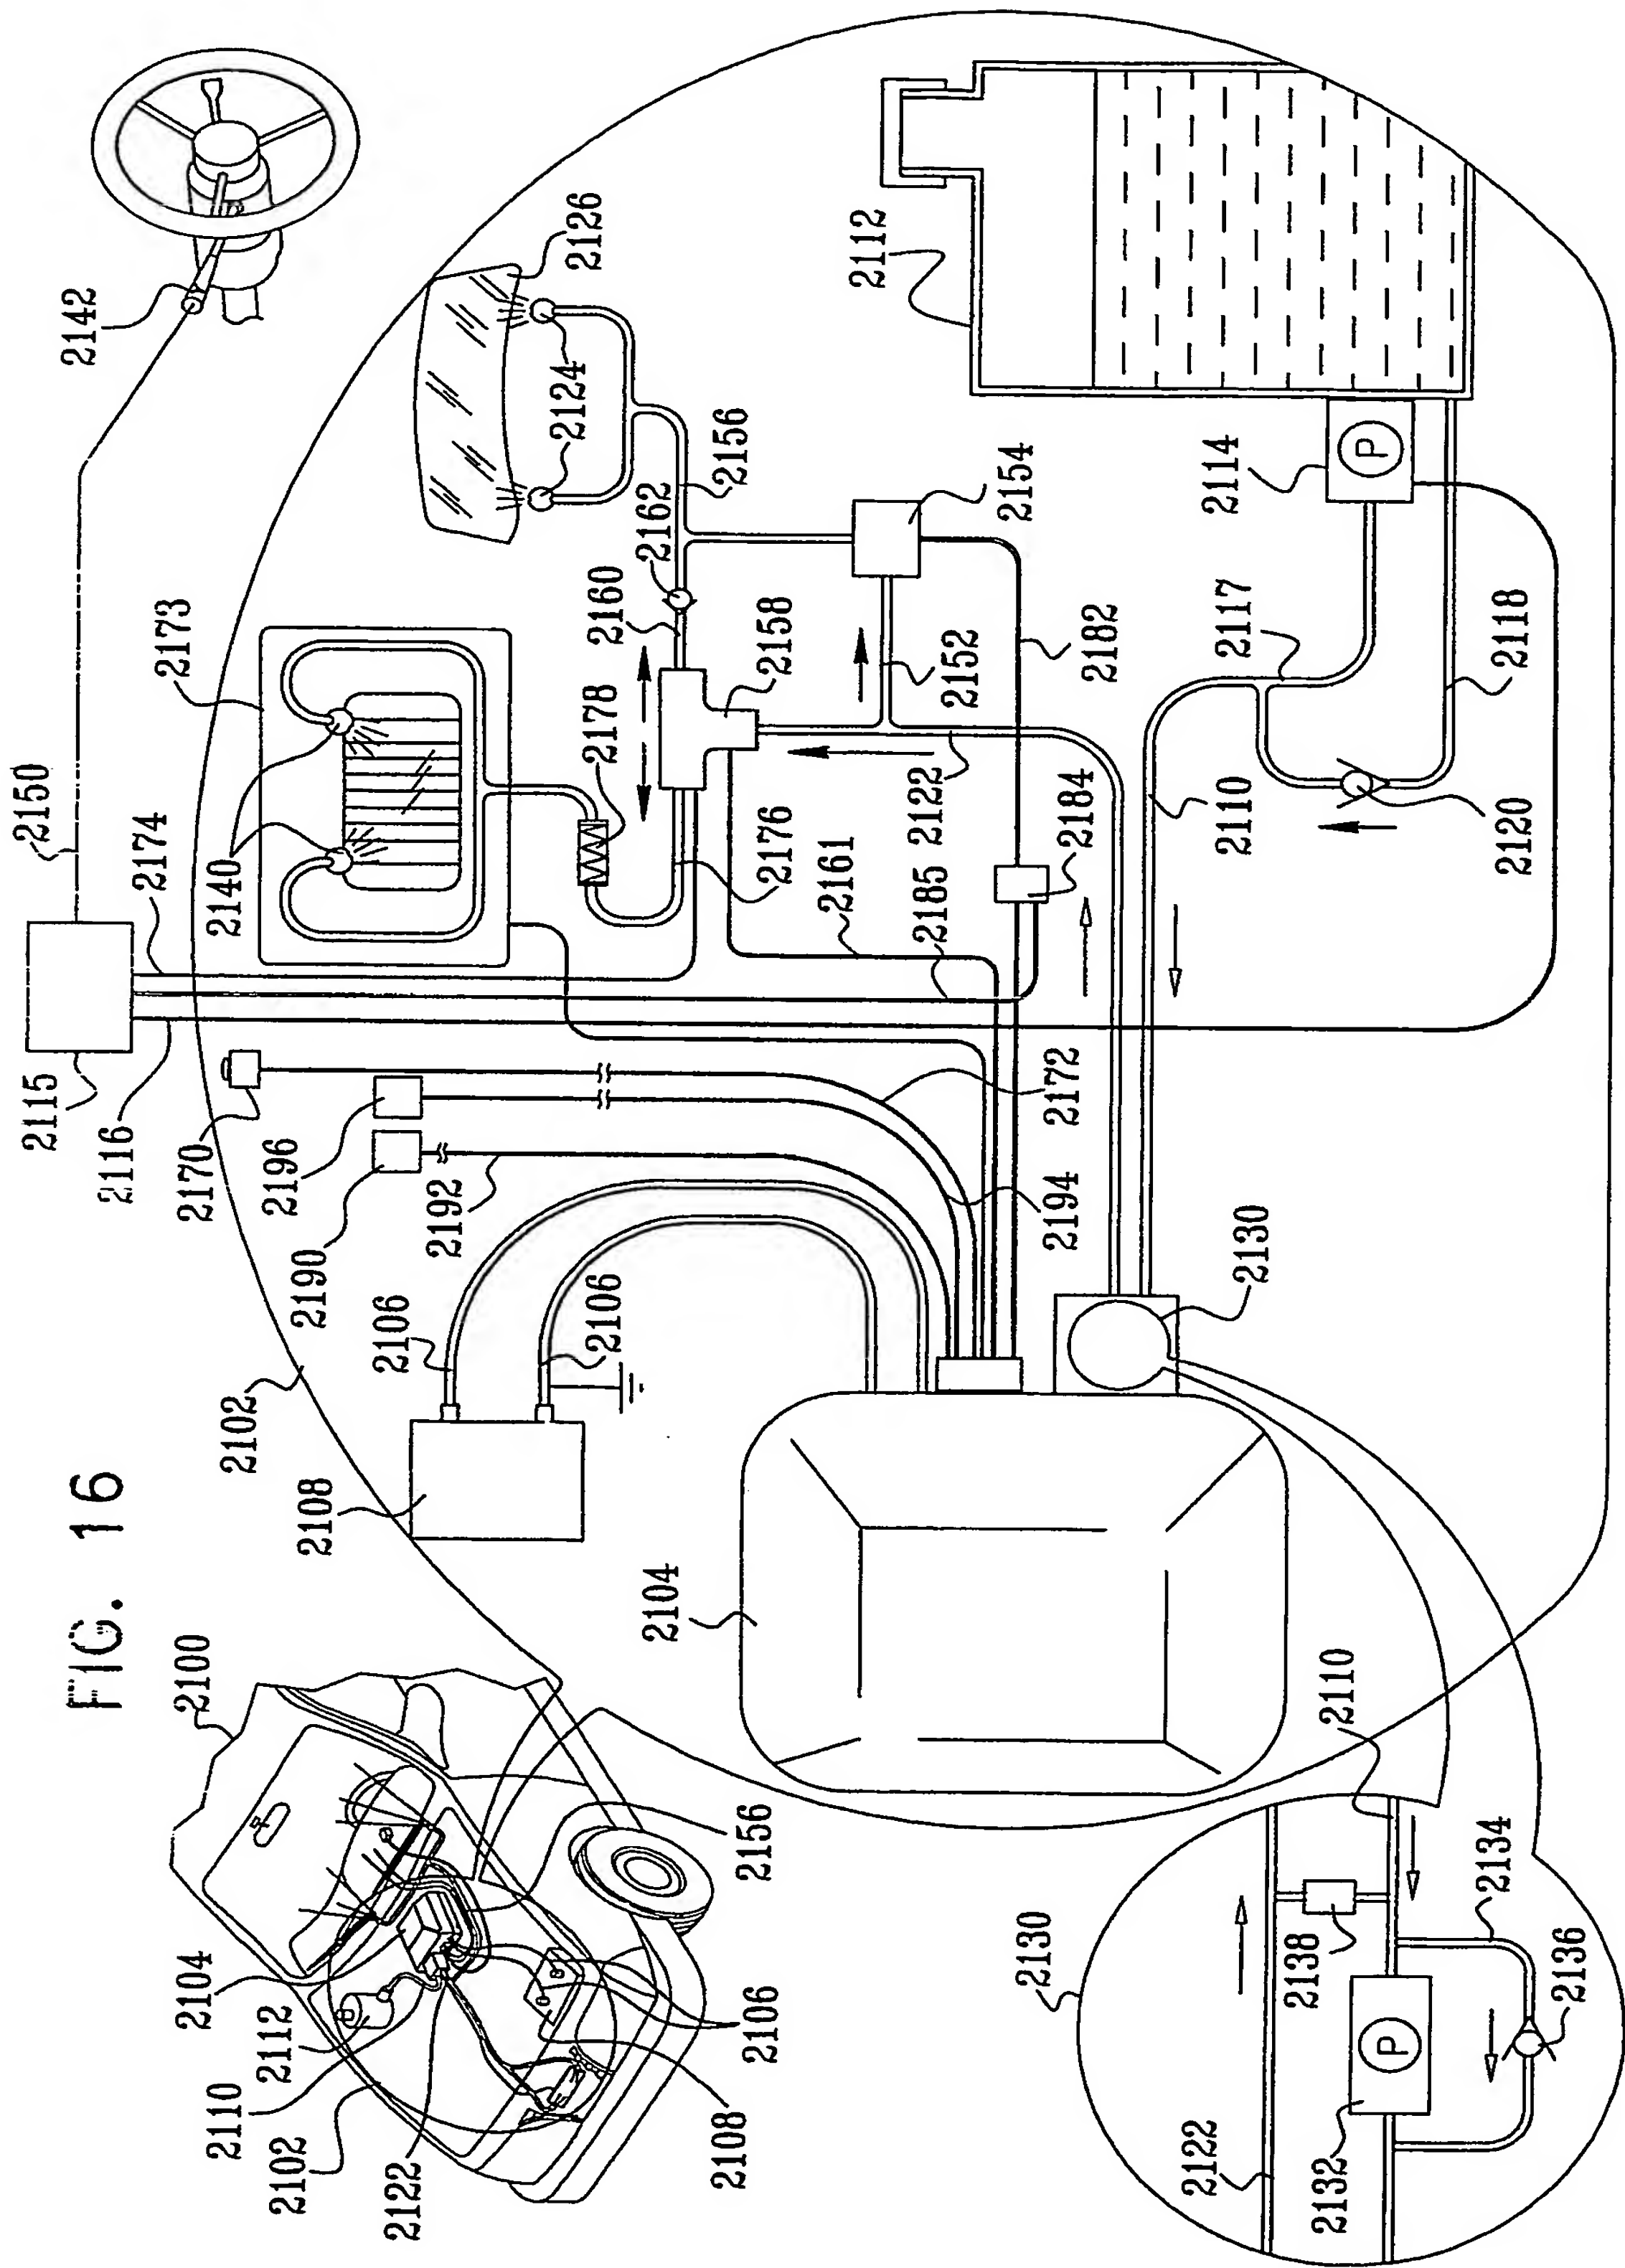

19/37

FIG. 17A

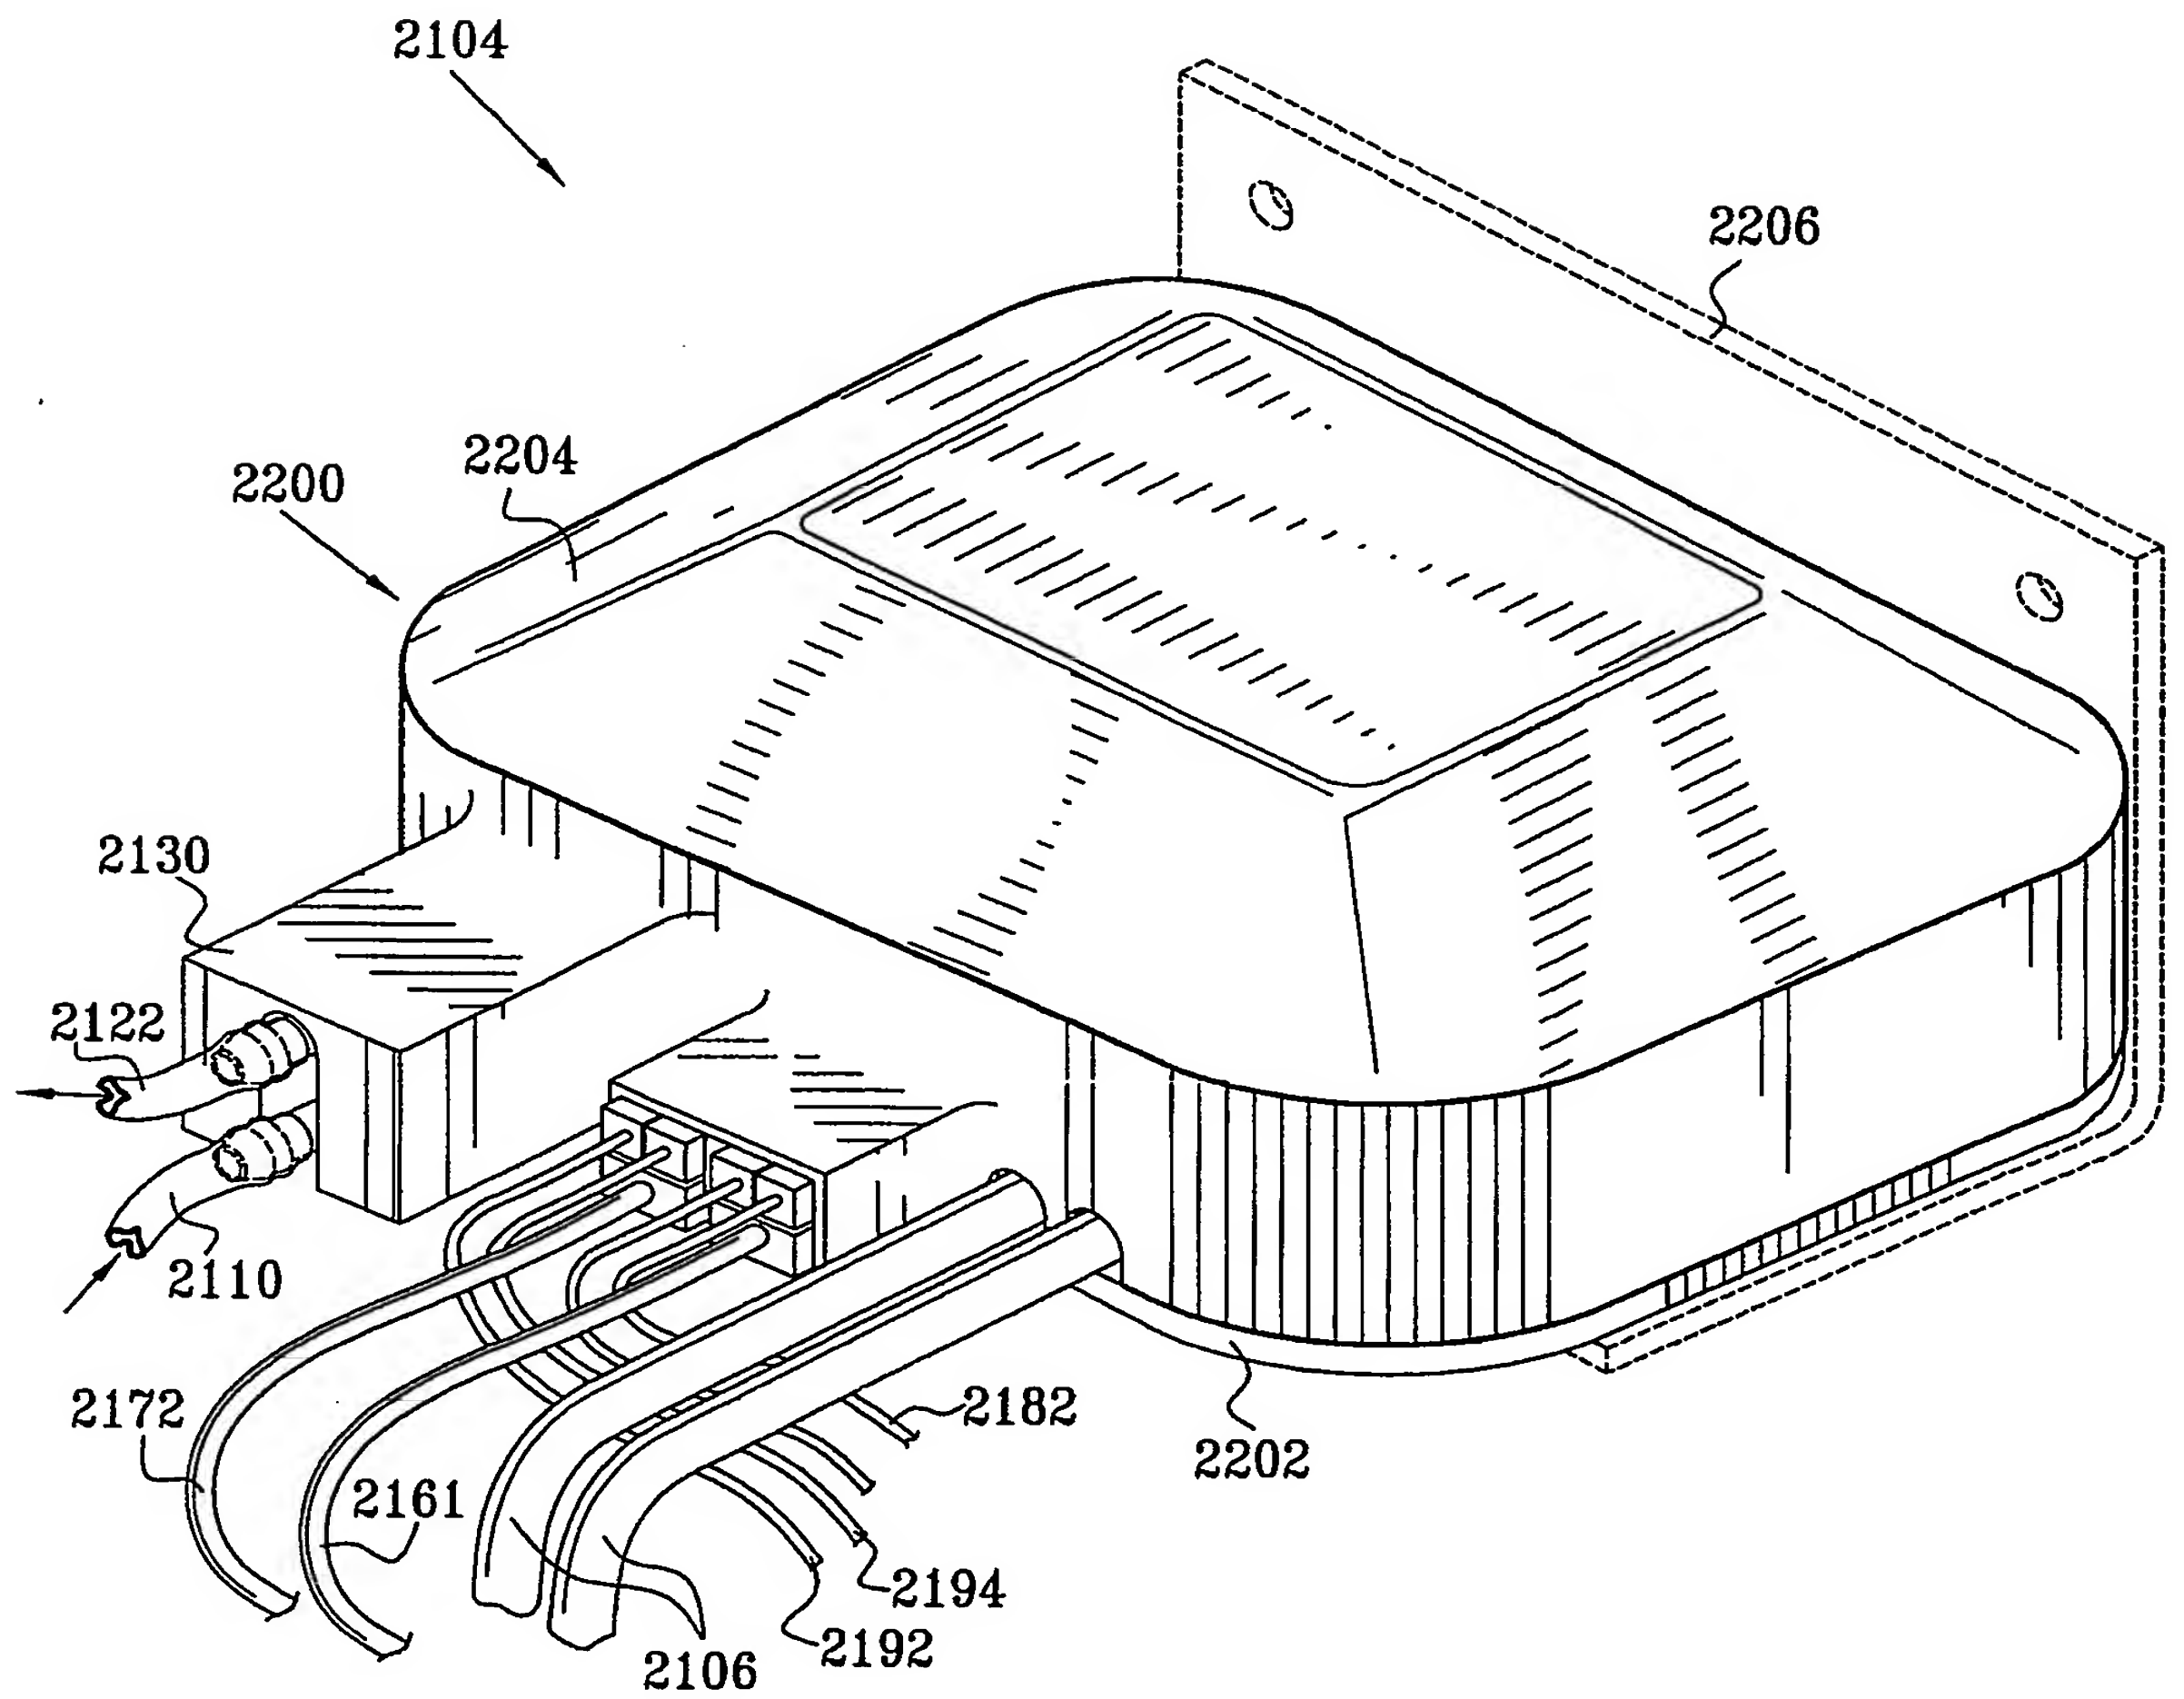

20/37

FIG. 17B



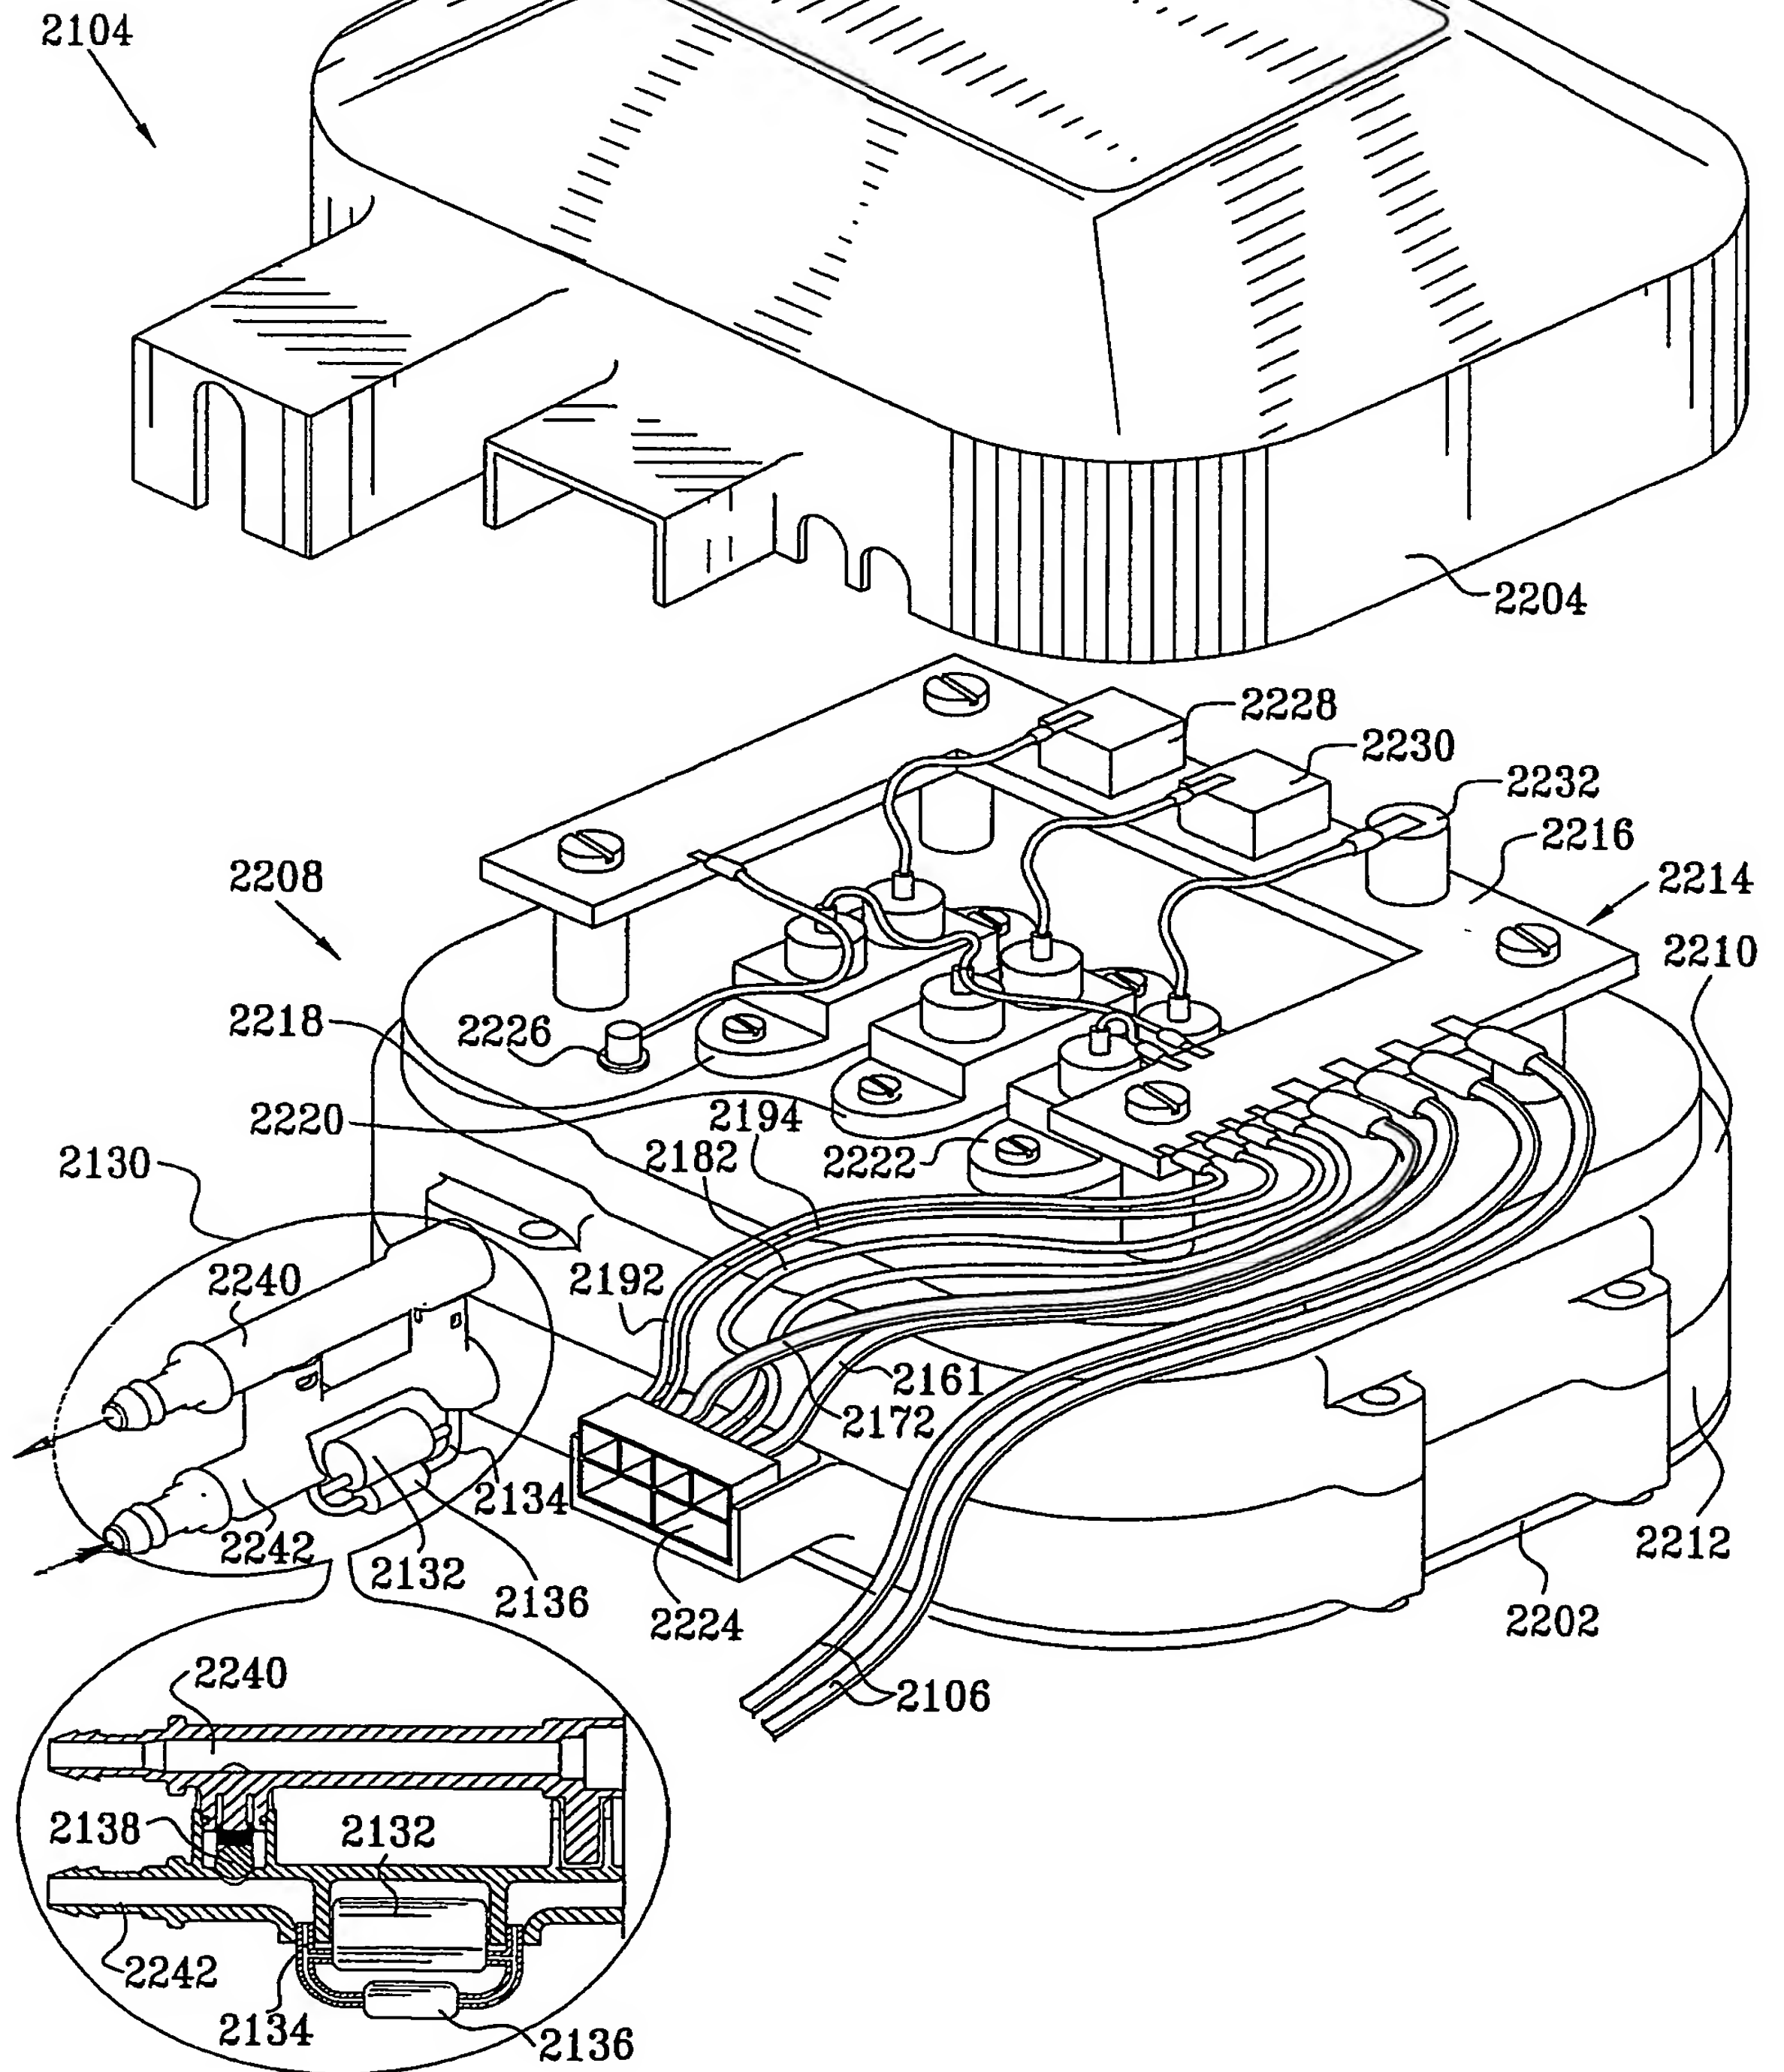


FIG. 18

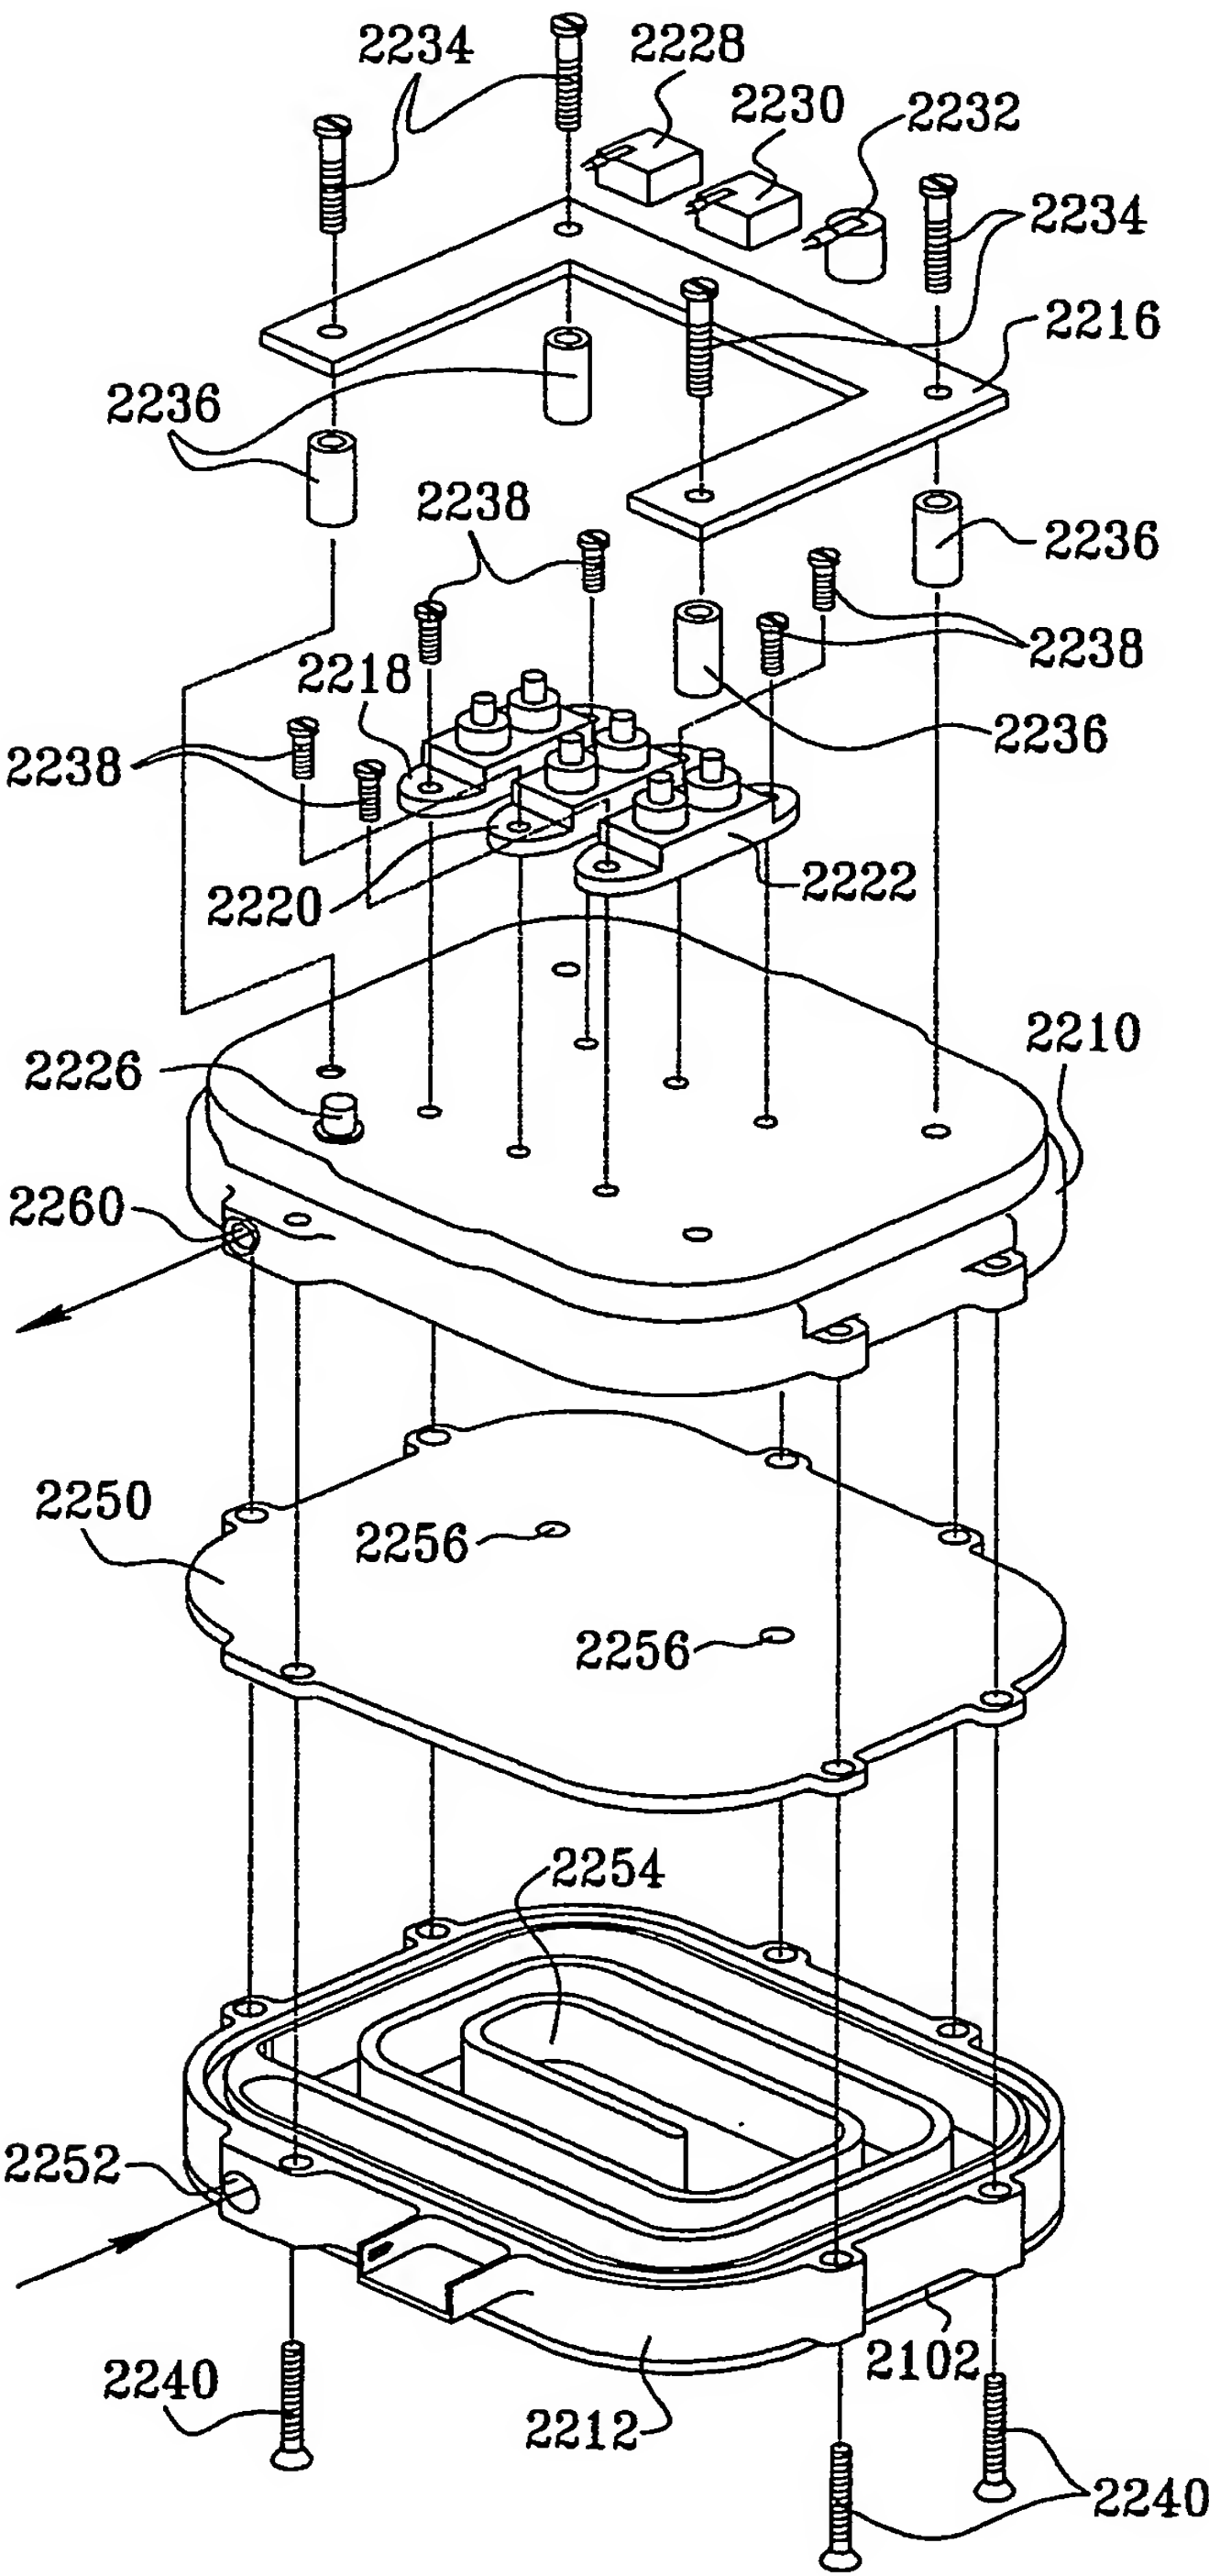

22/37

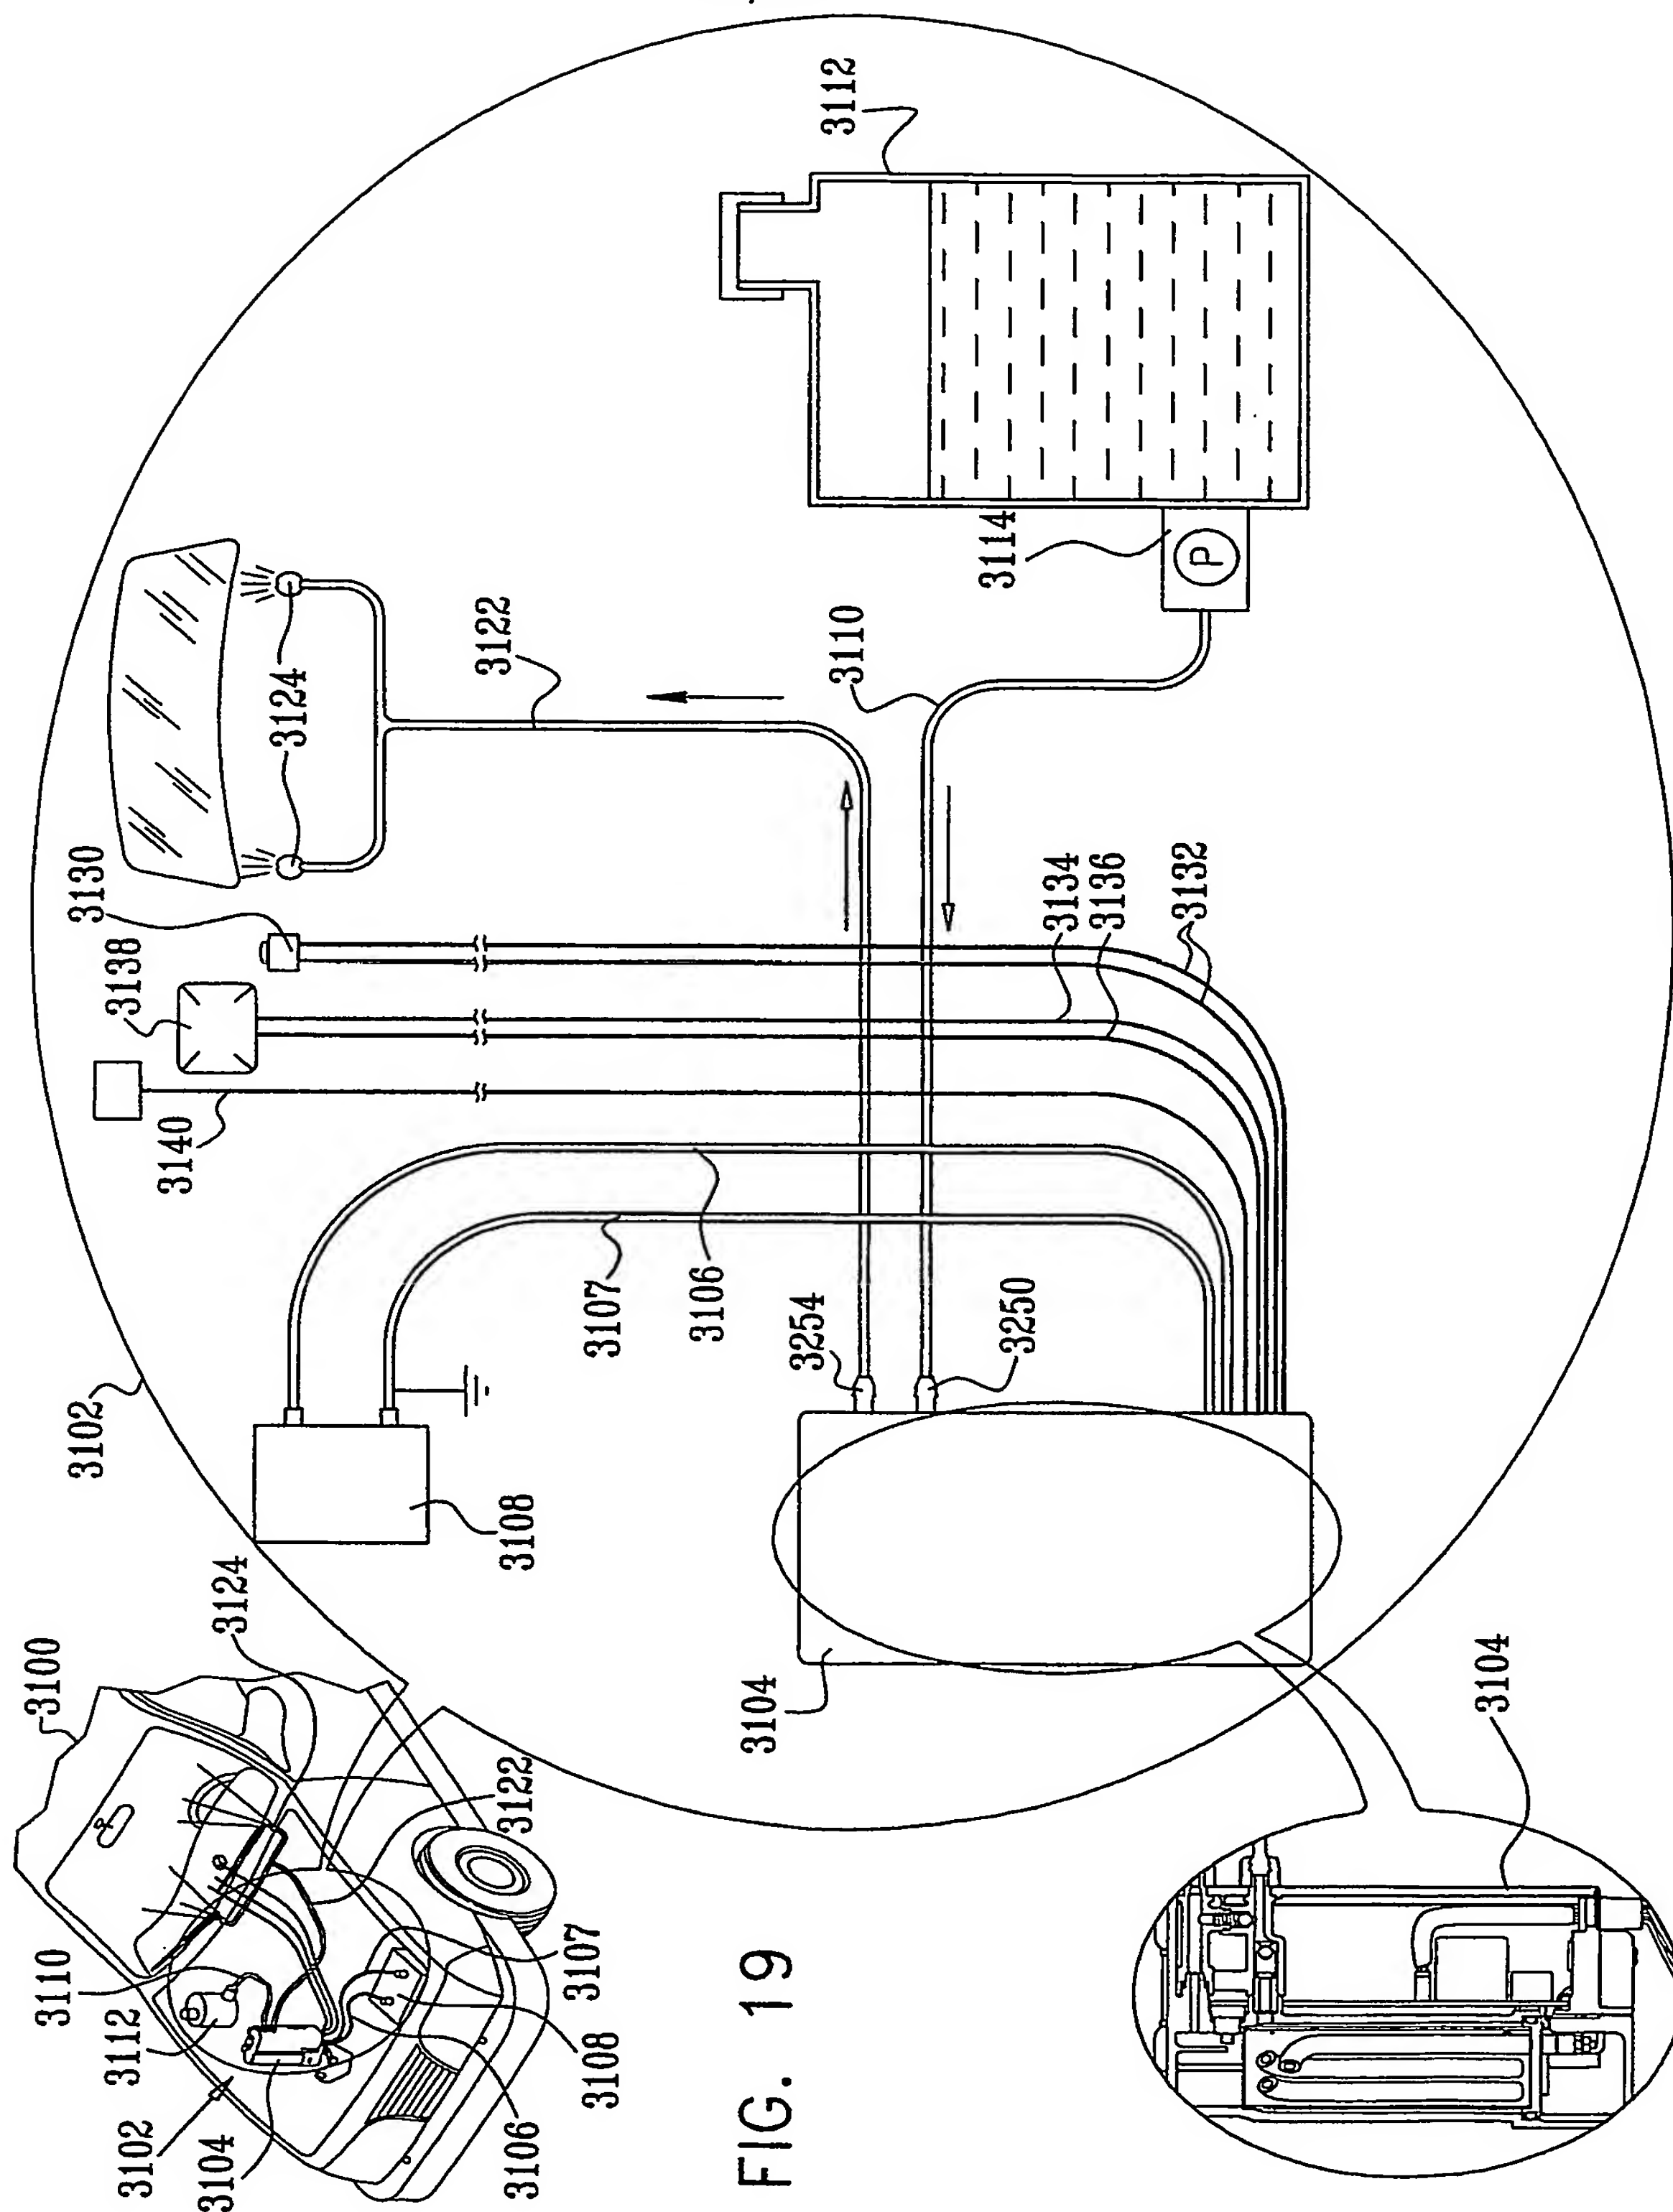

23/37


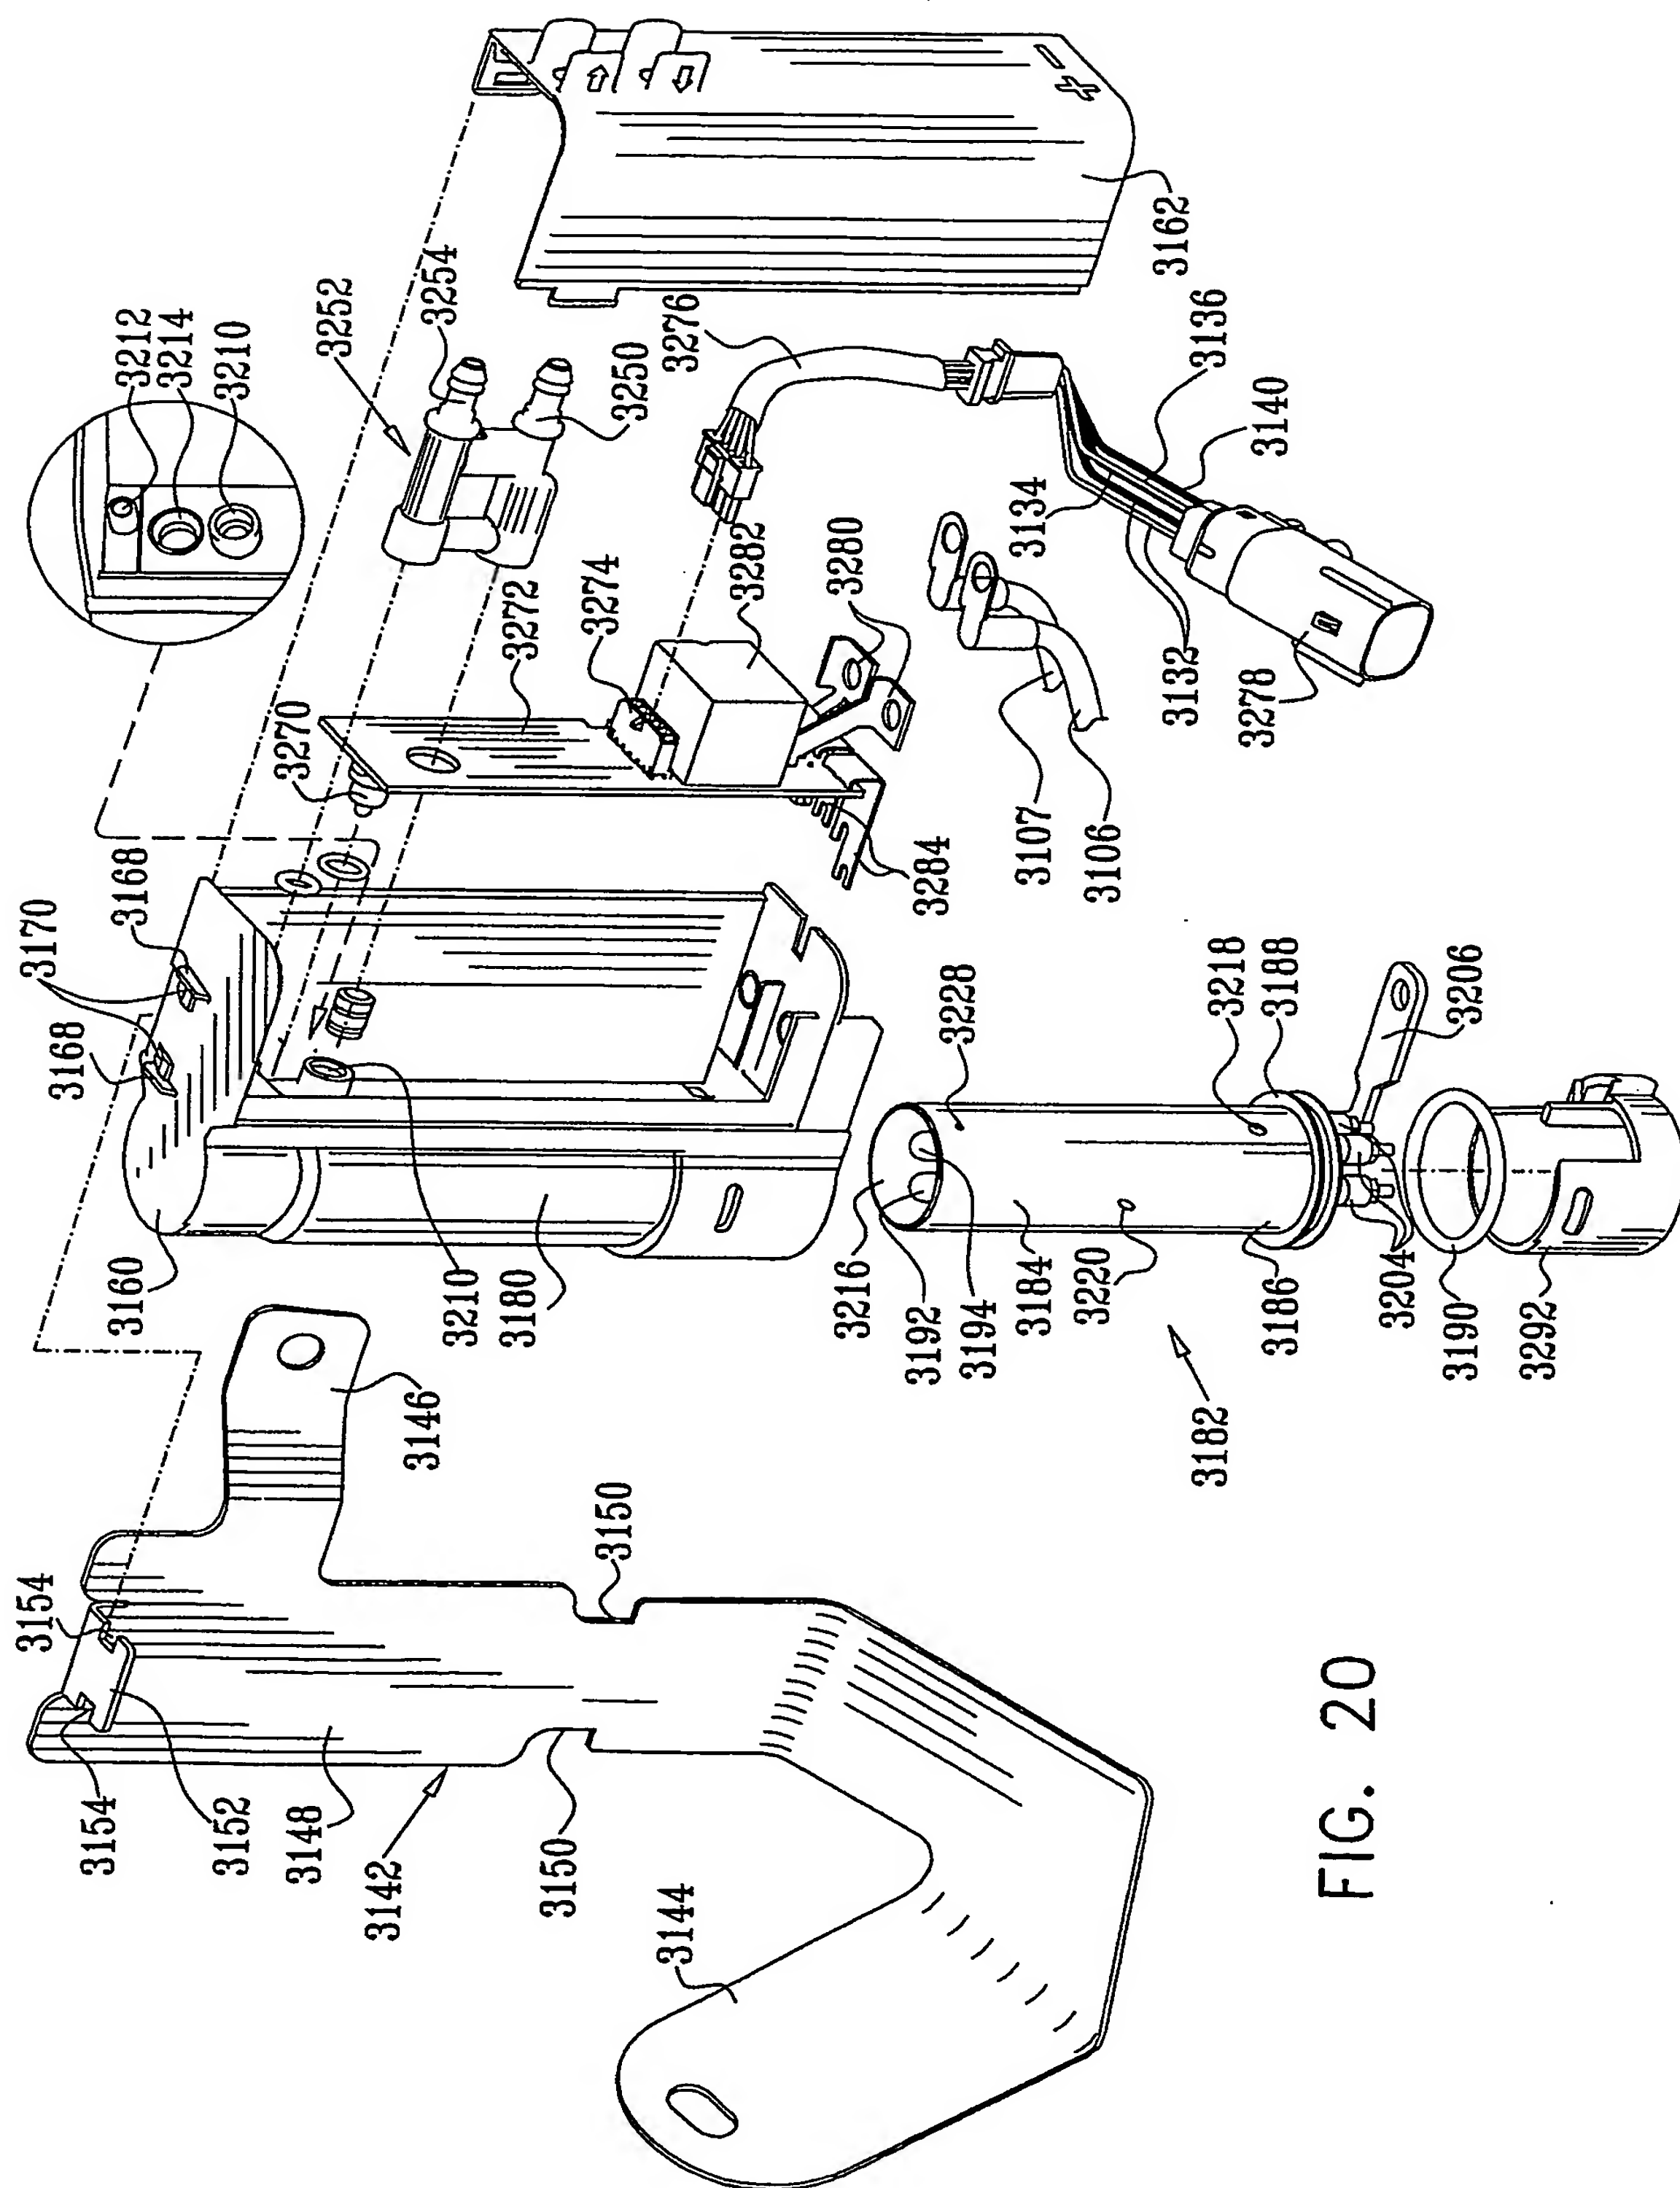



FIG. 20

24/37

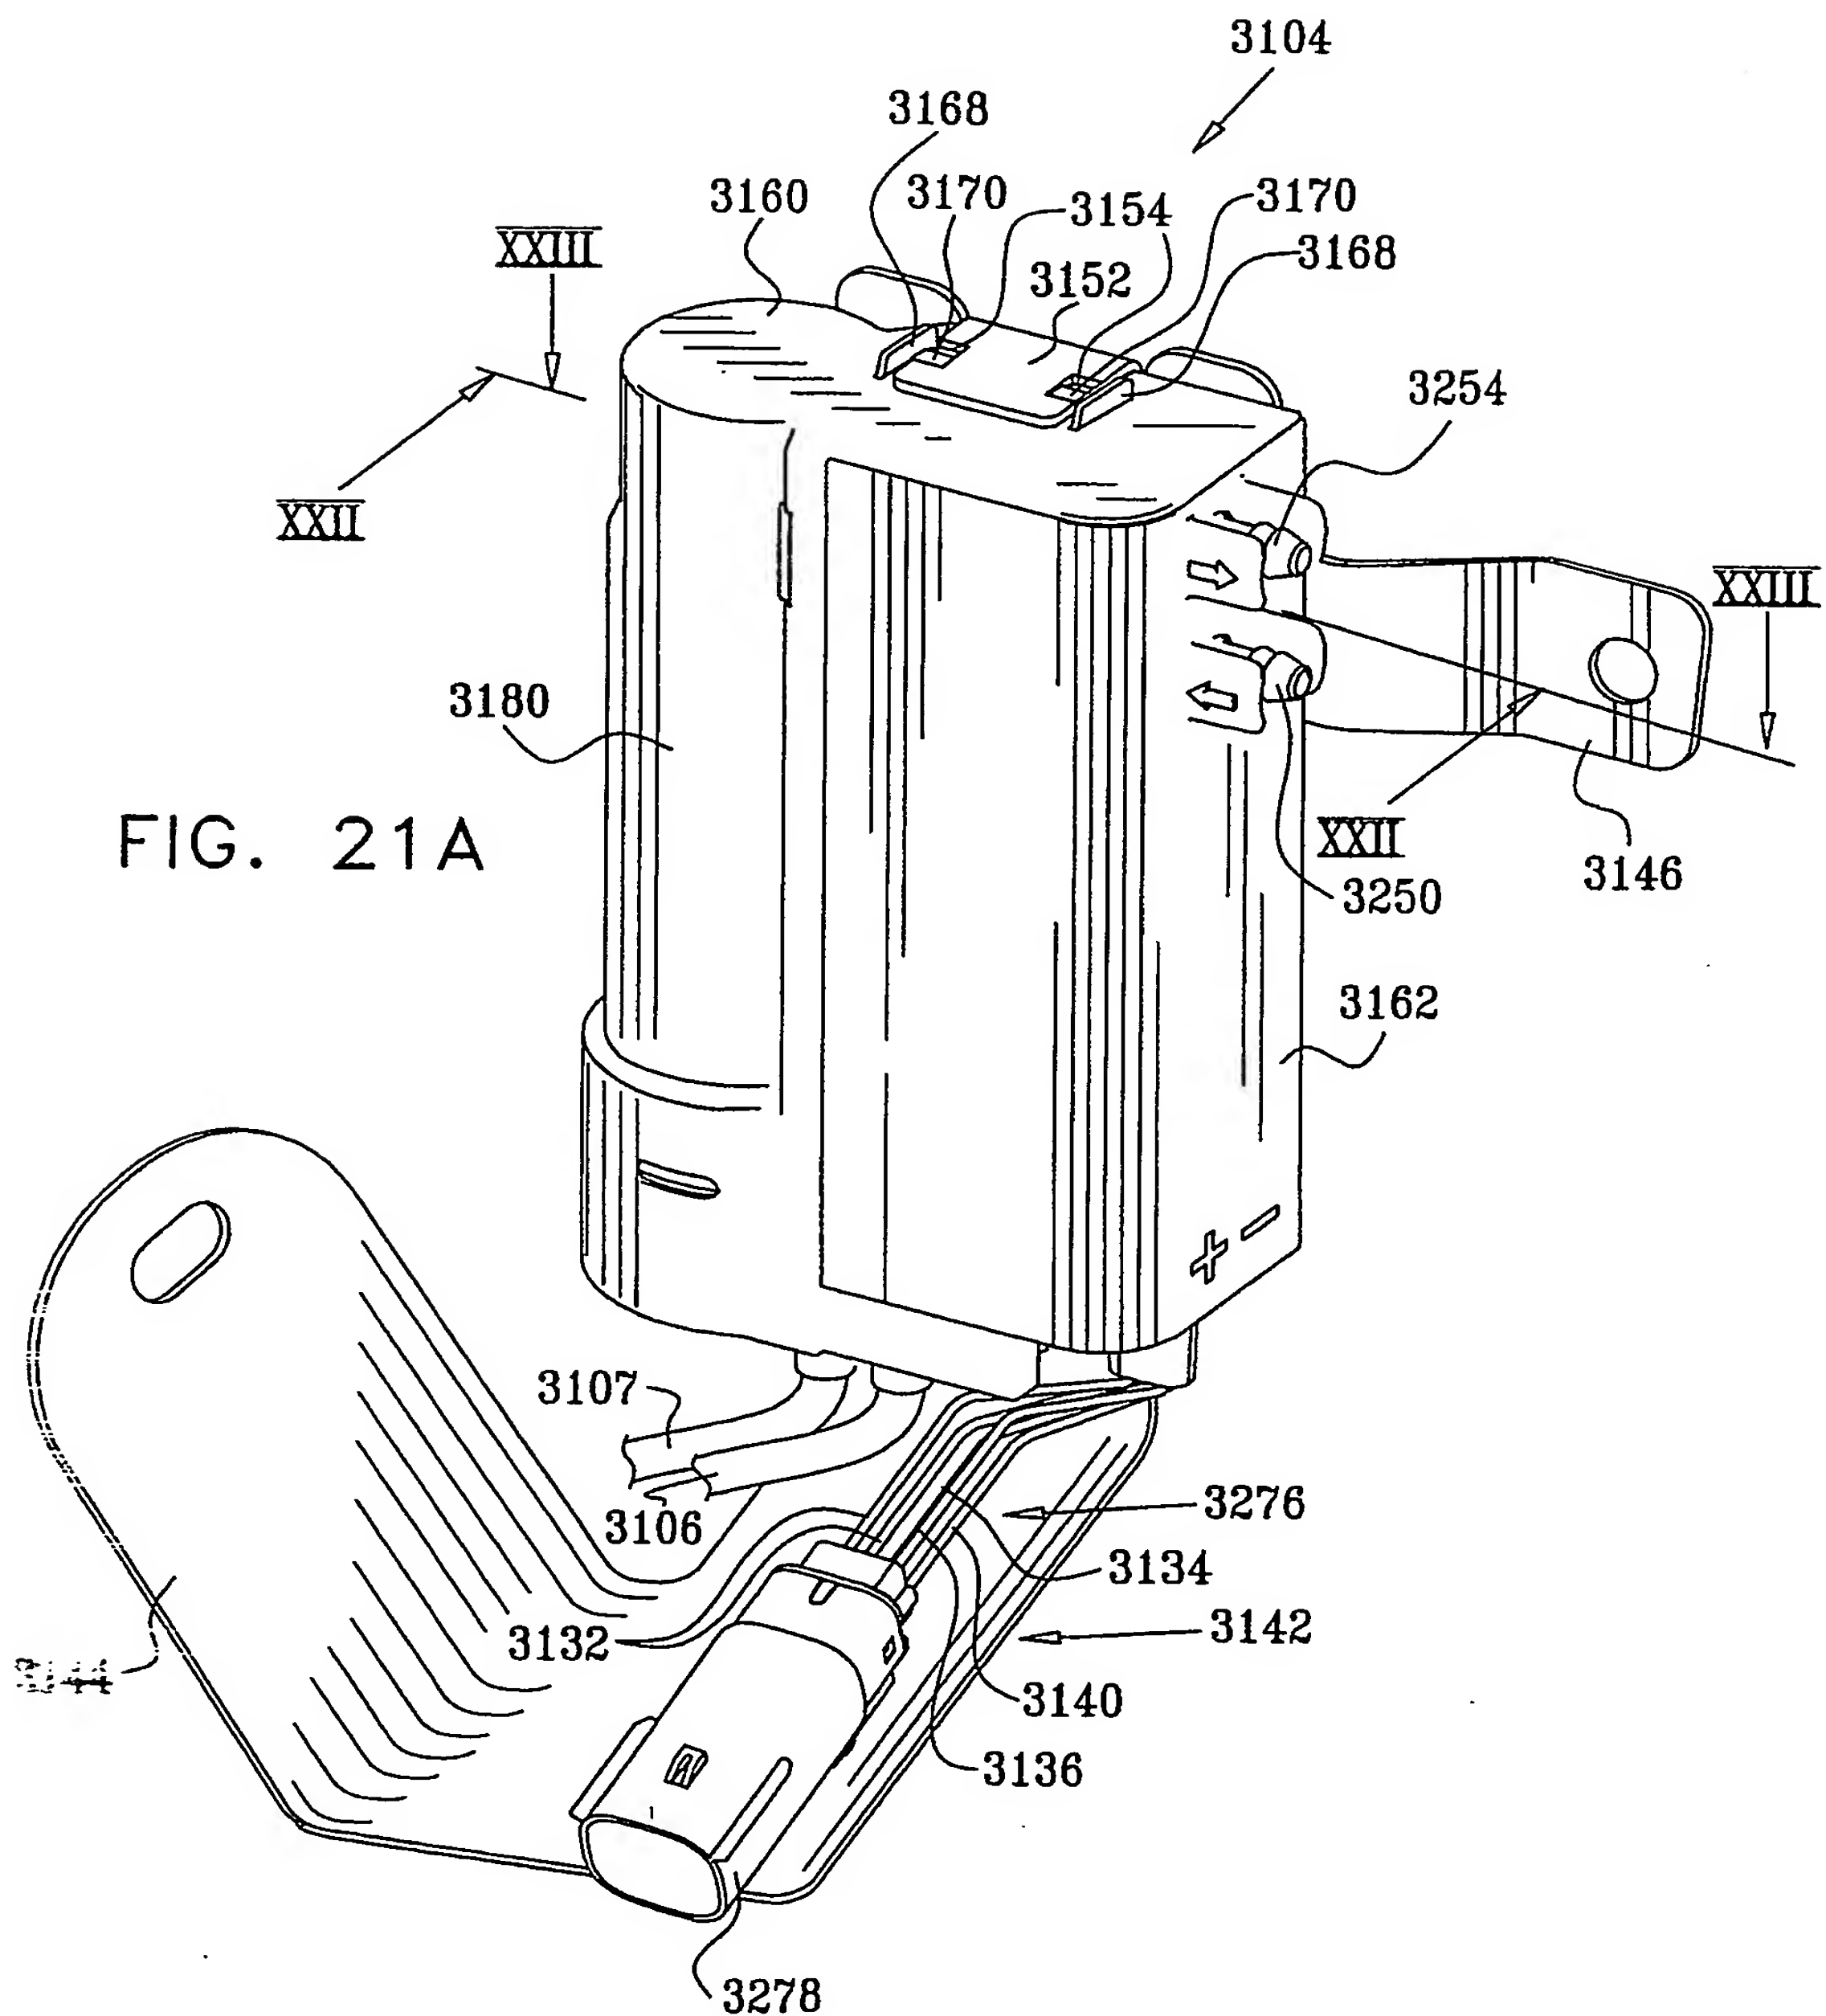


25/37

FIG. 21 B

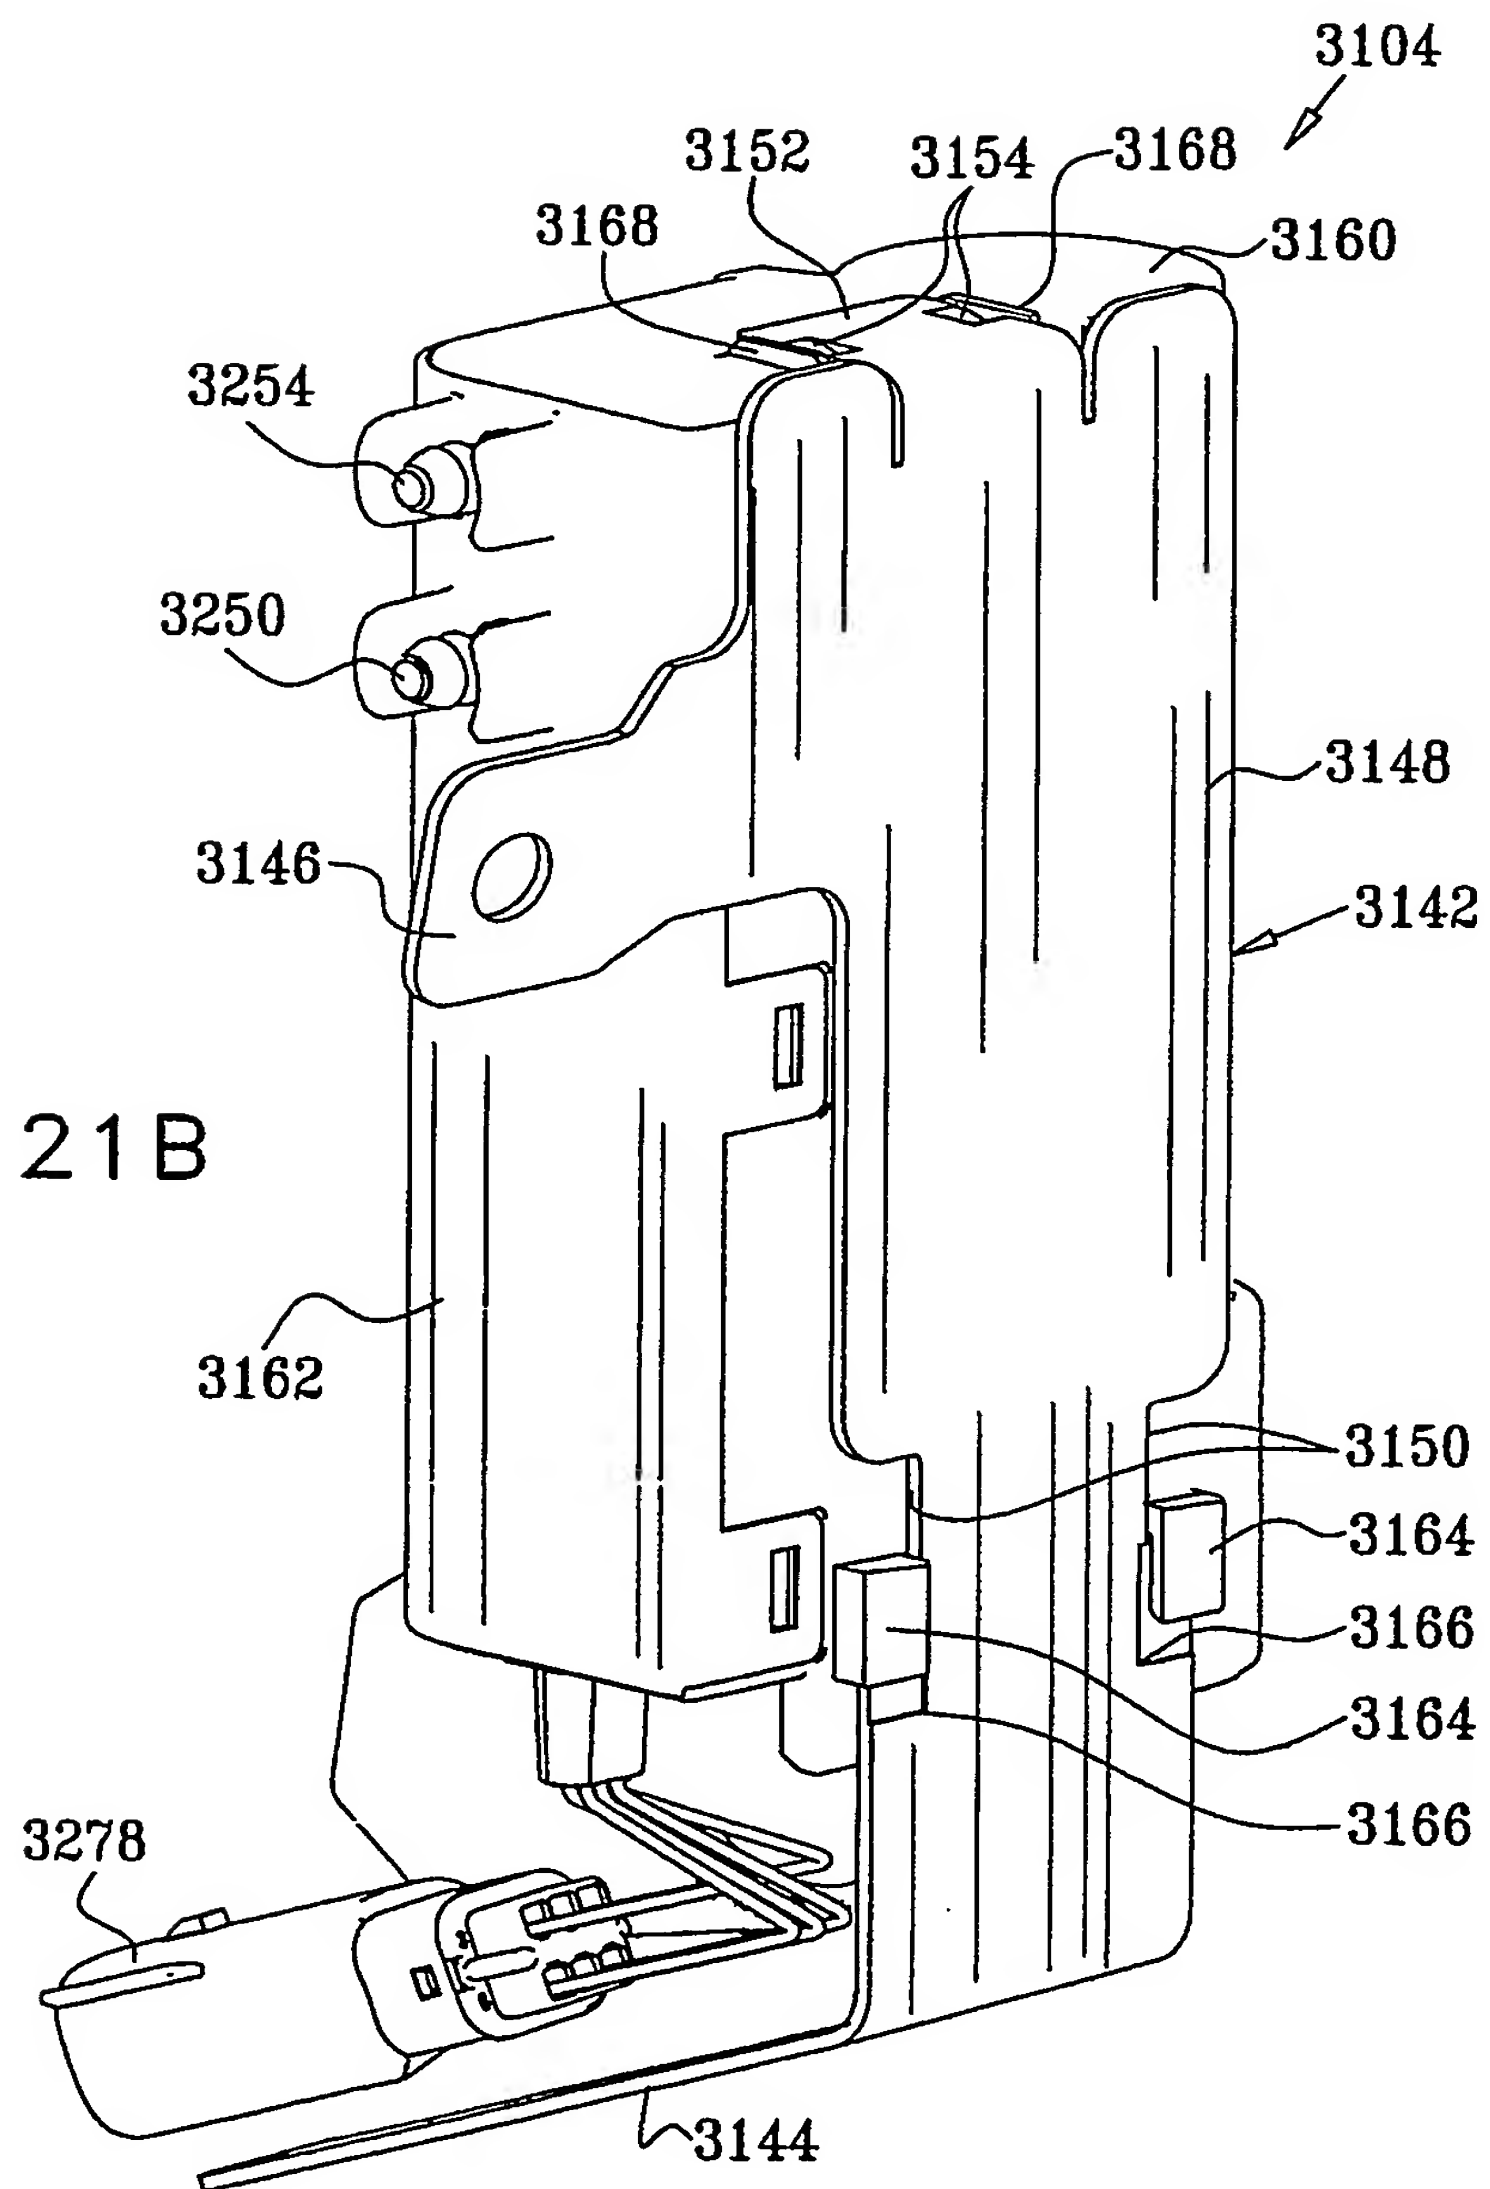

26/37

FIG. 22

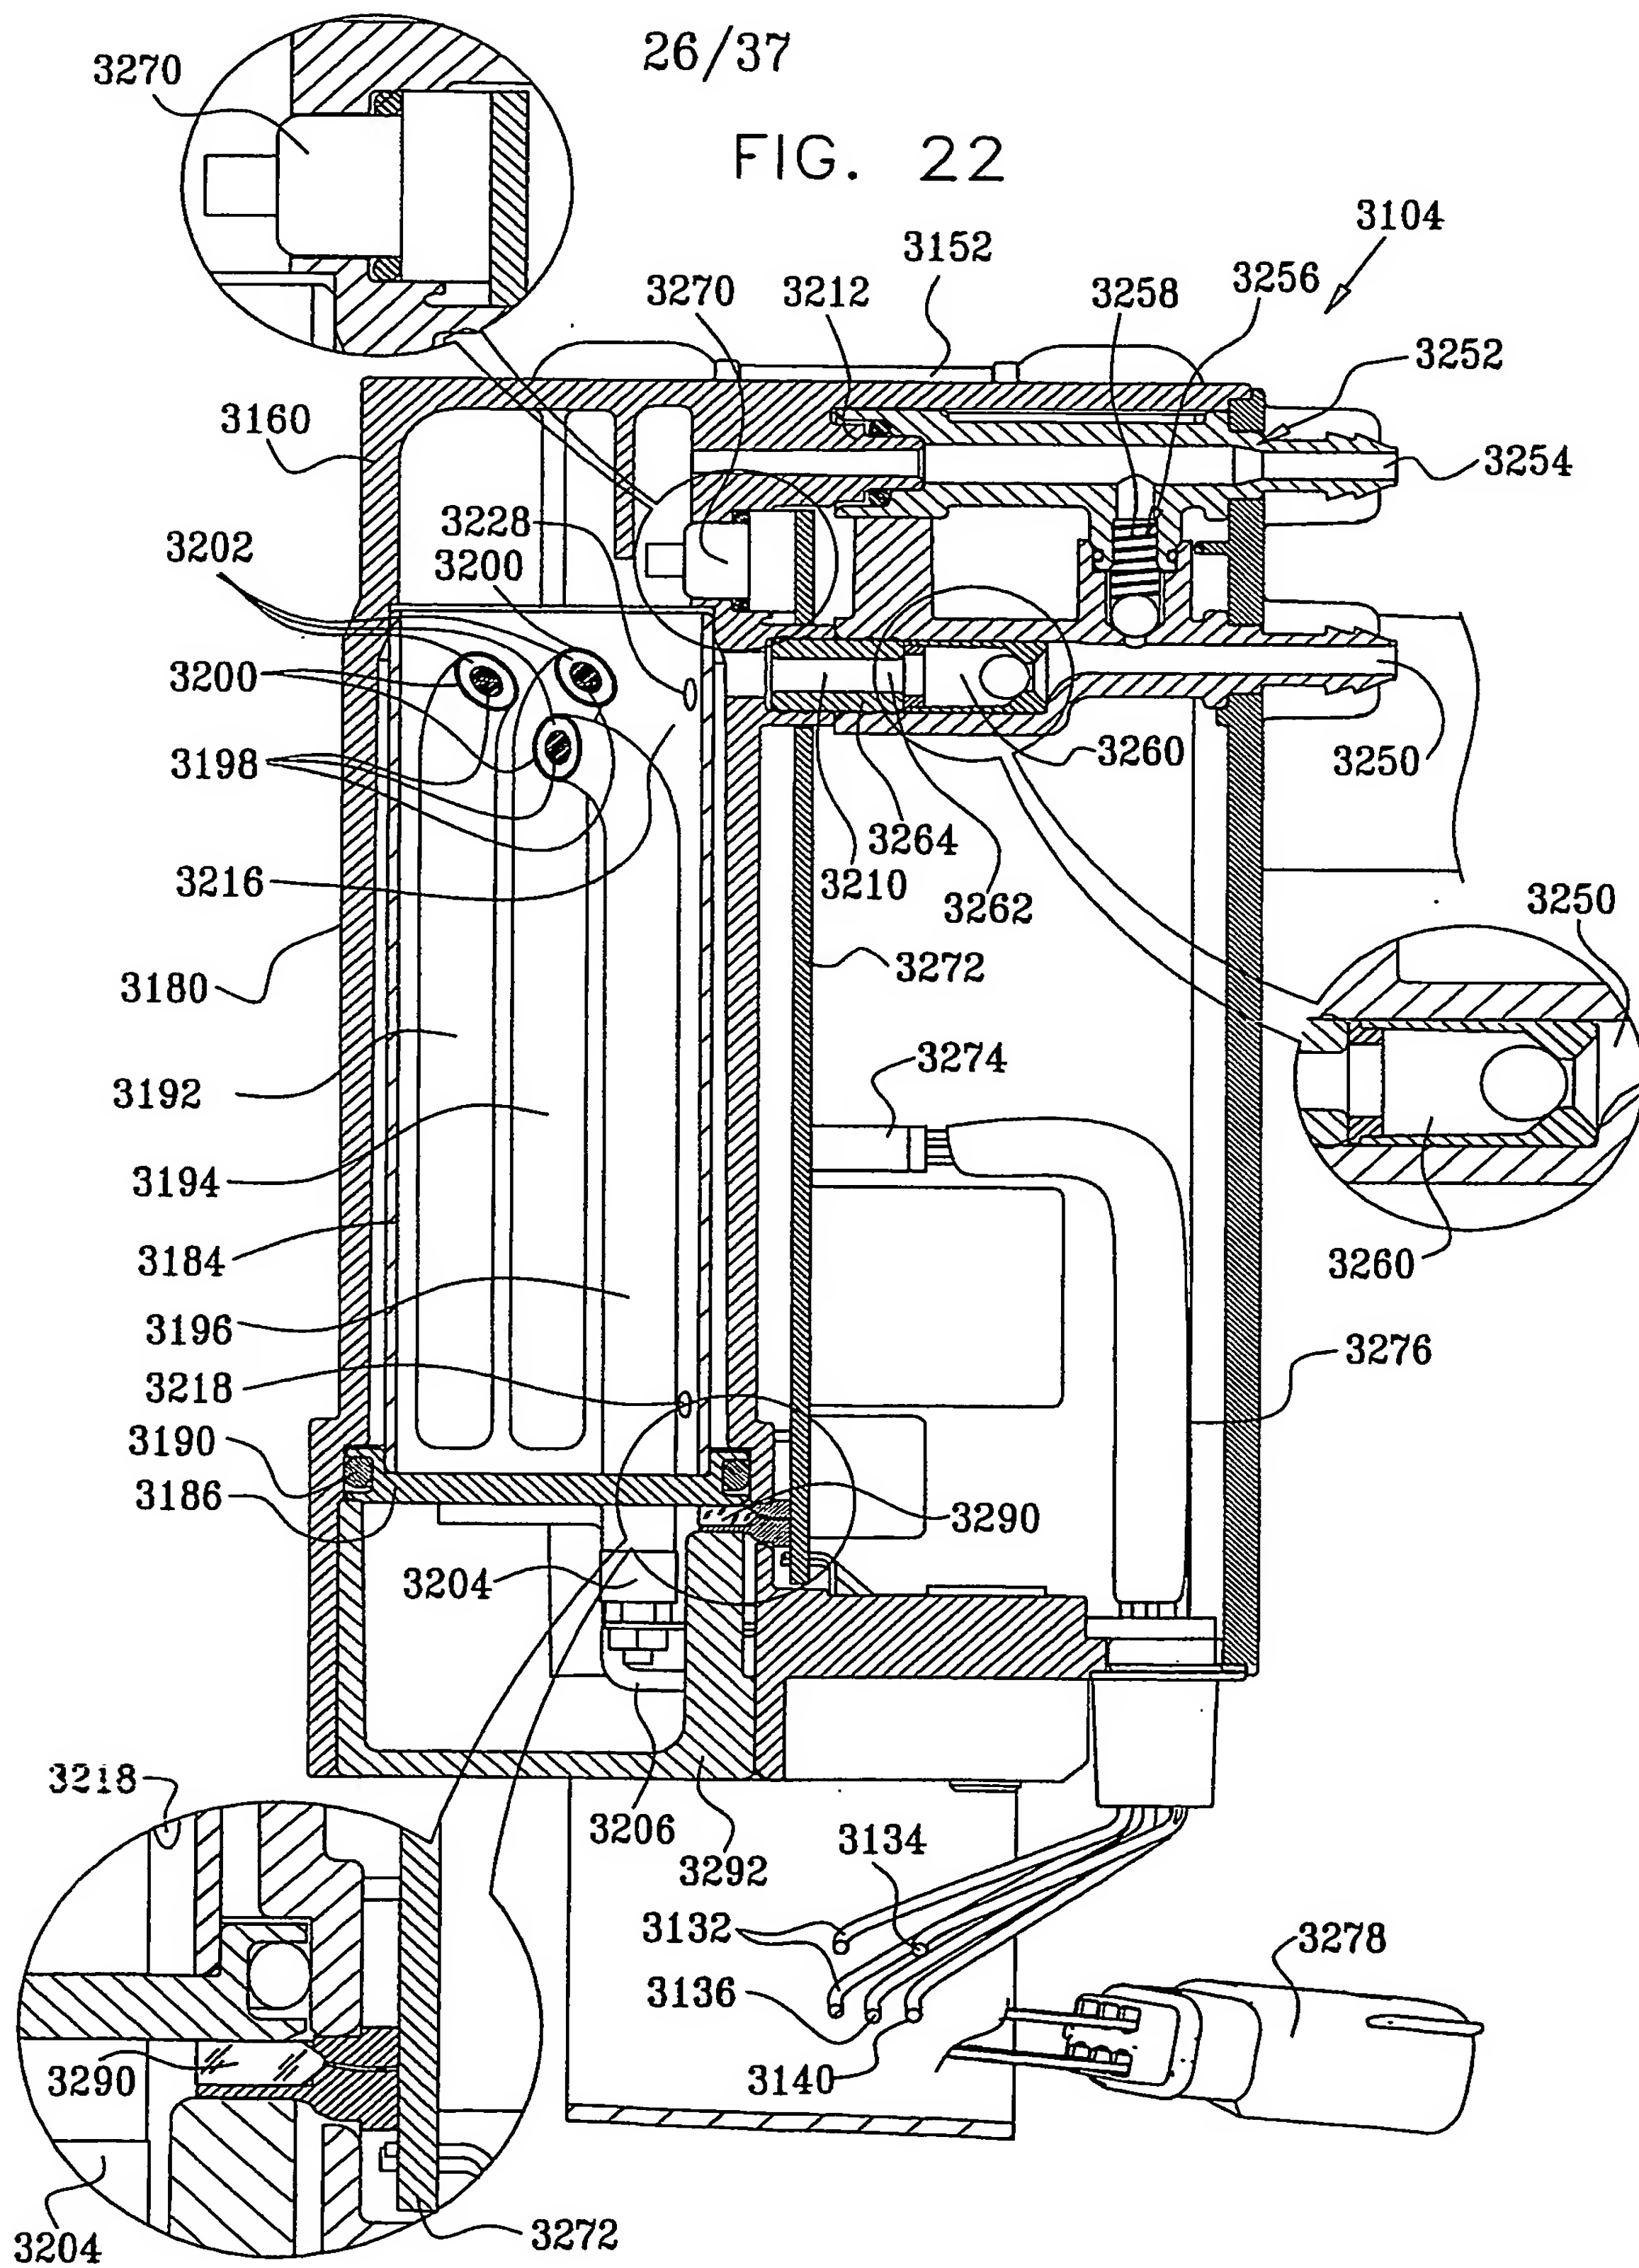

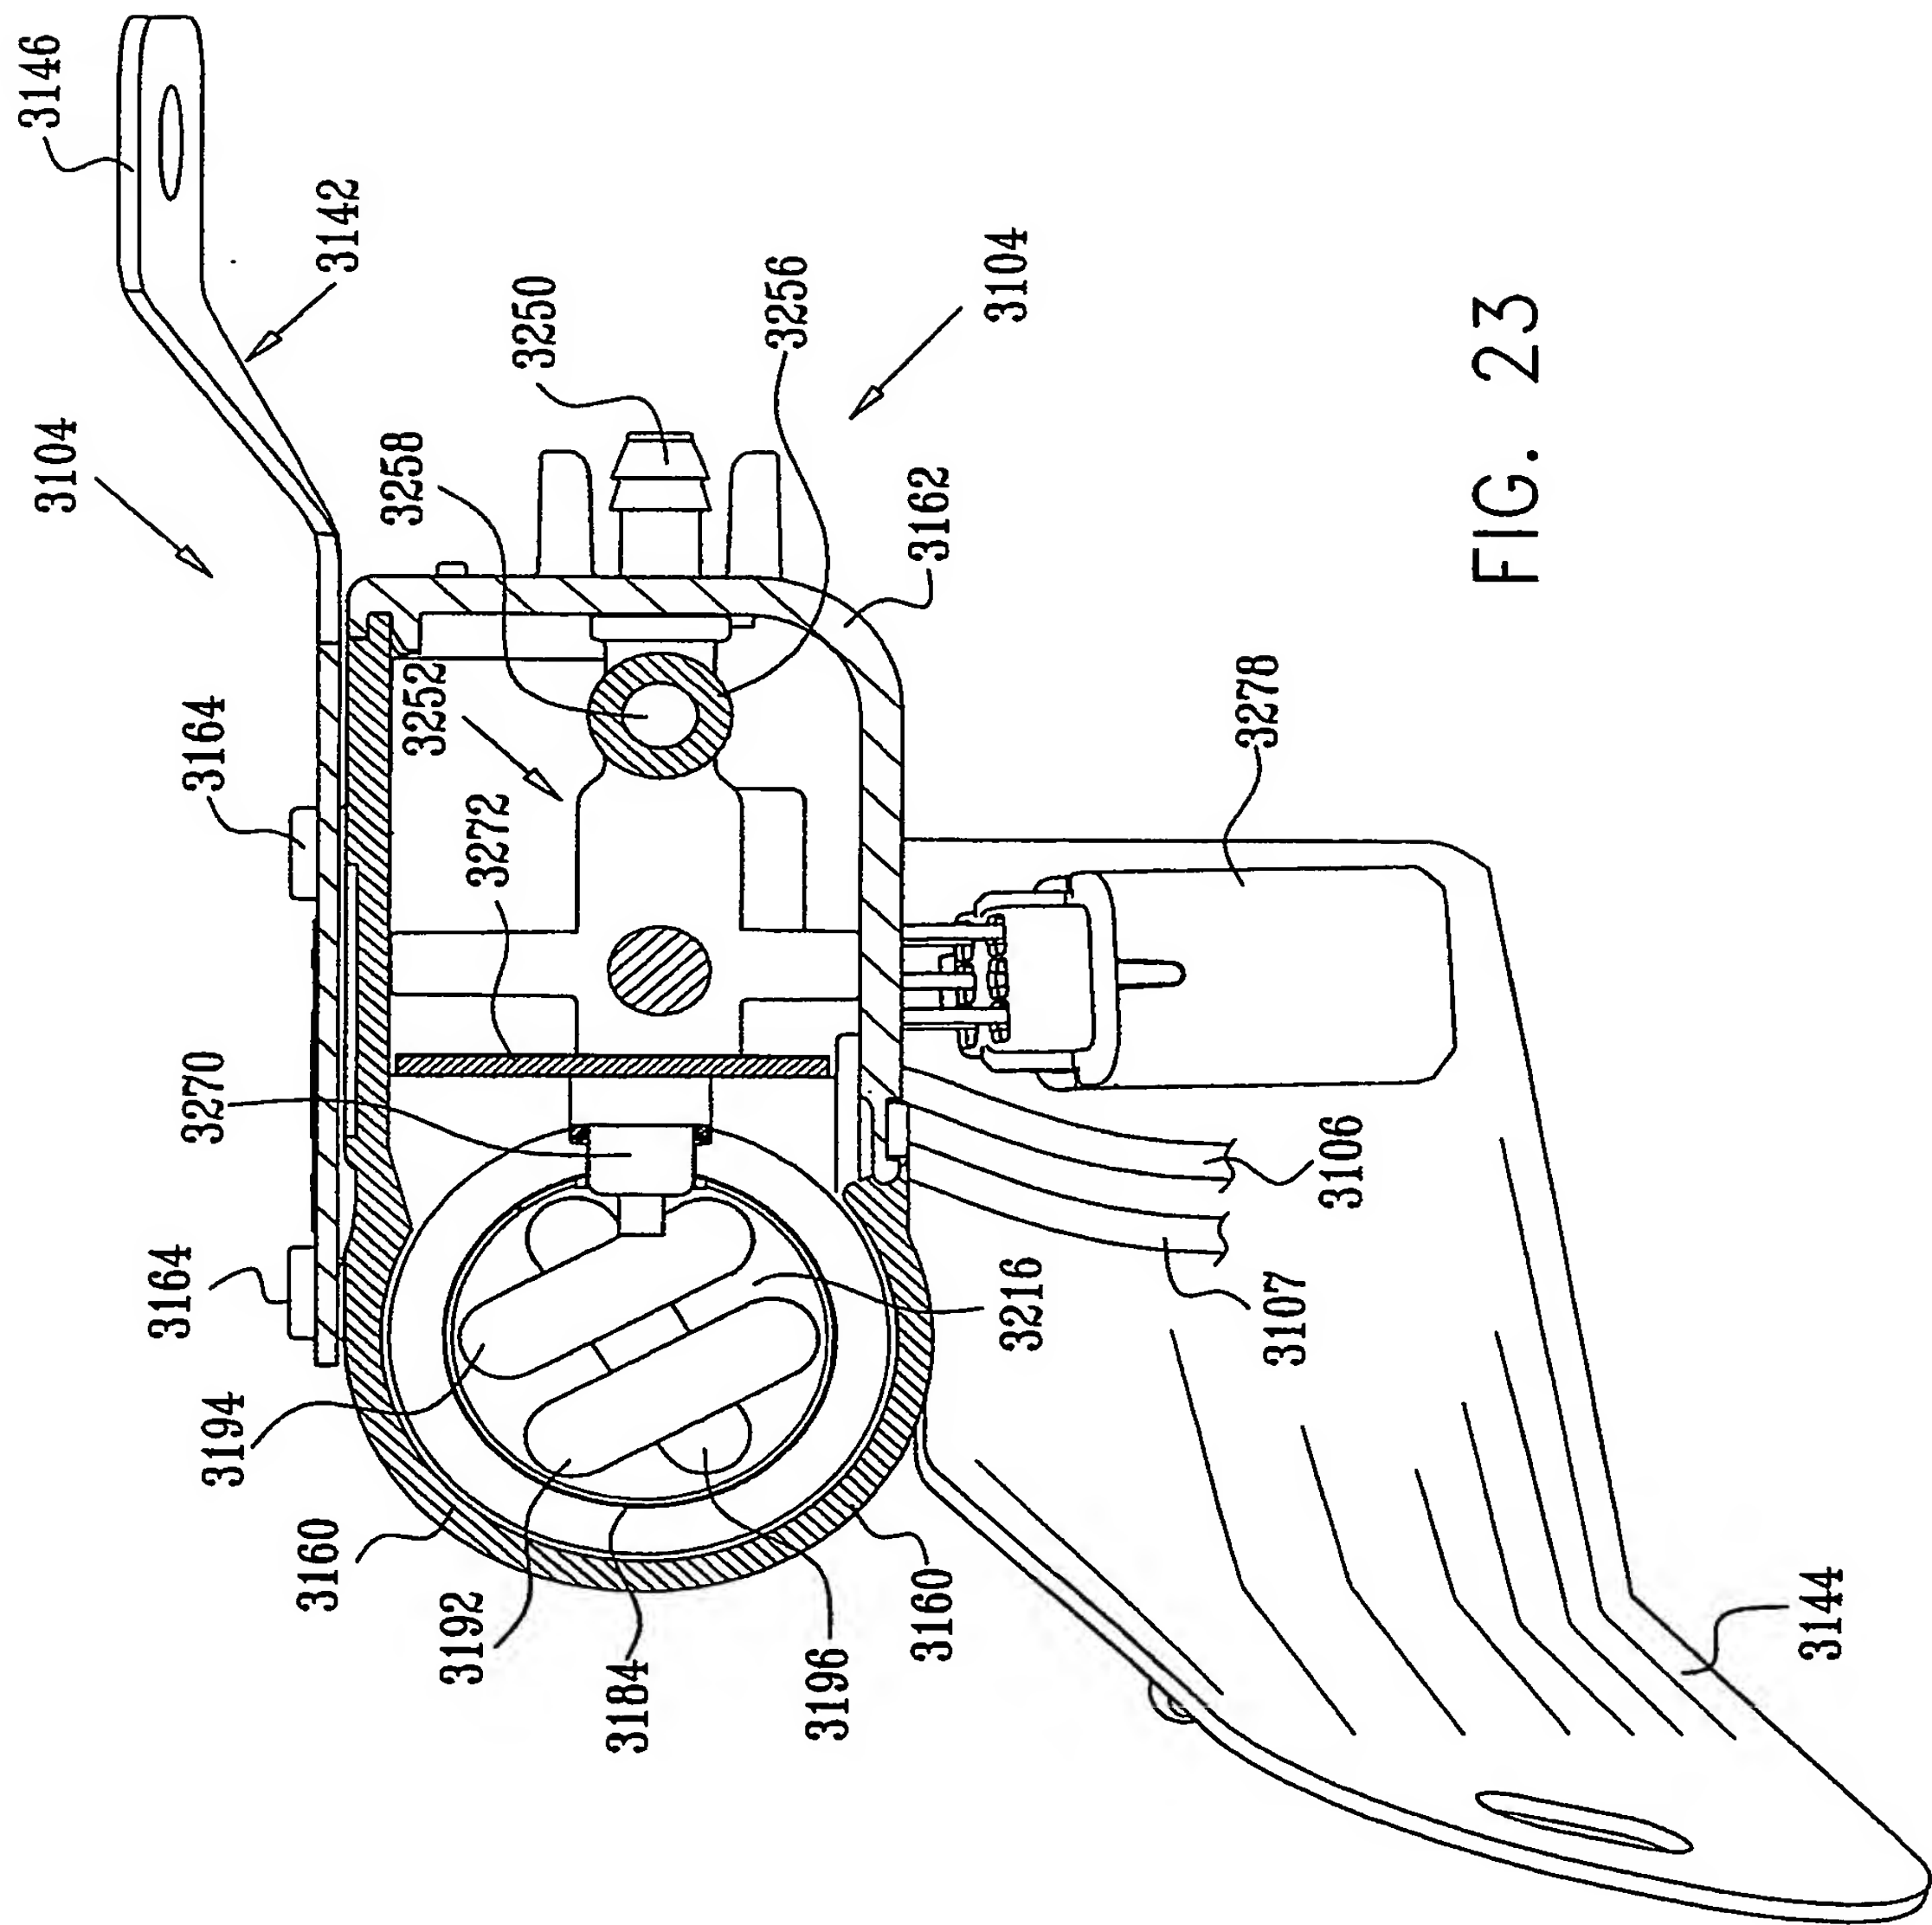
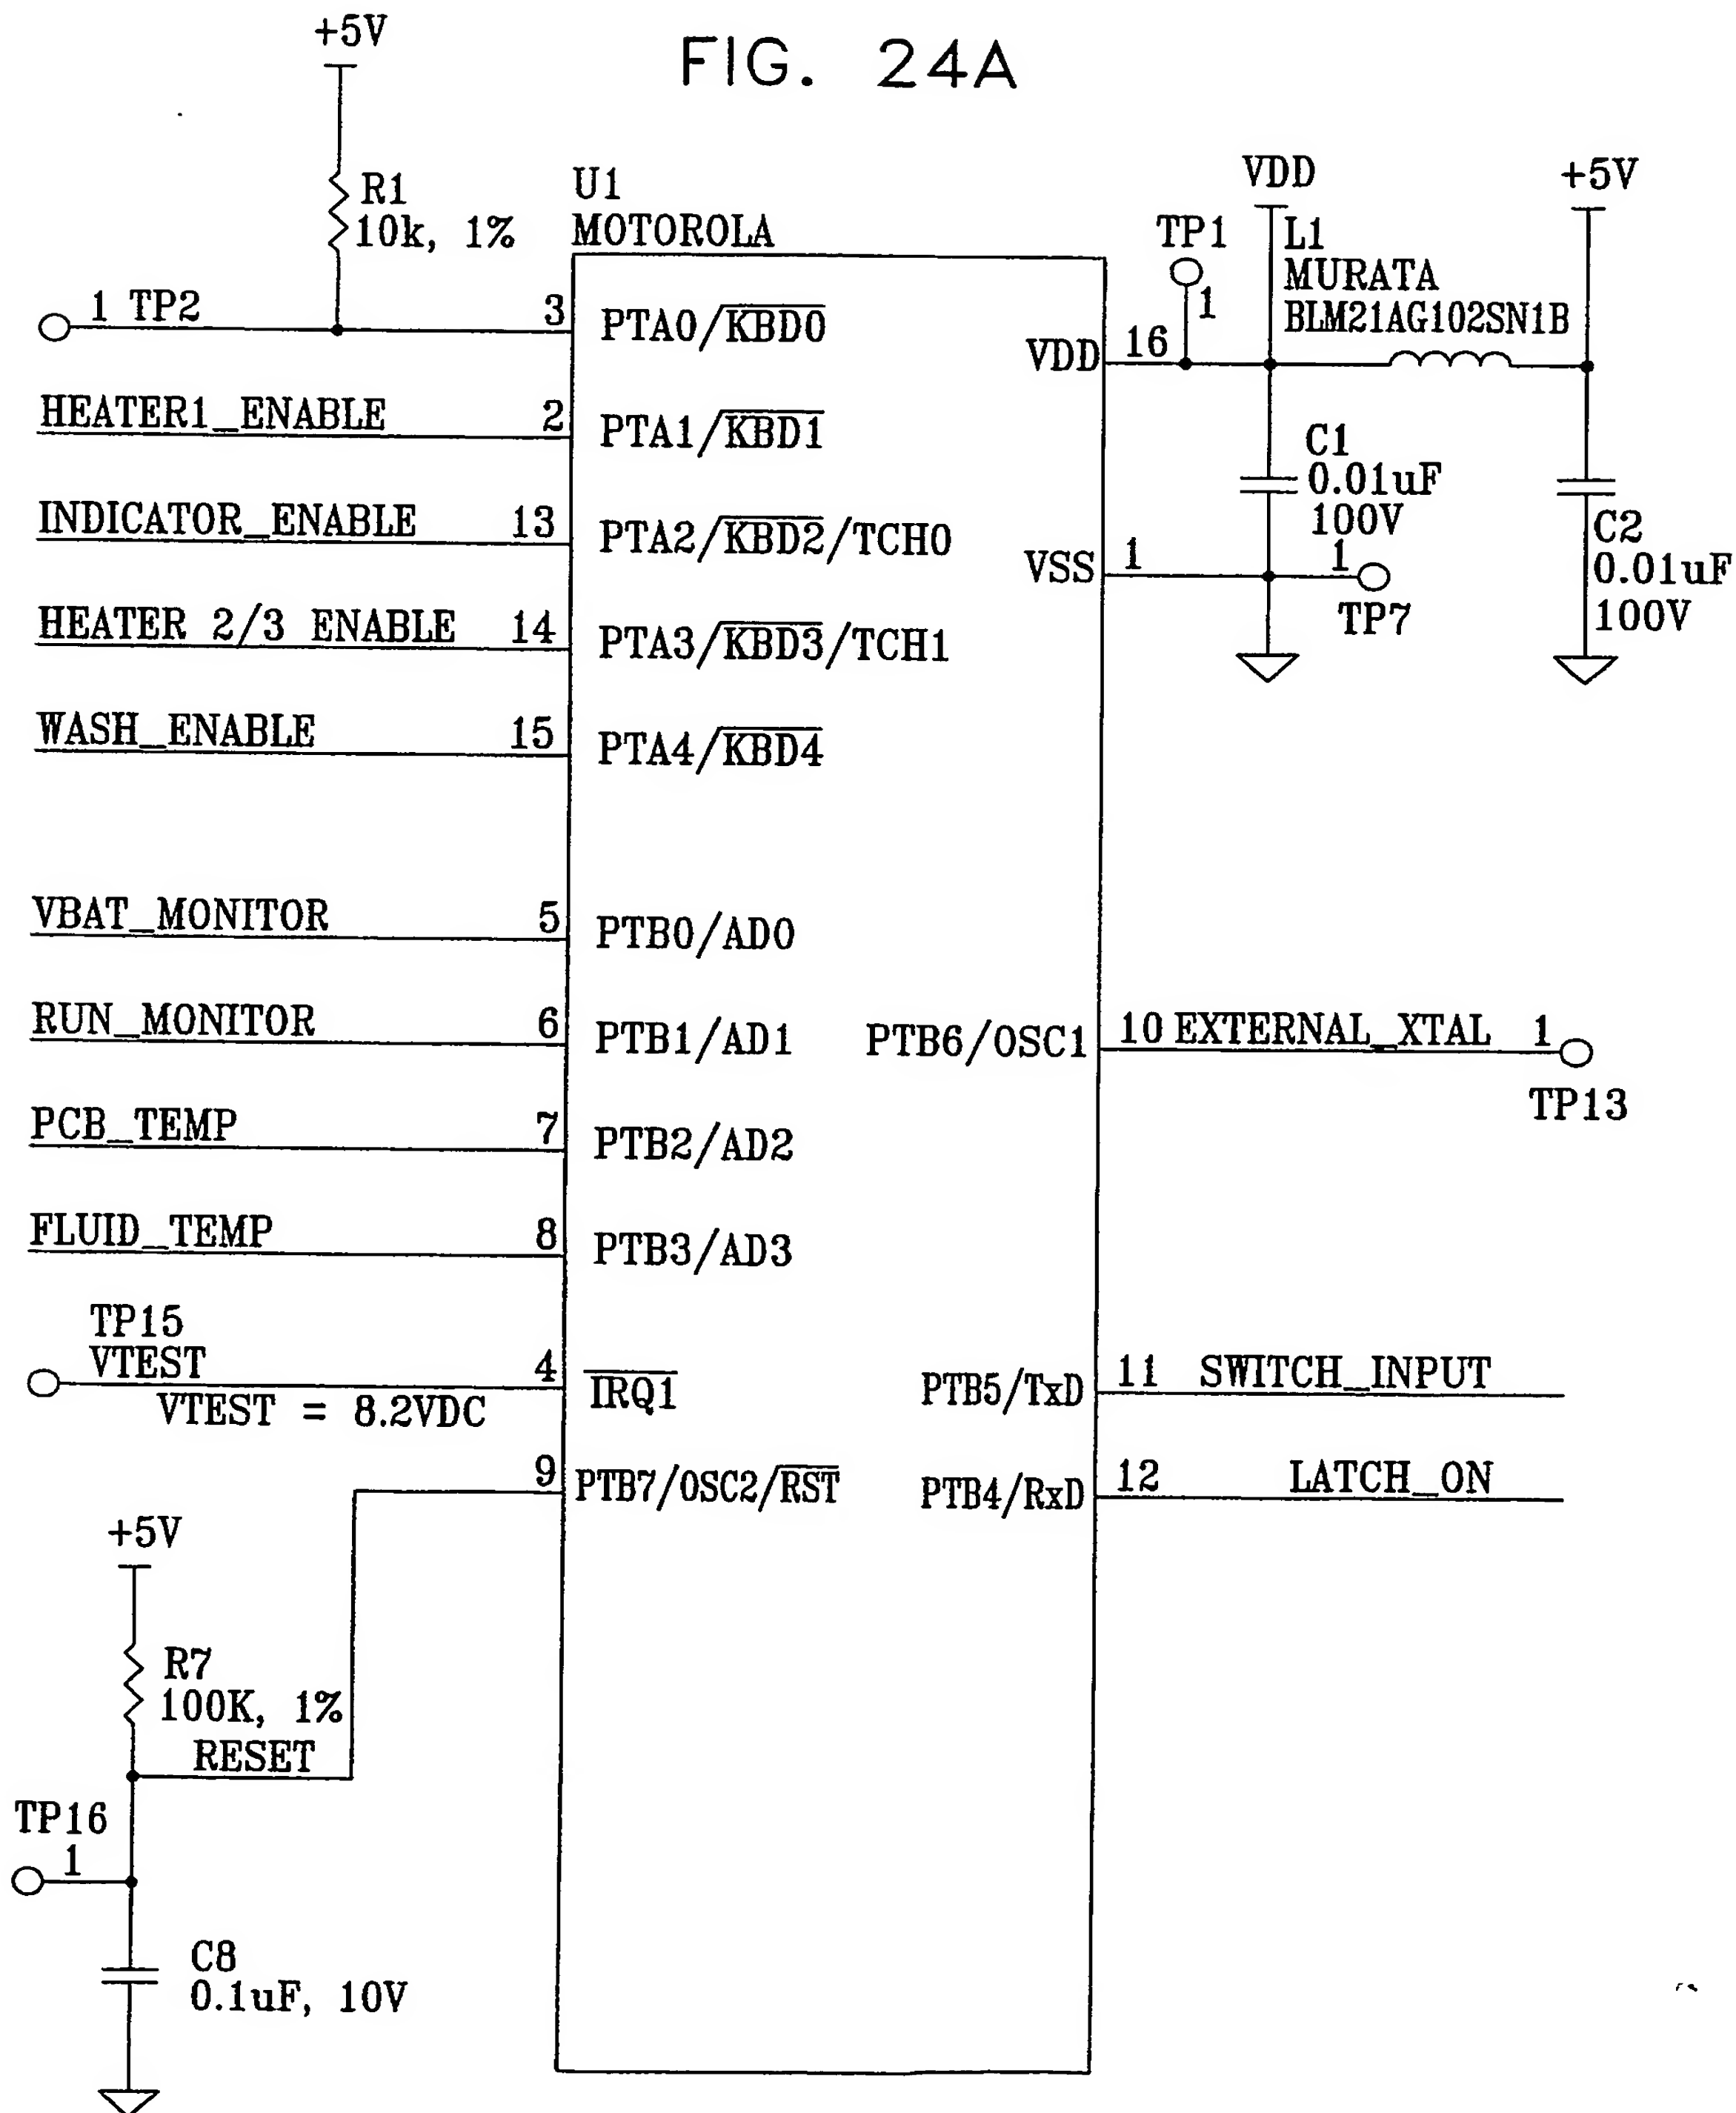


FIG. 23

28/37

FIG. 24A



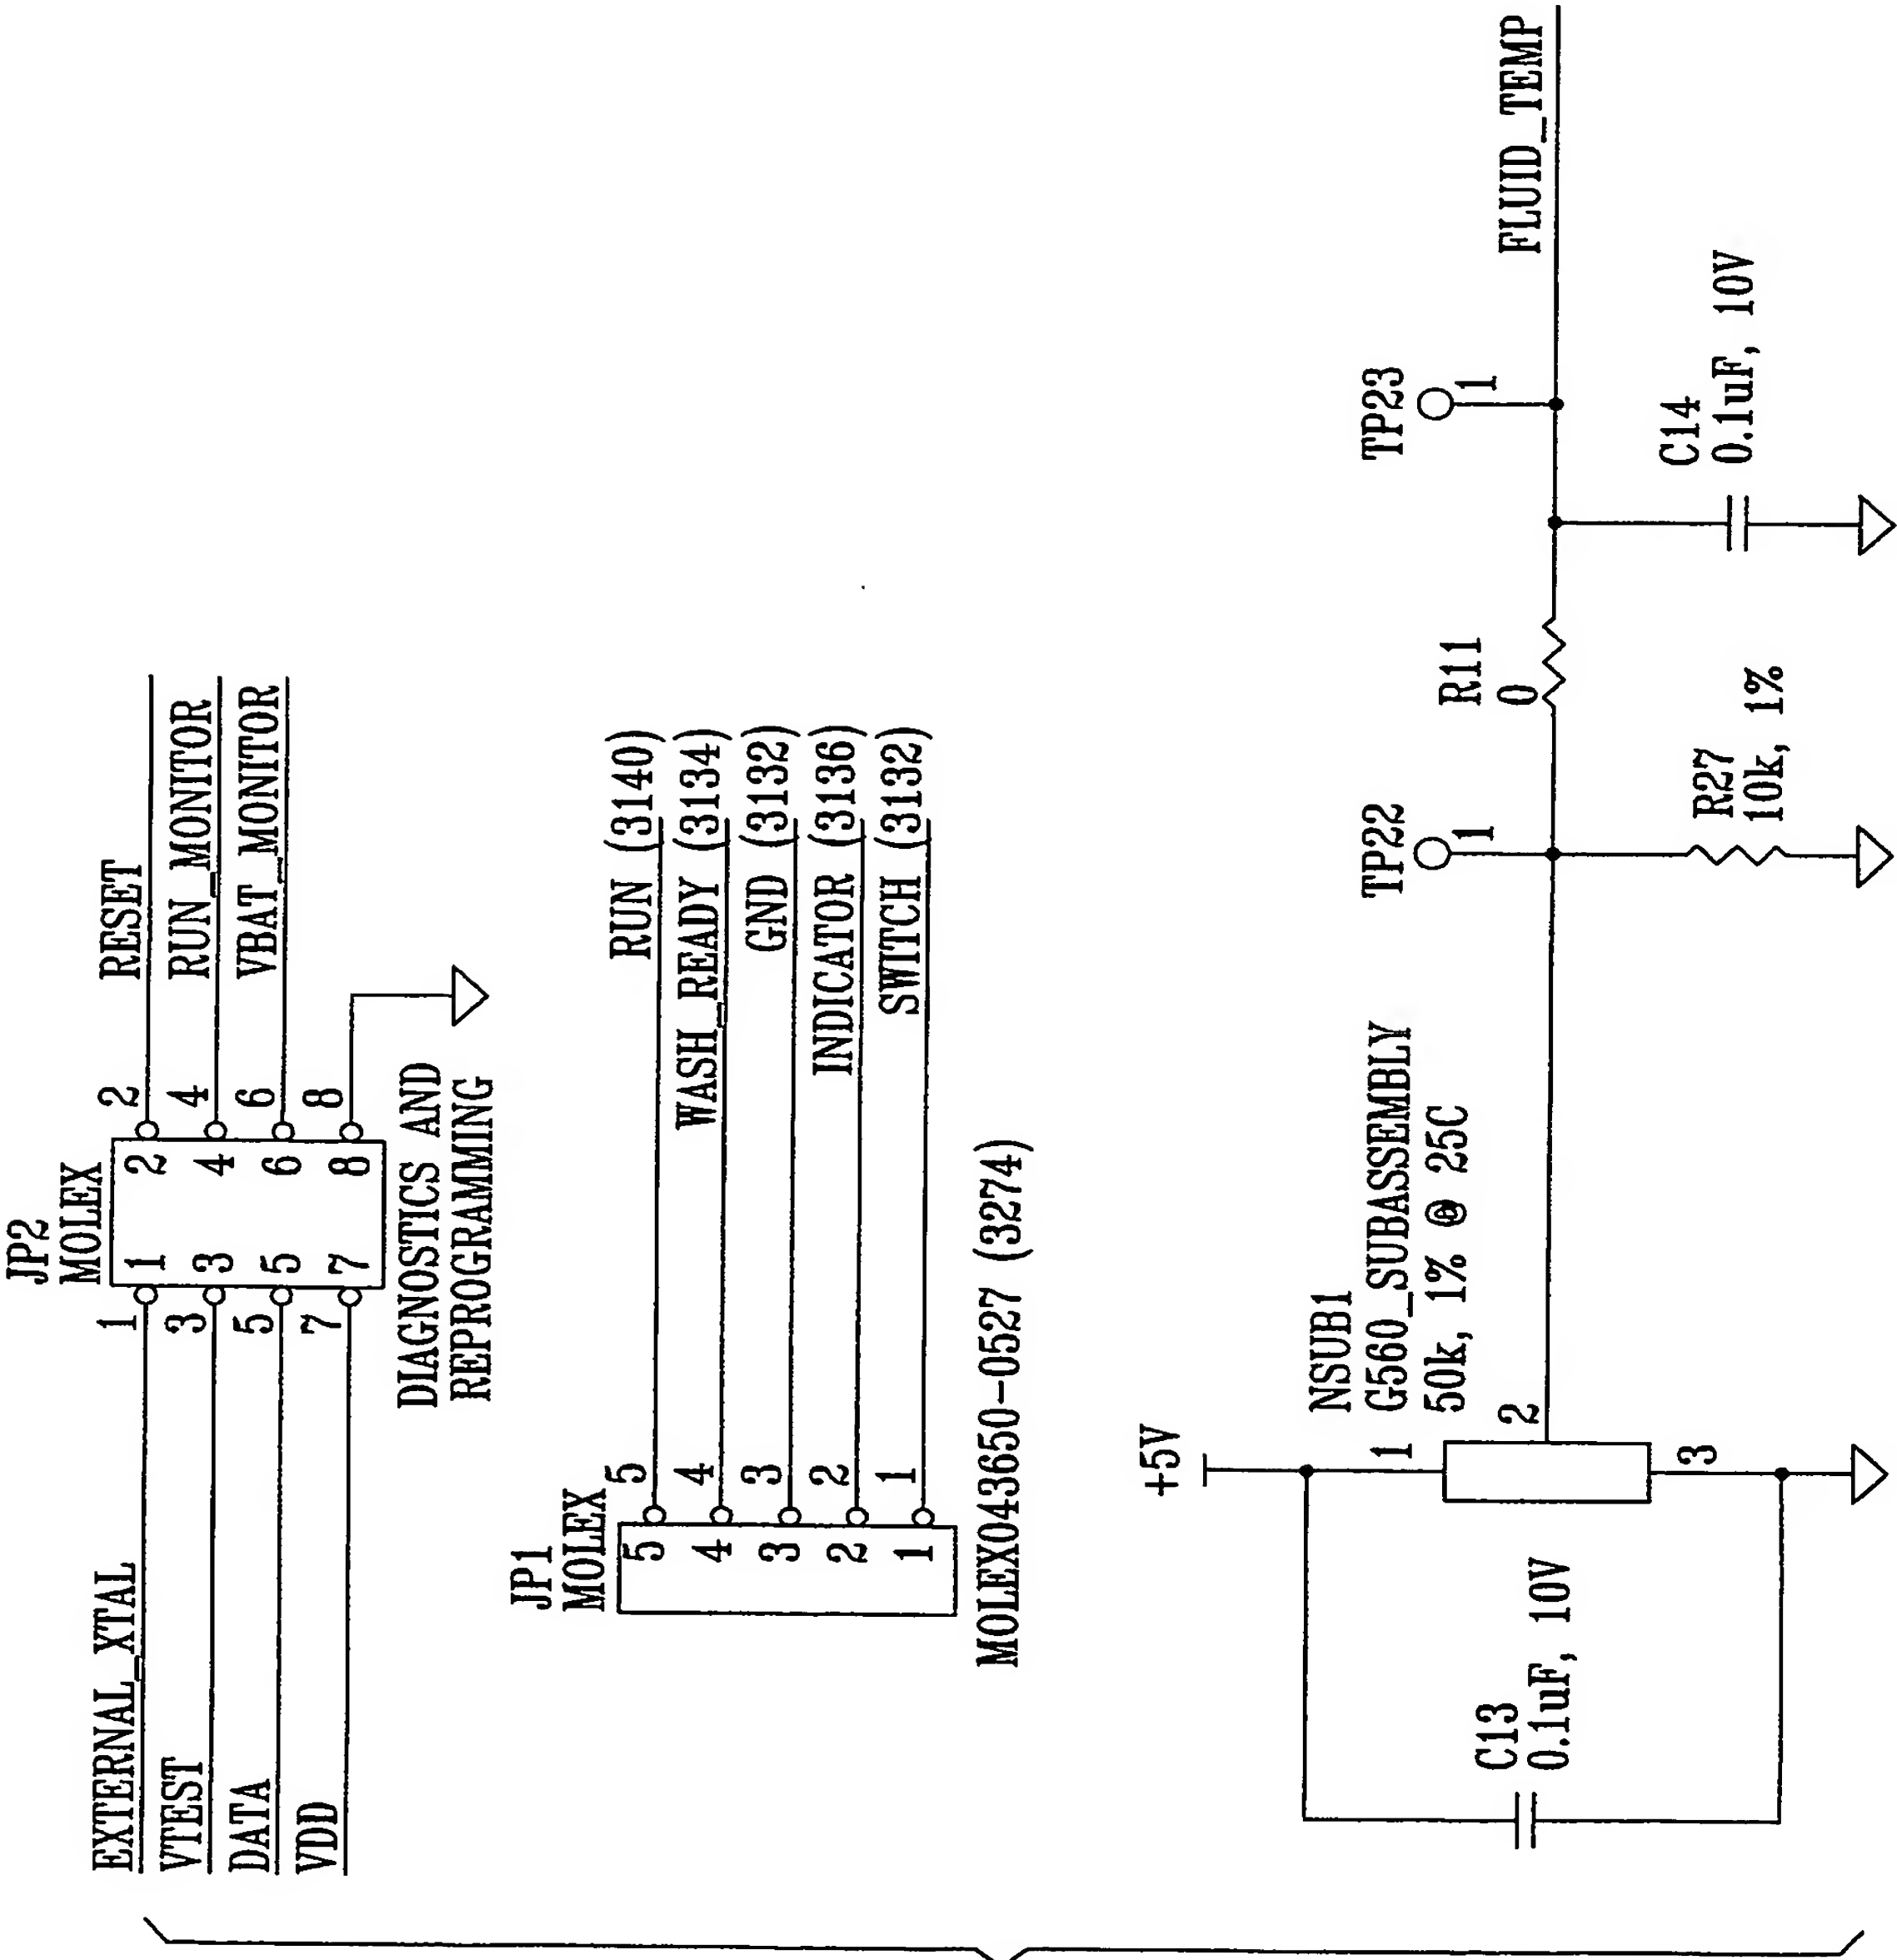


FIG. 24B

MOLEX043650-0527 (3274)

30/37

FIG. 24C/1

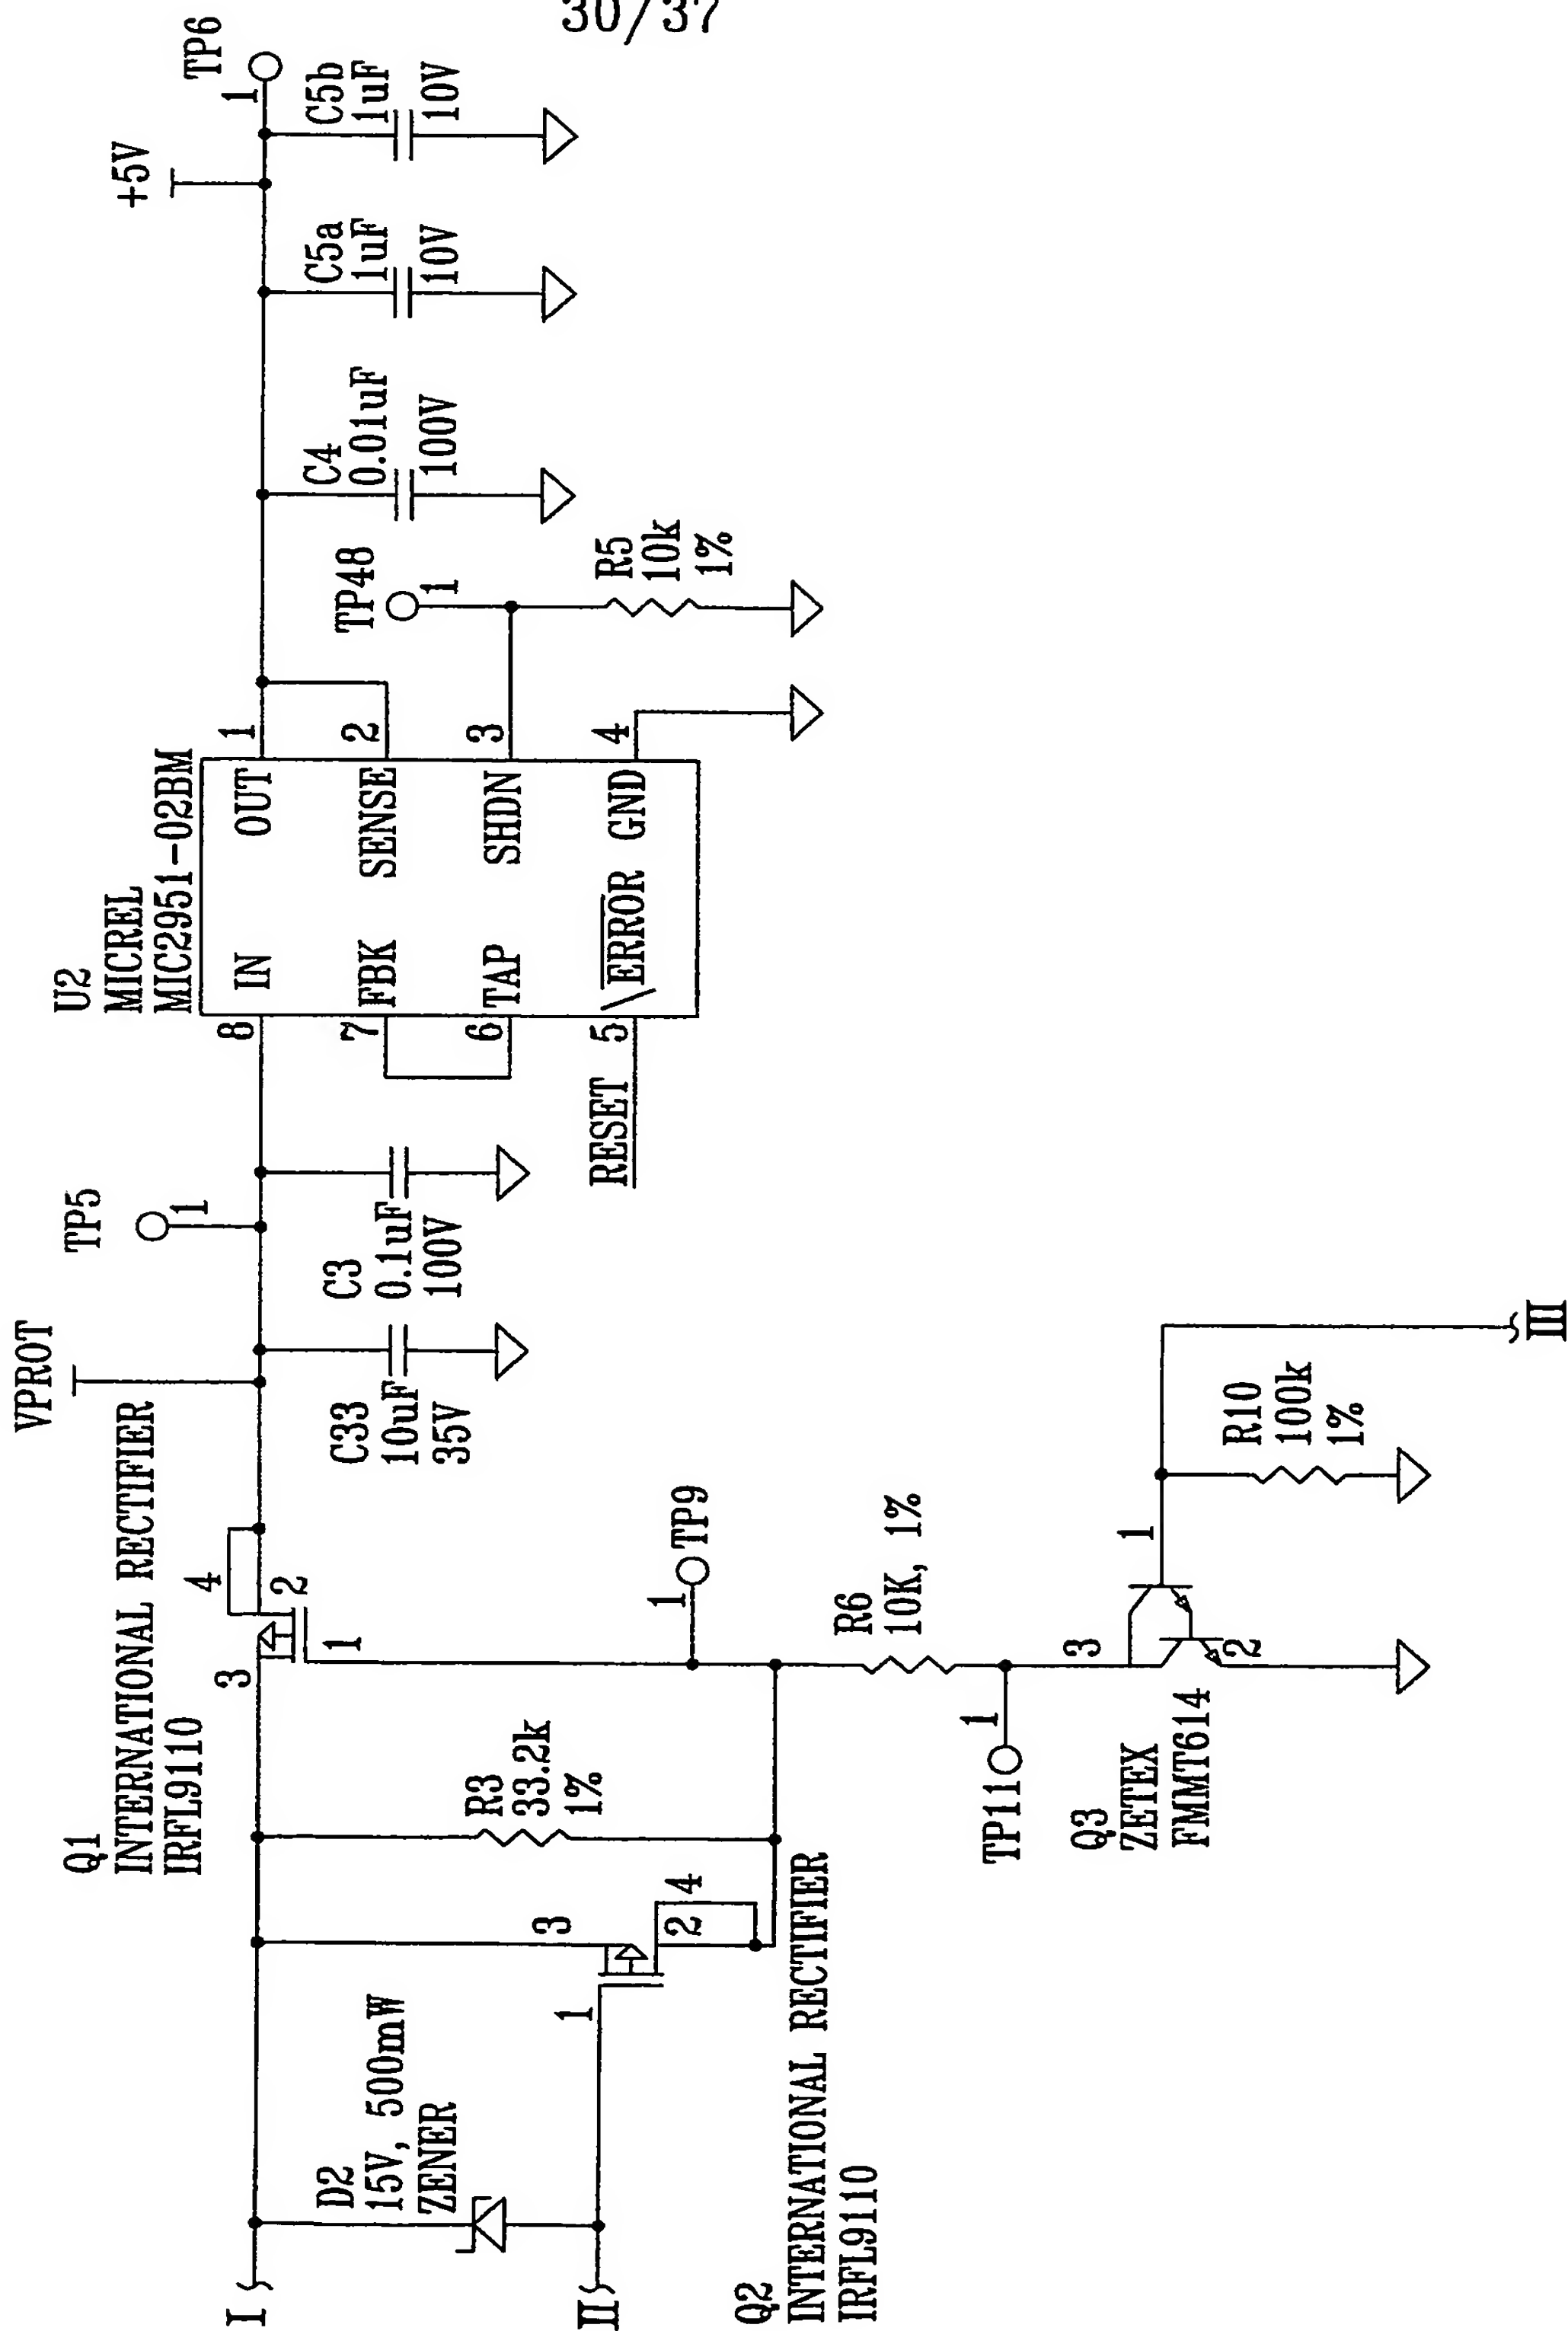


FIG. 24C/2

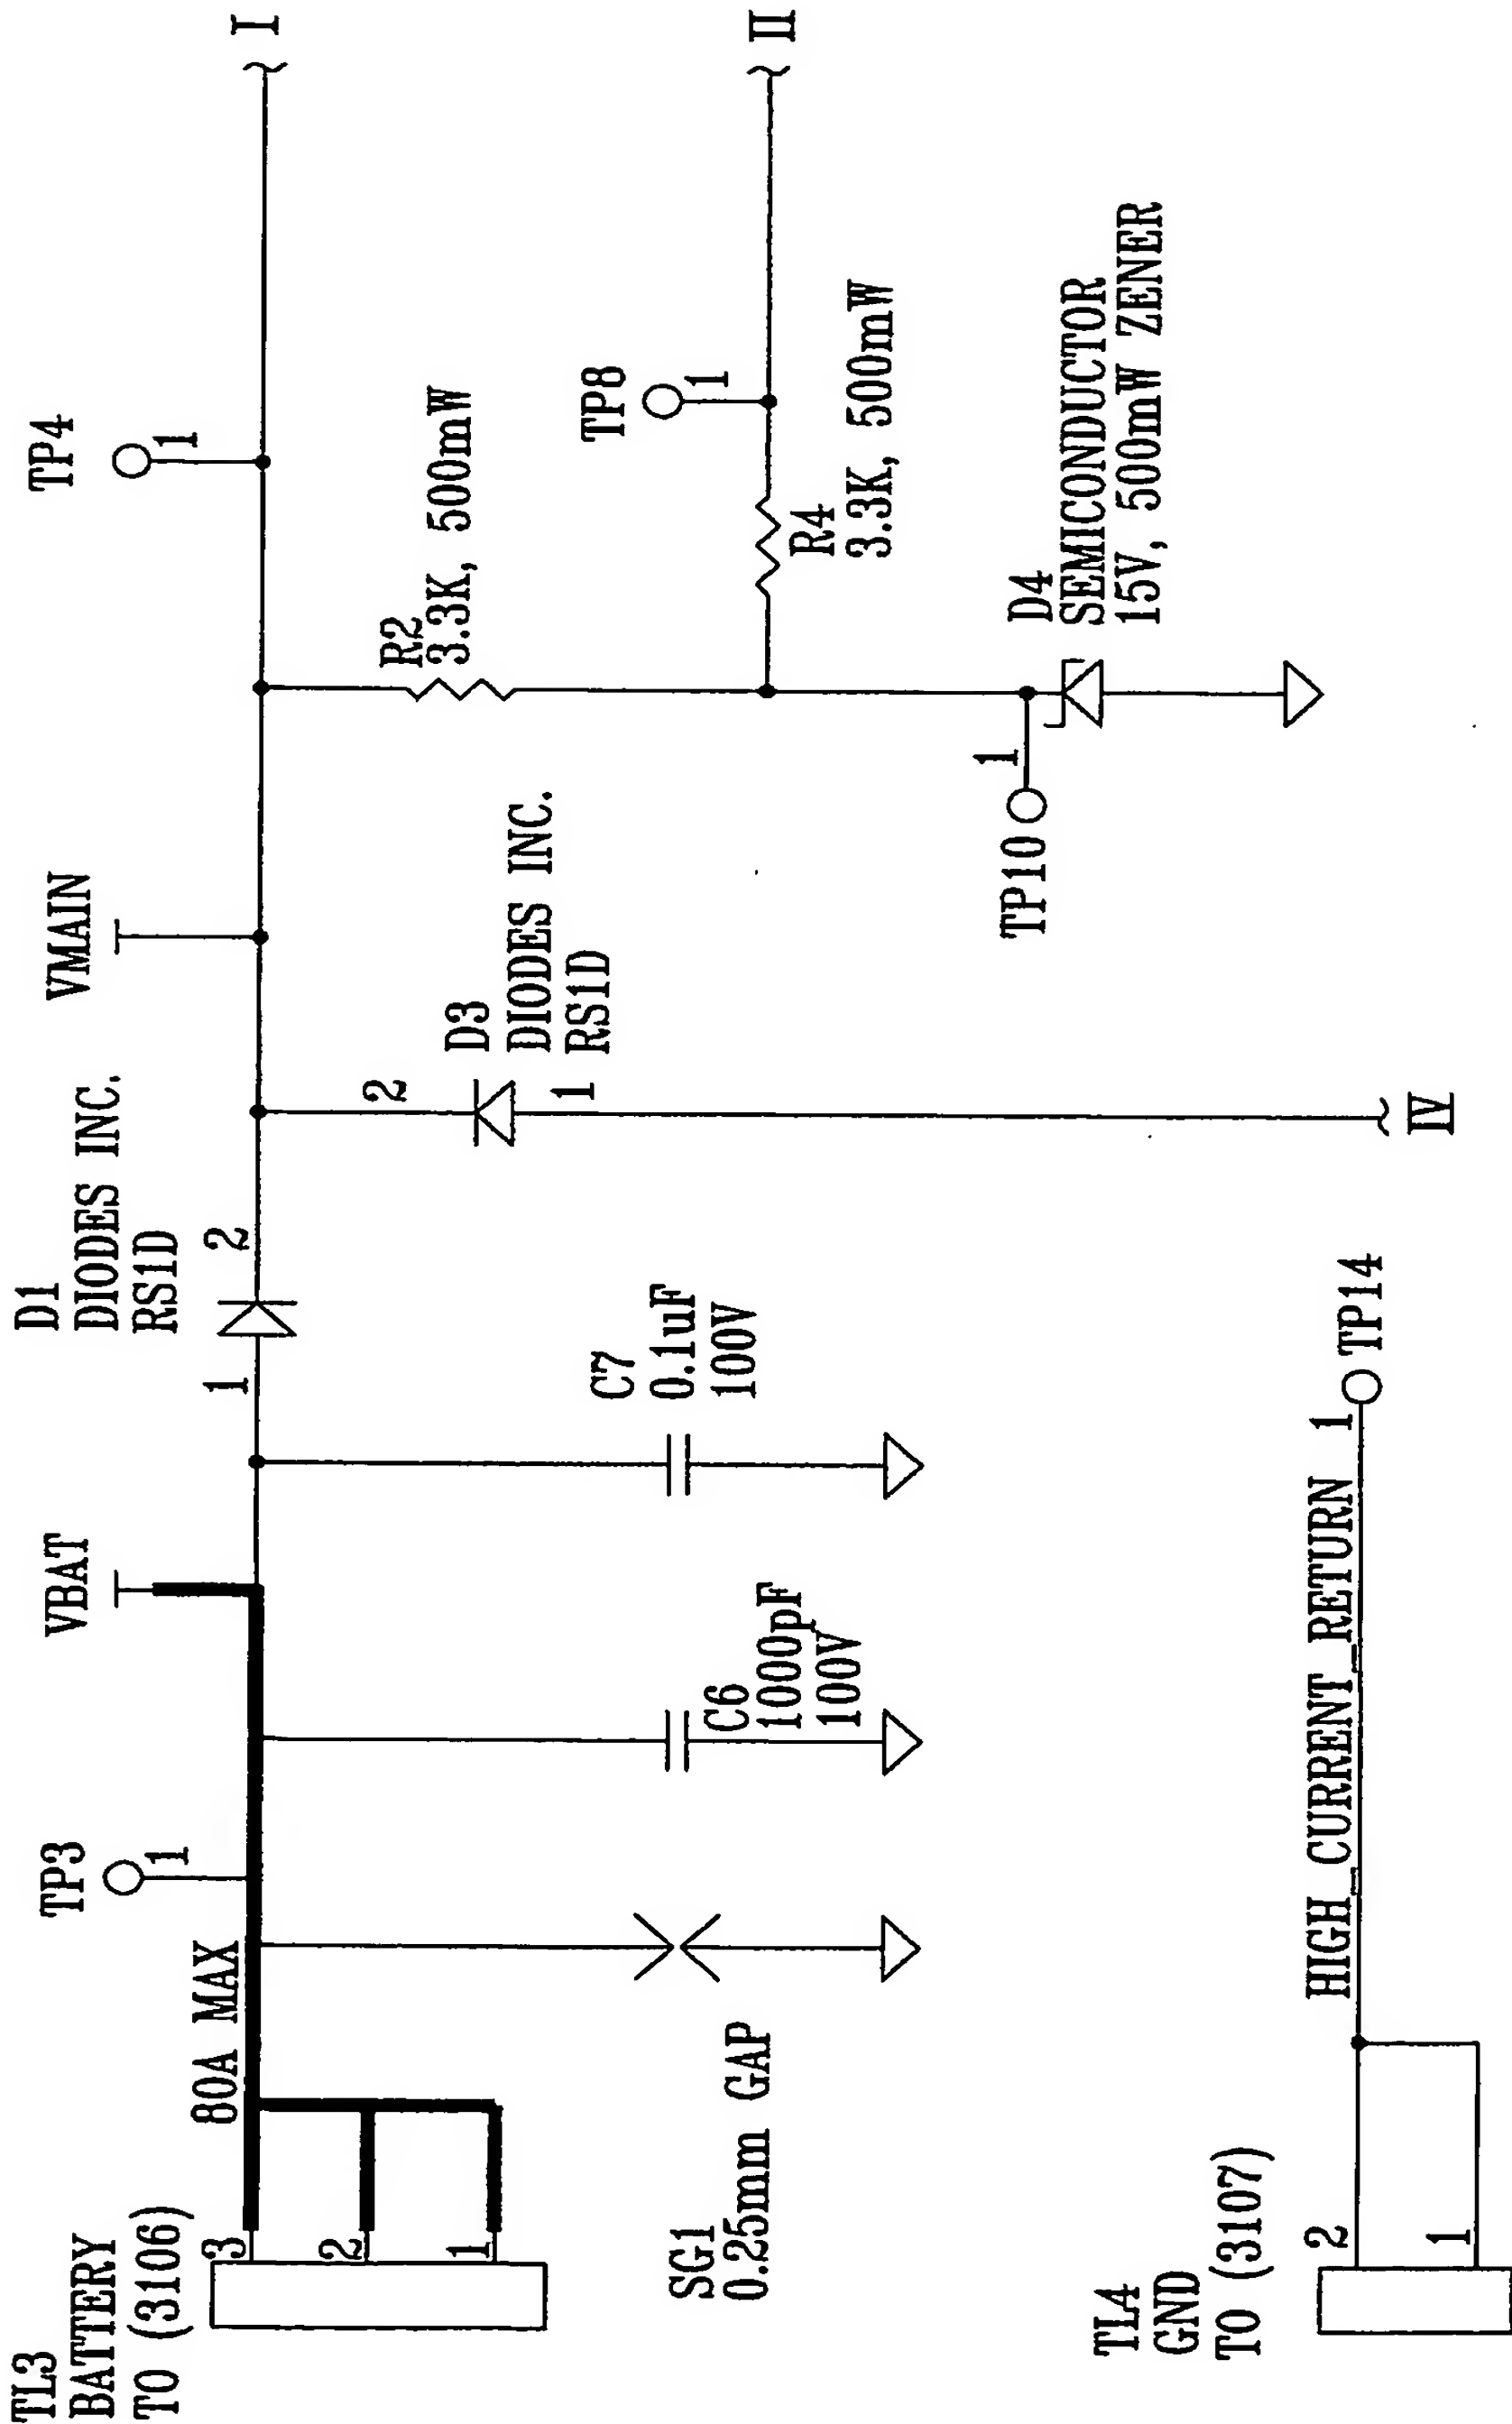


FIG. 24C/3

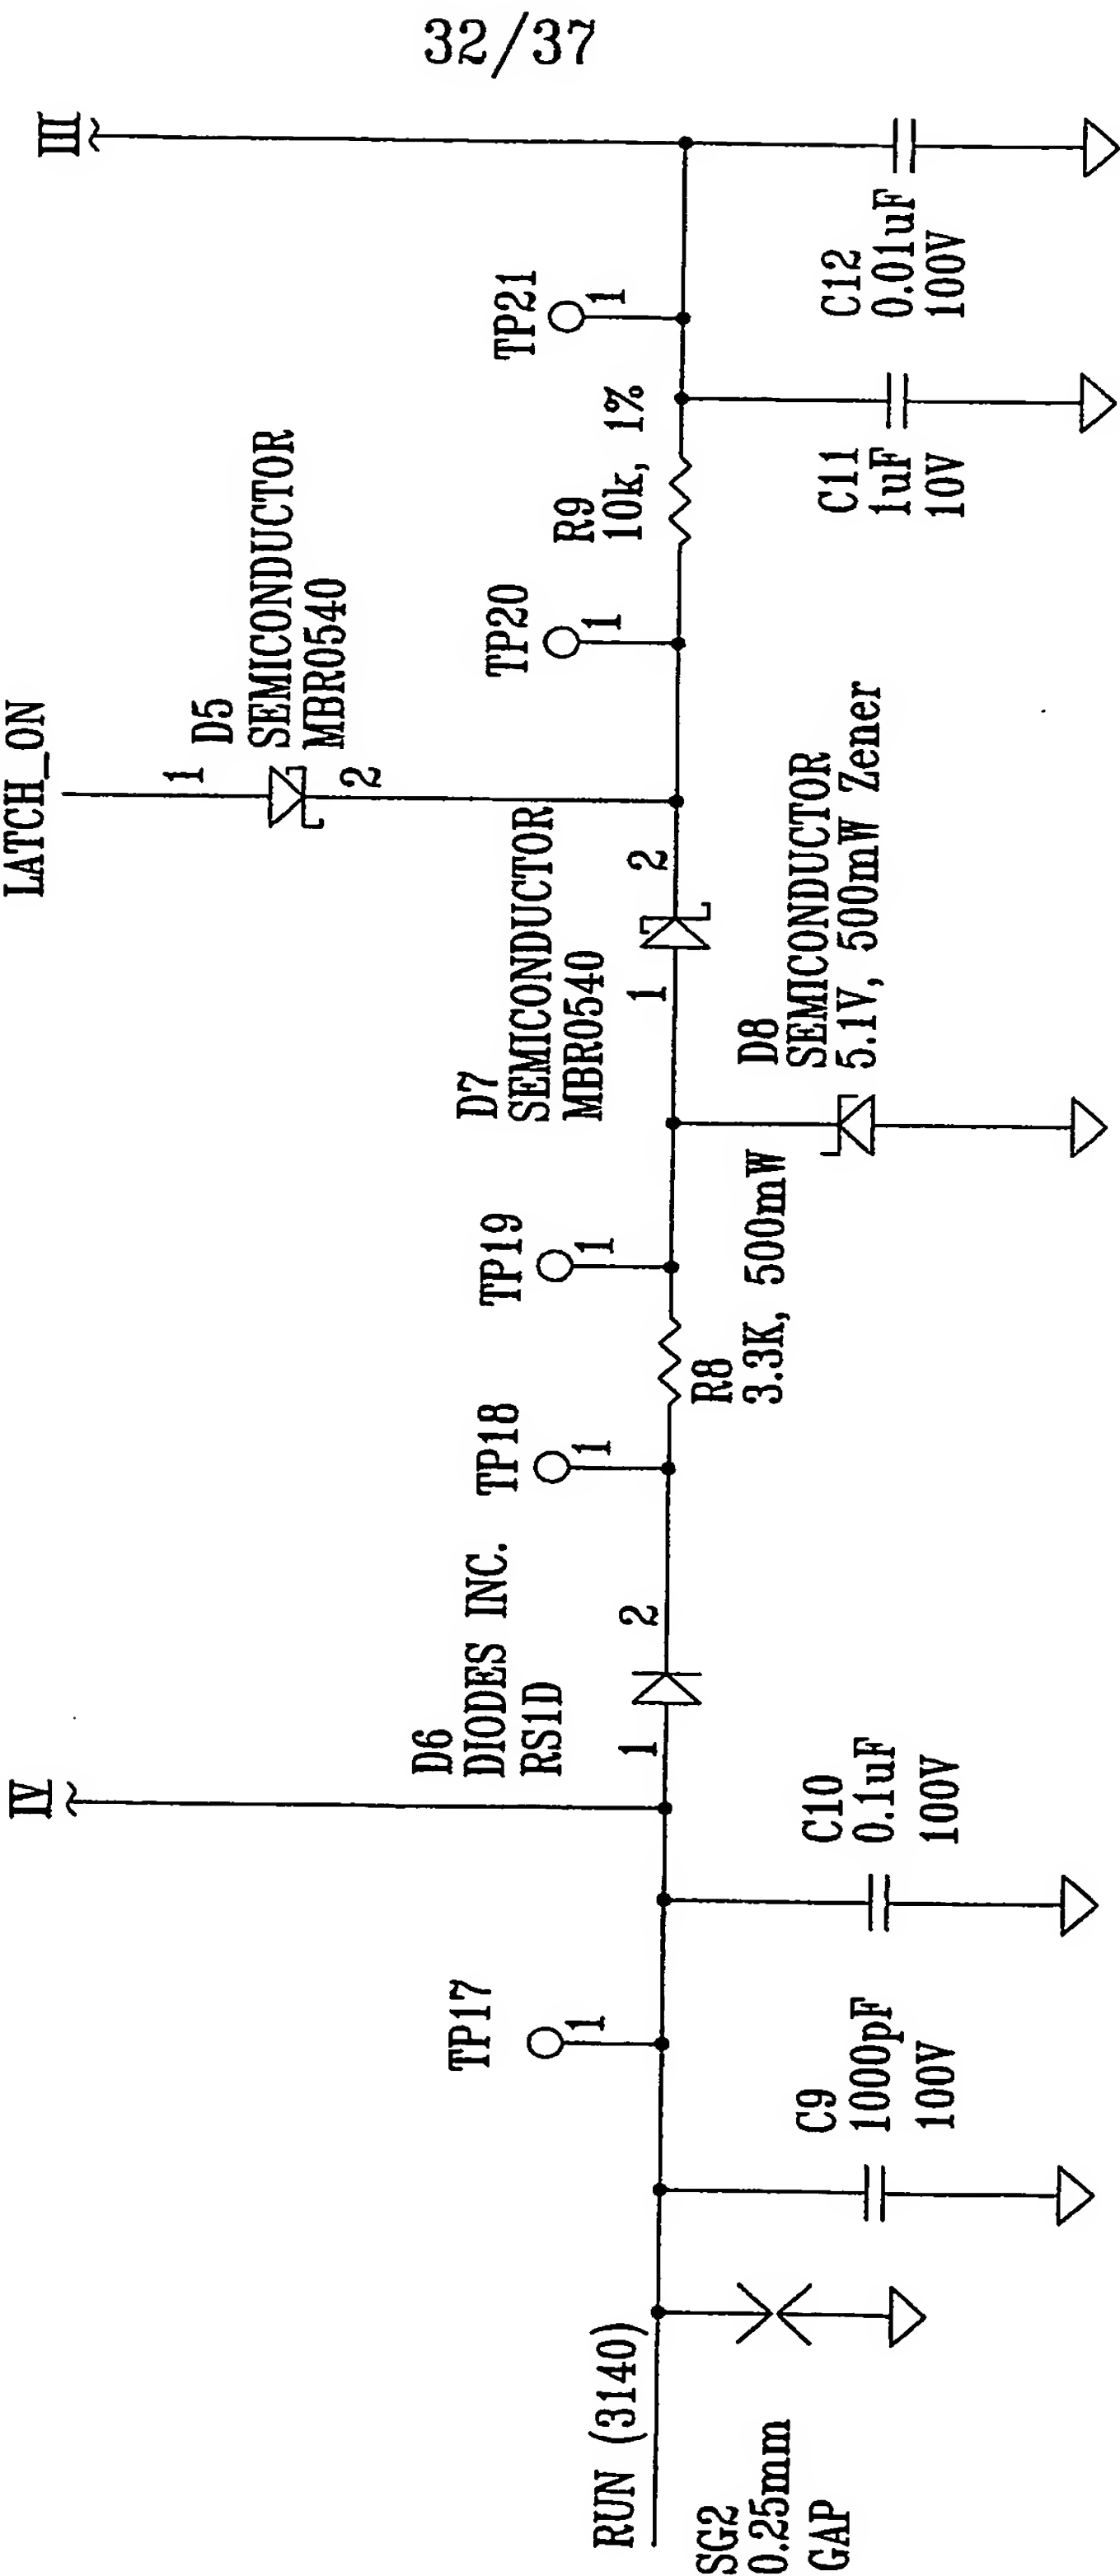


FIG. 24D



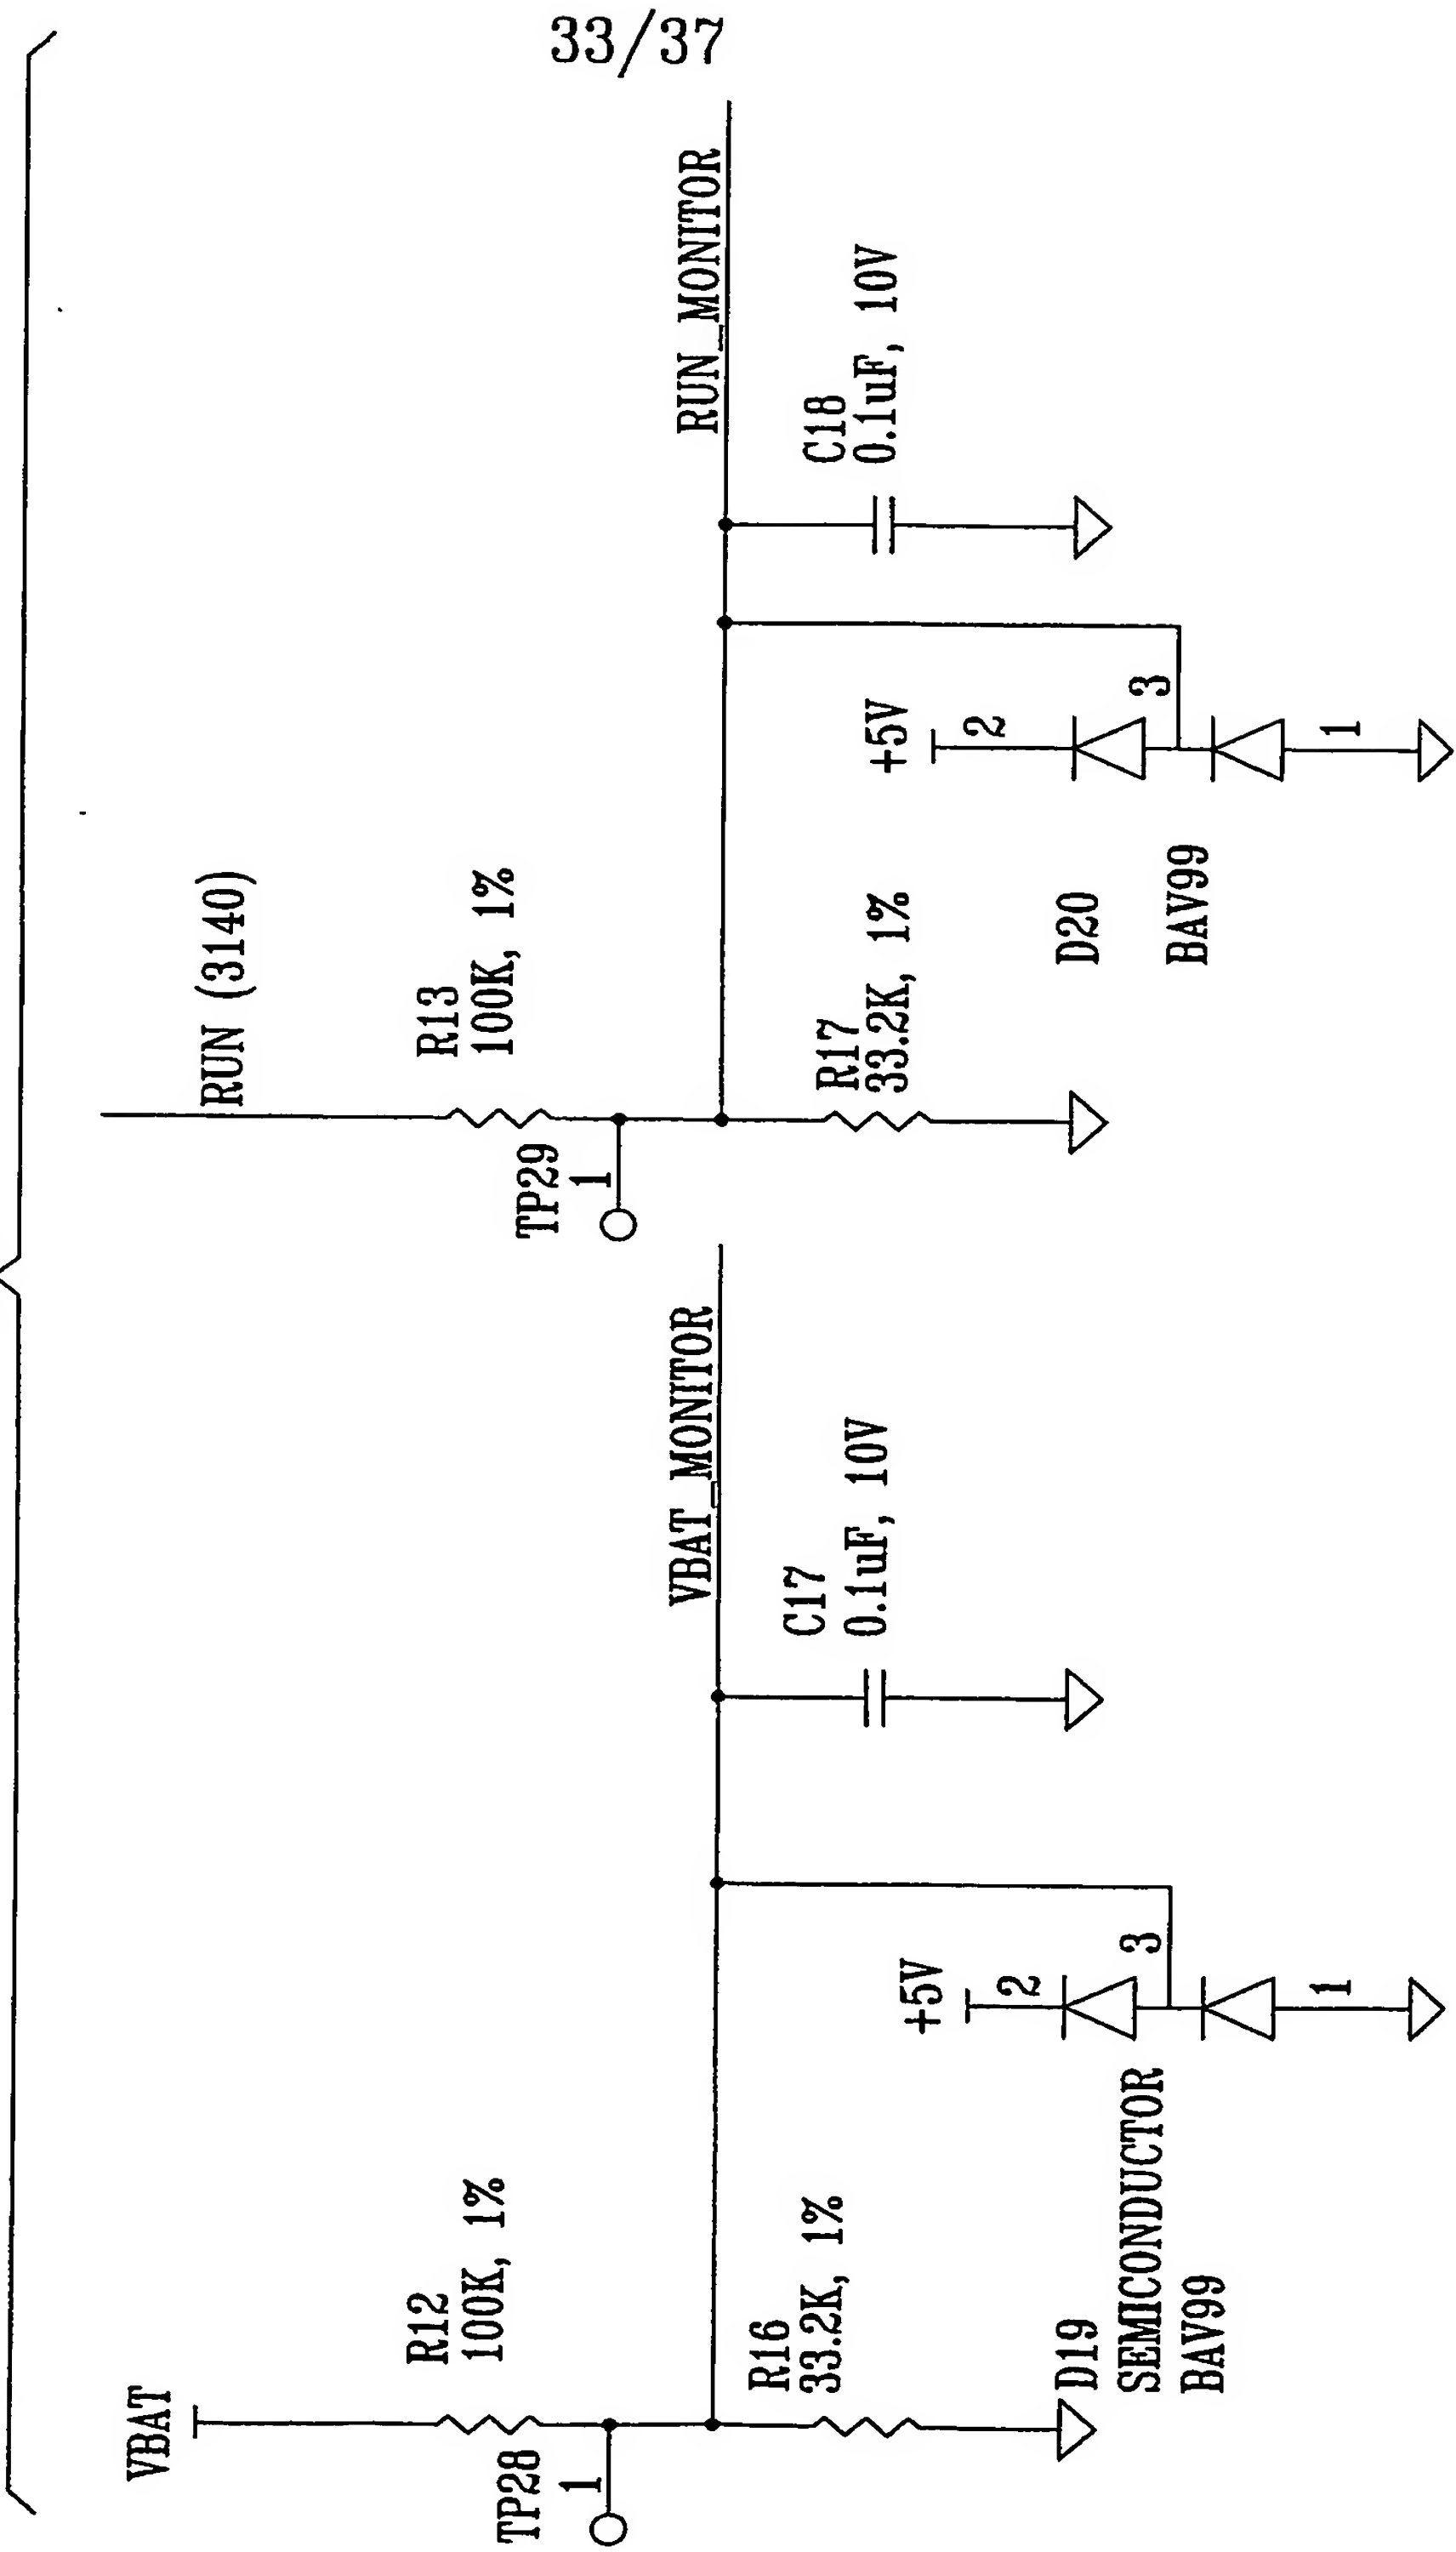



FIG. 24E

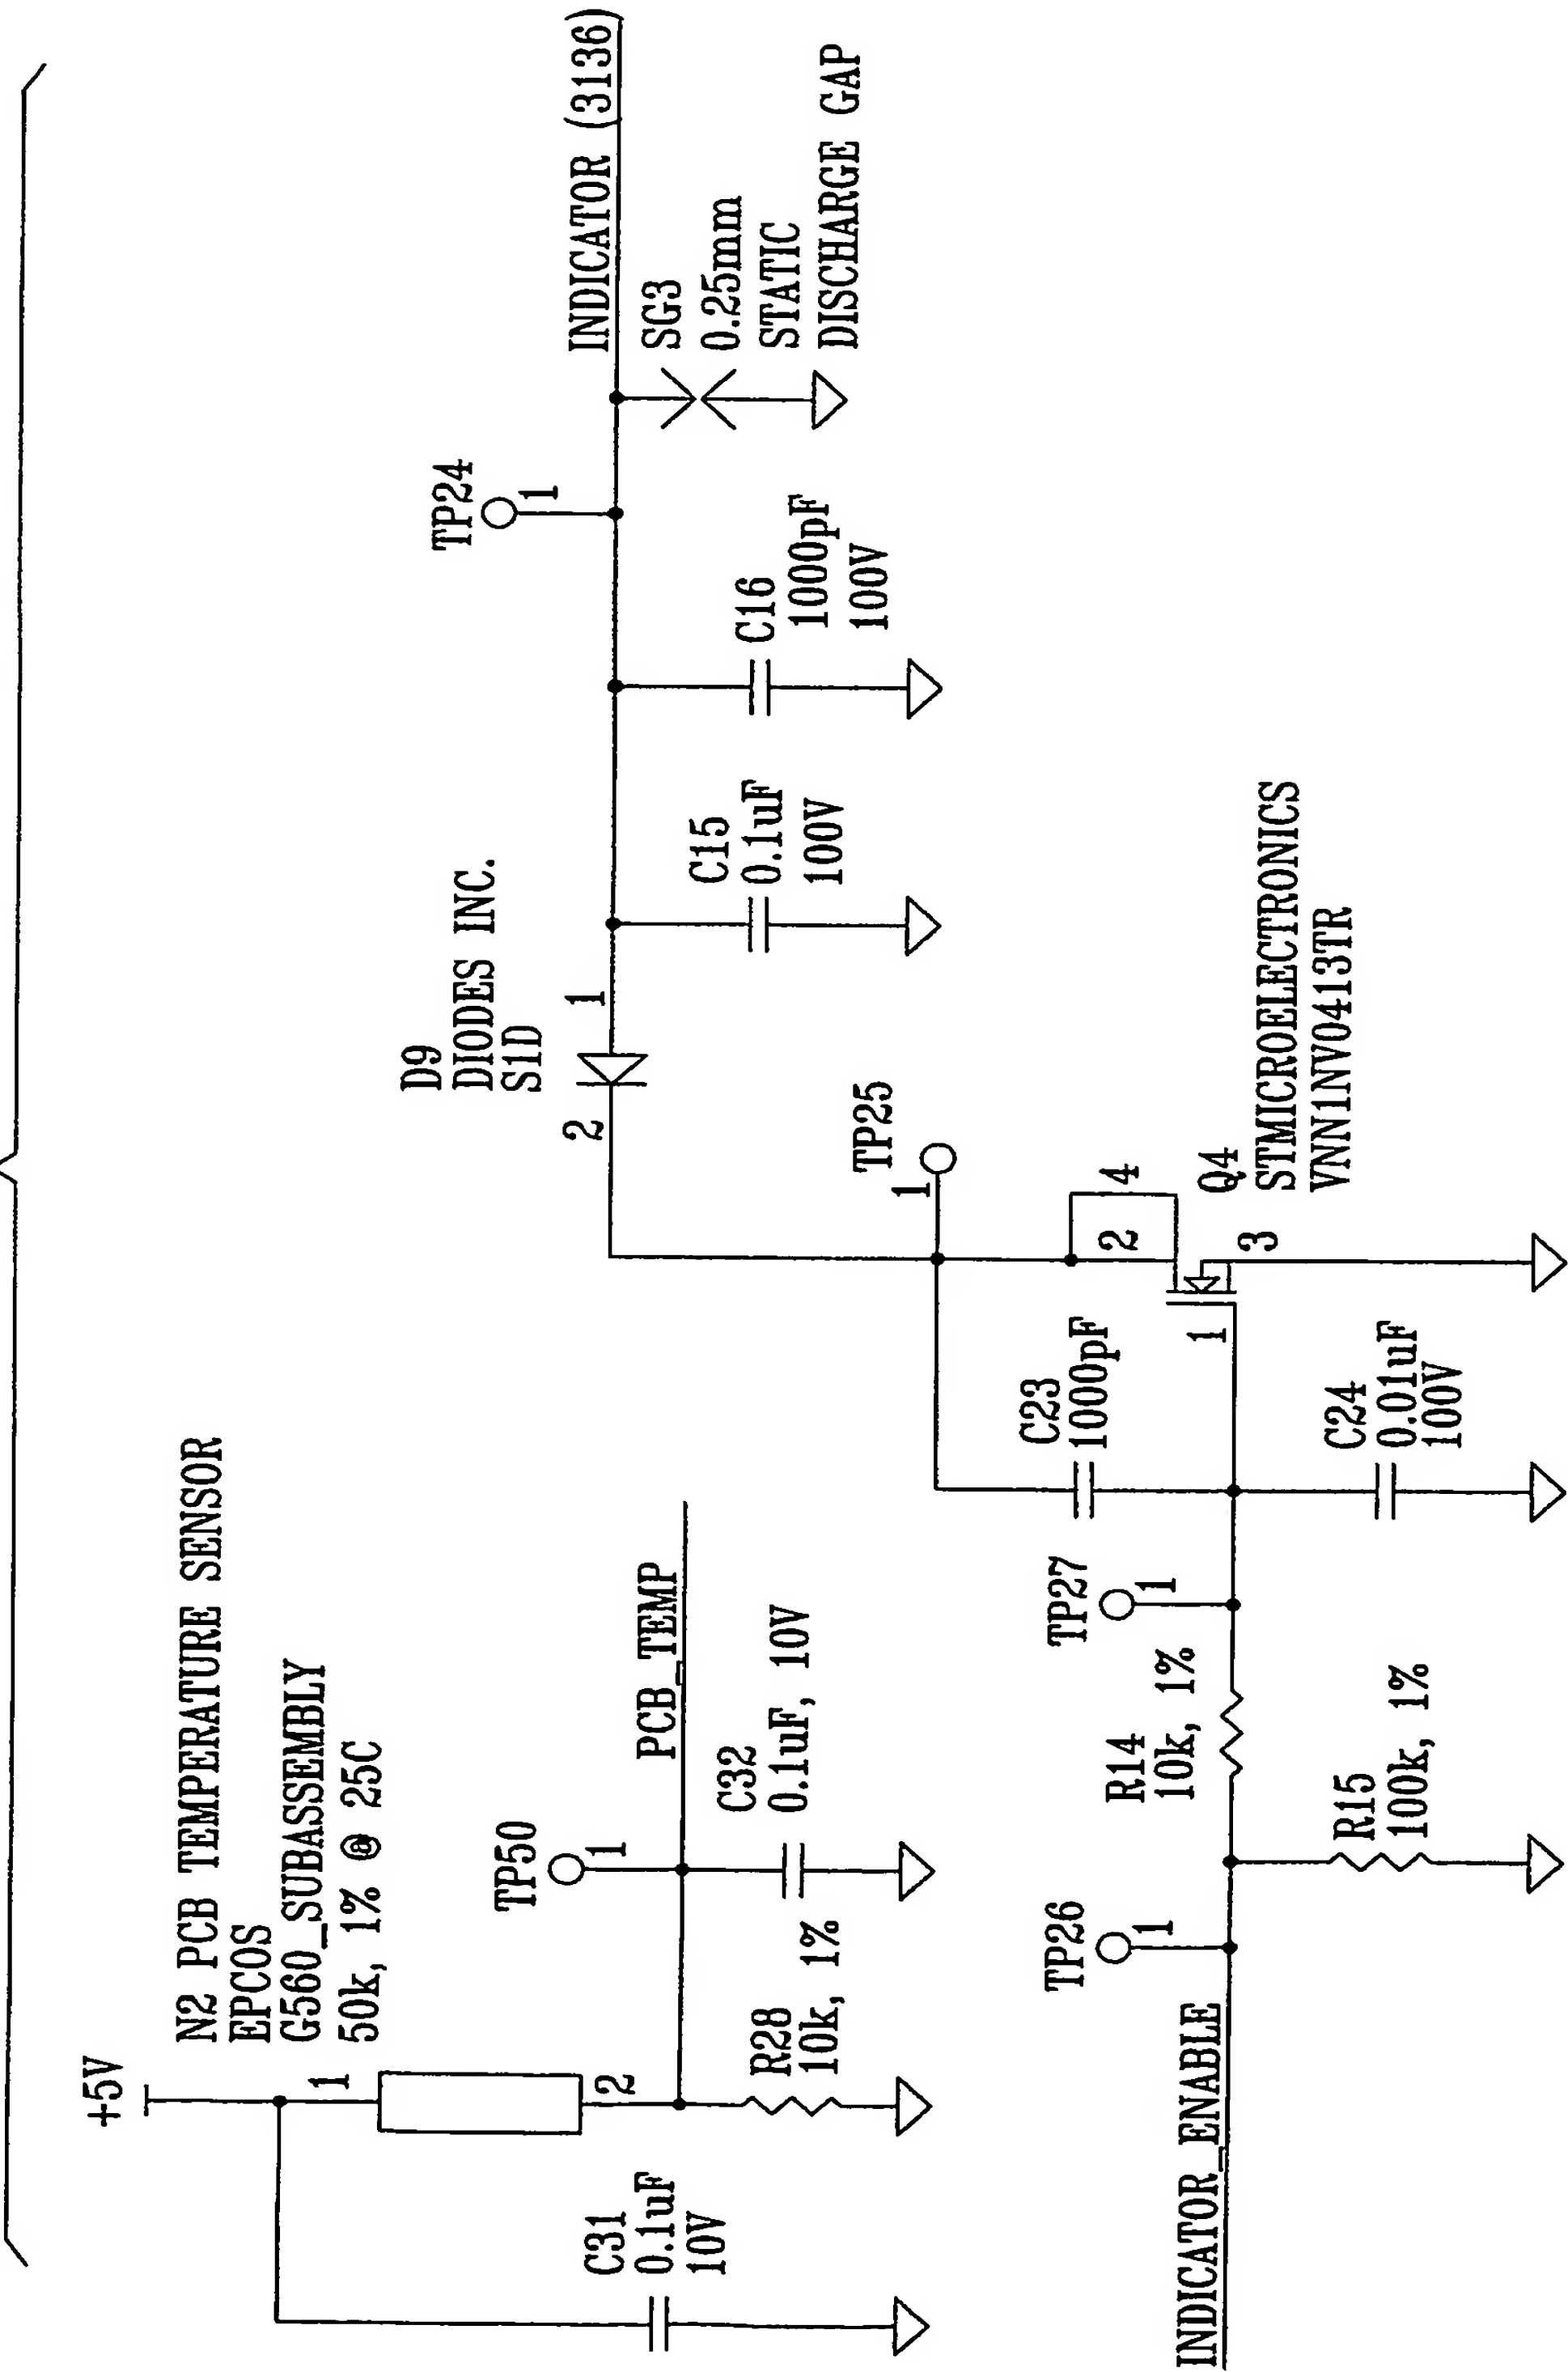

35/37

FIG. 24F

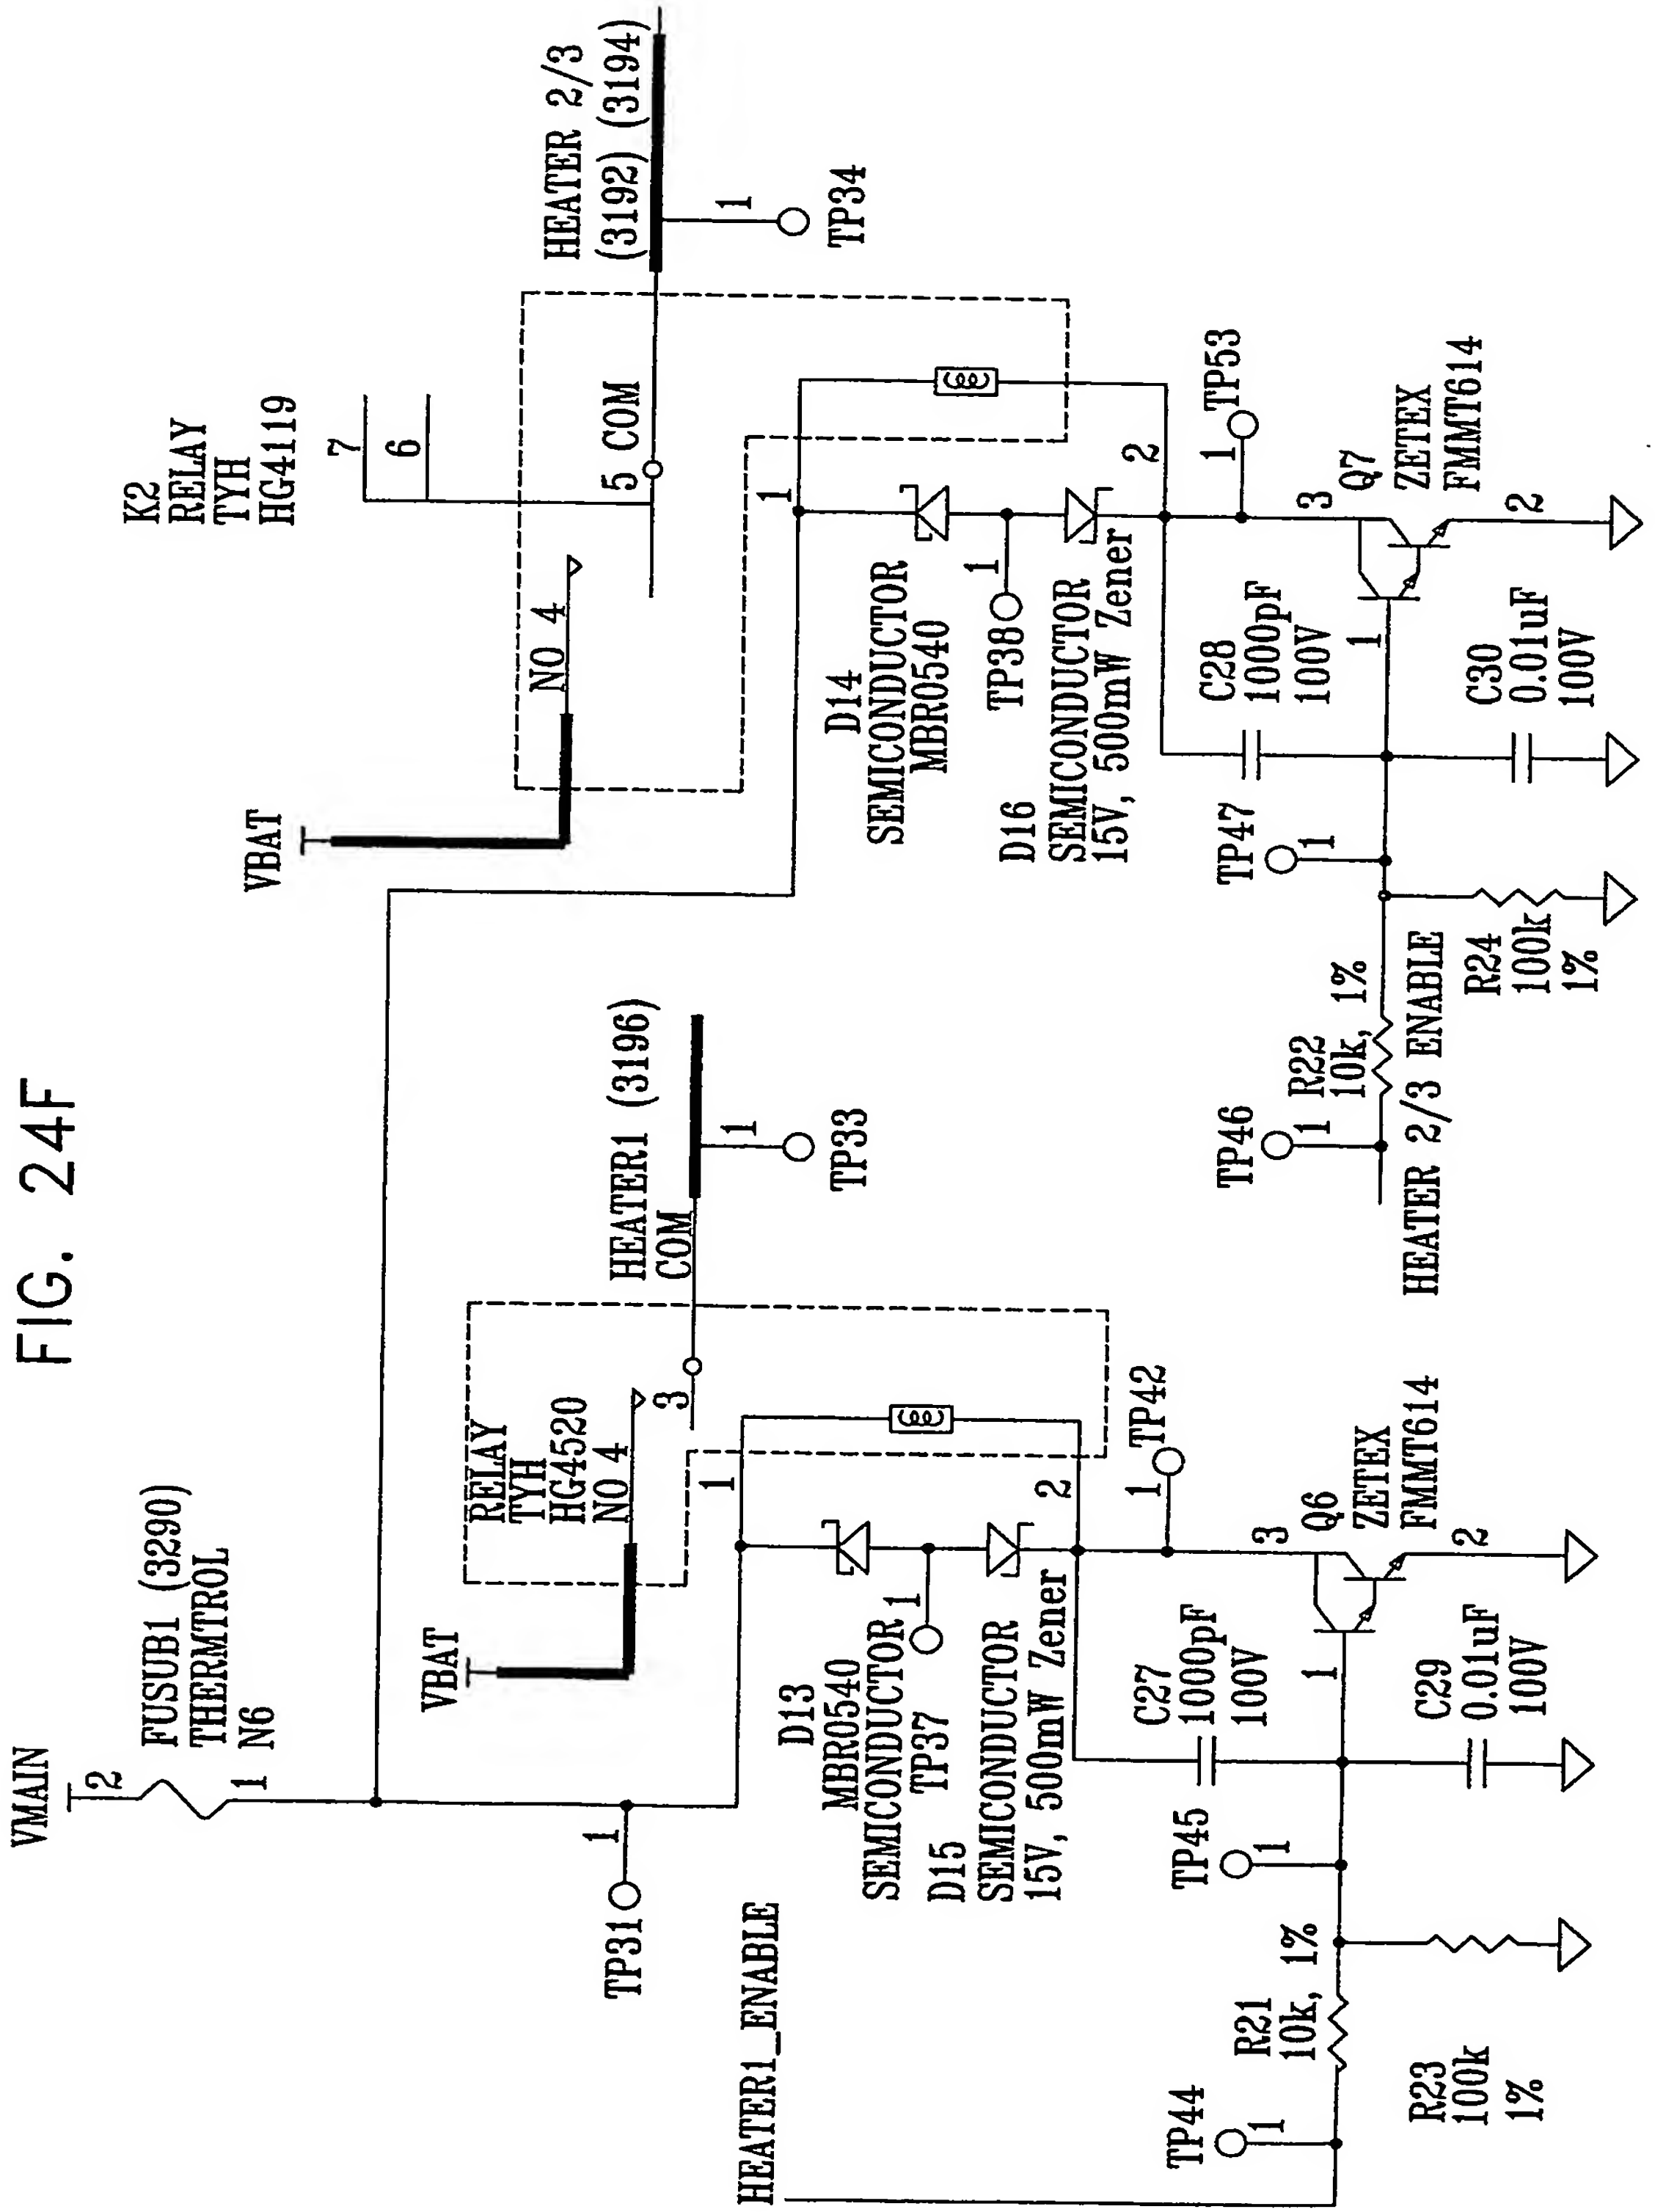

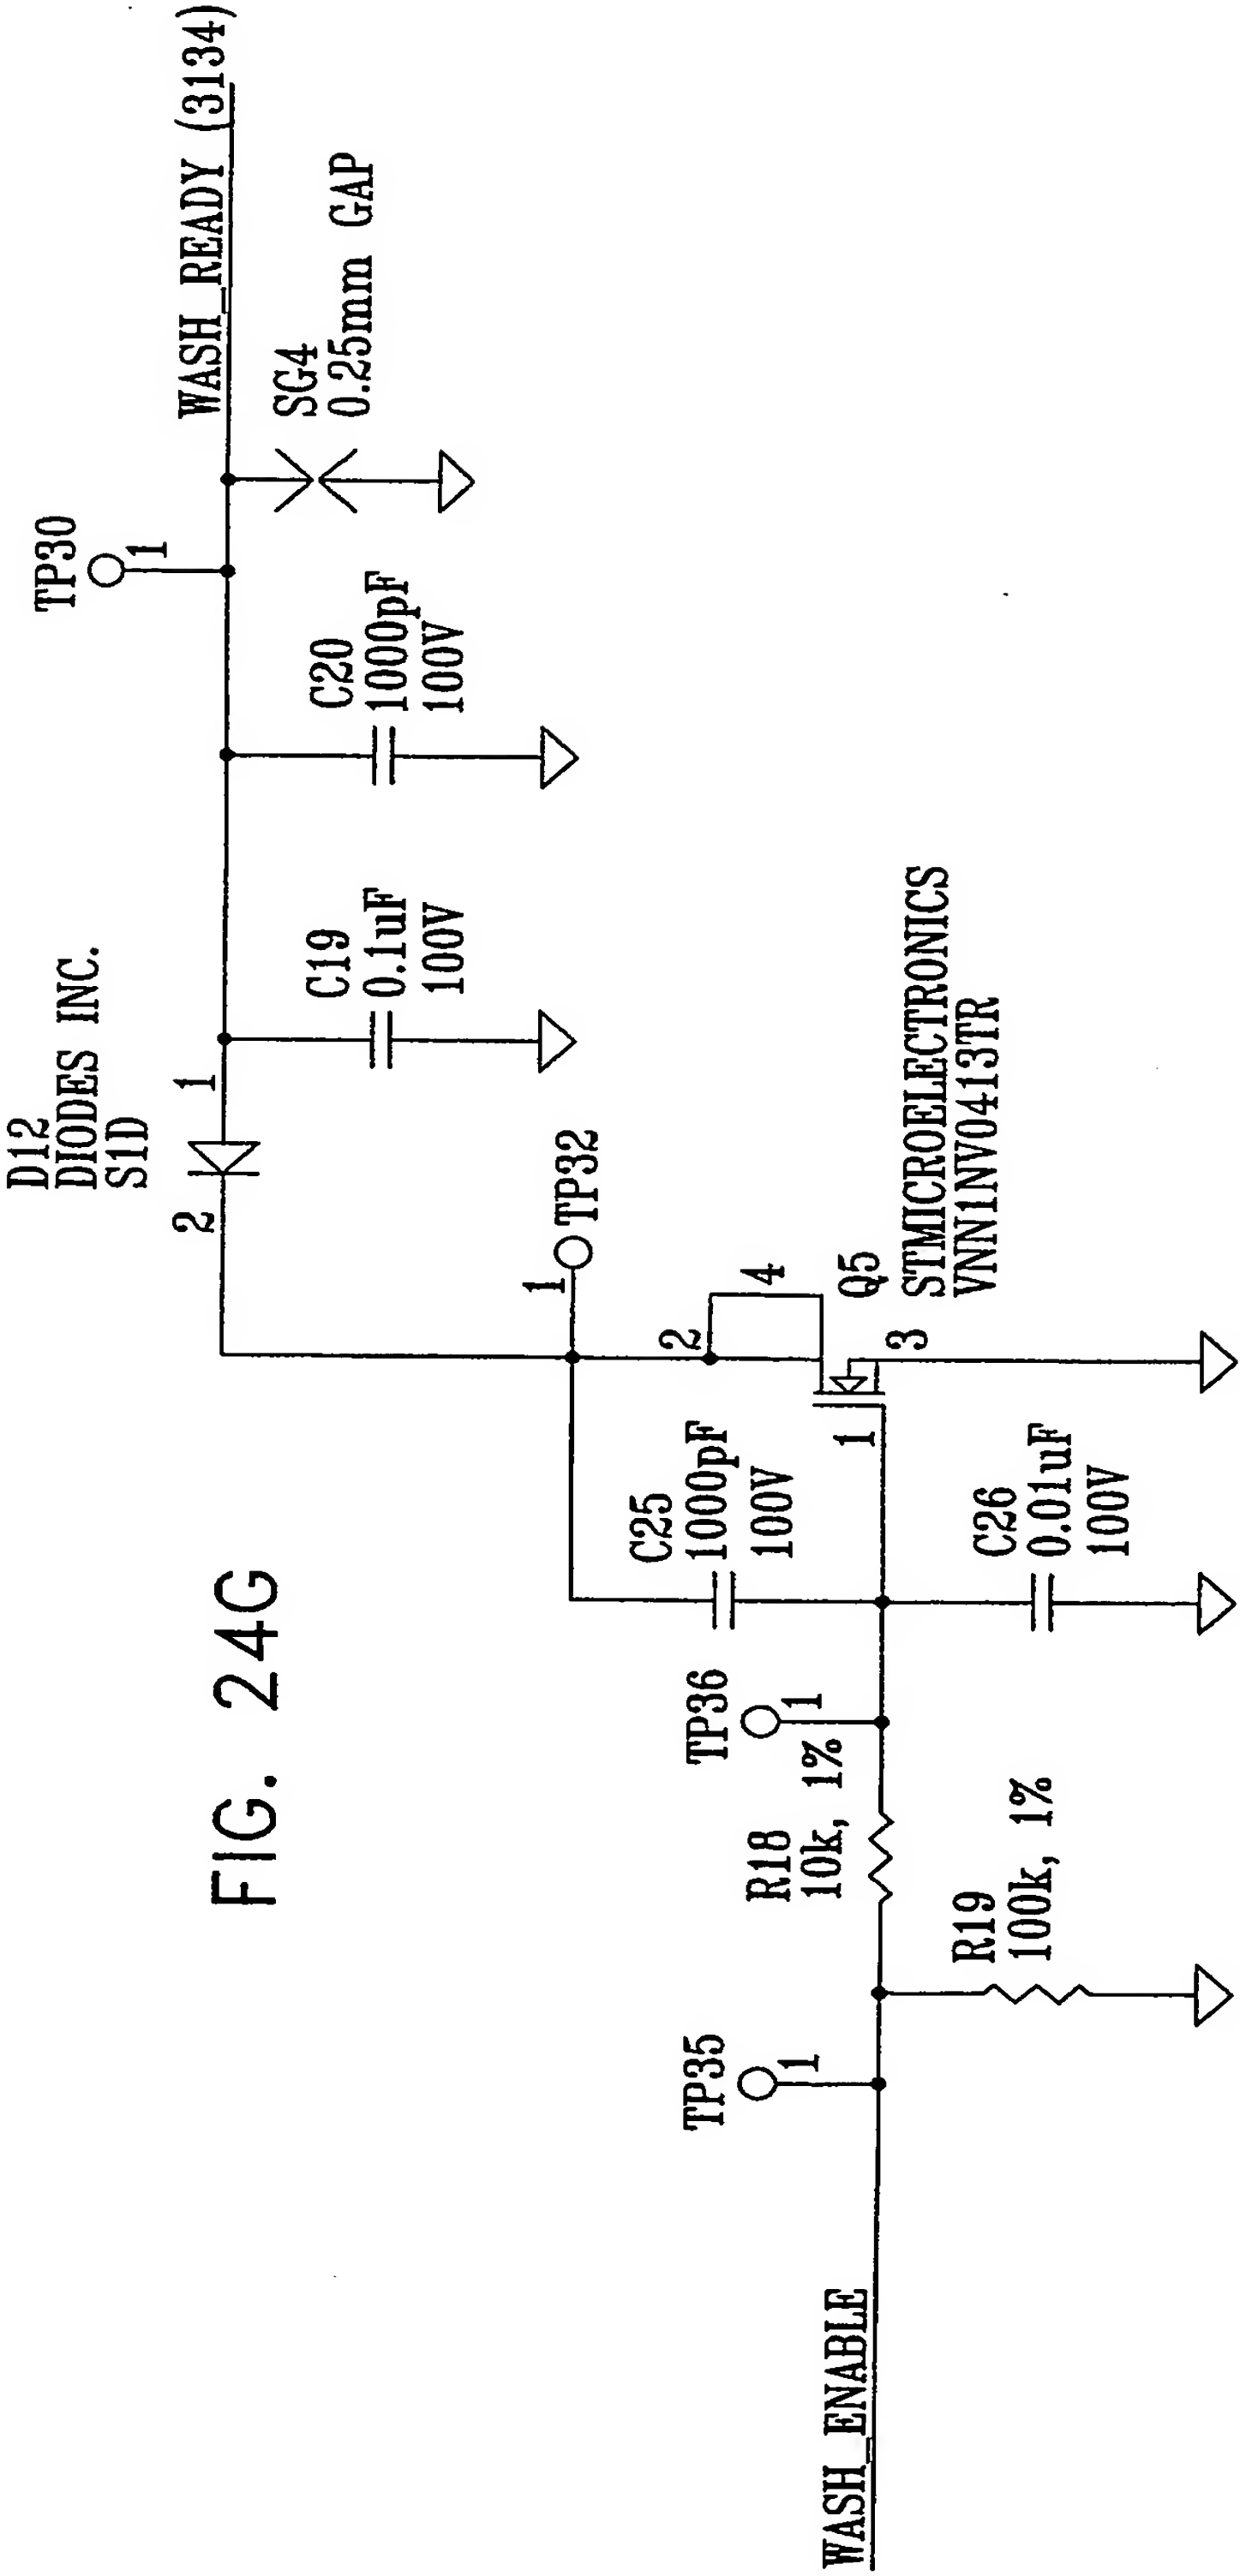

37/37

FIG. 24H

